



Характеристики

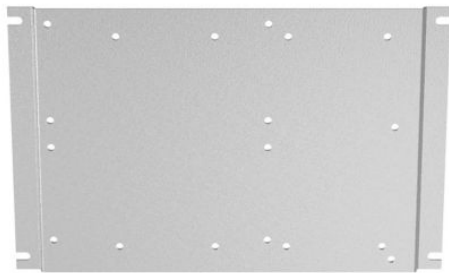

Eaton 240081

Eaton Moeller® series DILM Interlock, mechanical, for DILM80-150 DILM150-XMV

Загальні характеристики

PRODUCT NAME	Eaton Moeller® series DILM interlock
CATALOG NUMBER	240081
EAN	4015082400811
PRODUCT LENGTH/DEPTH	314 mm
PRODUCT HEIGHT	17.2 mm
PRODUCT WIDTH	196 mm
PRODUCT WEIGHT	0.76 kg
CERTIFICATIONS	CSA IEC/EN 60947-4-1 UL Category Control No.: NLDX CSA File No.: 012528 UL UL File No.: E29096 CSA-C22.2 No. 14-05 UL 508 CE CSA Class No.: 2411-03, 3211-04
MODEL CODE	DILM150-XMV

Кліматичні умови середовища

**AMBIENT OPERATING
TEMPERATURE - MAX** 60 °C

**AMBIENT OPERATING
TEMPERATURE - MIN** -25 °C

Перевірка конструкції

10.10 TEMPERATURE RISE Not applicable.

**10.11 SHORT-CIRCUIT
RATING** Is the panel builder's responsibility. The specifications for the switchgear must be observed.

**10.12 ELECTROMAGNETIC
COMPATIBILITY** Is the panel builder's responsibility. The specifications for the switchgear must be observed.

**10.13 MECHANICAL
FUNCTION** The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

**10.2.2 CORROSION
RESISTANCE** Meets the product standard's requirements.

**10.2.3.1 VERIFICATION OF
THERMAL STABILITY OF
ENCLOSURES** Meets the product standard's requirements.

**10.2.3.2 VERIFICATION OF
RESISTANCE OF
INSULATING MATERIALS
TO NORMAL HEAT** Meets the product standard's requirements.

**10.2.3.3 RESIST. OF
INSUL. MAT. TO
ABNORMAL HEAT/FIRE
BY INTERNAL ELECT.
EFFECTS** Meets the product standard's requirements.

**10.2.4 RESISTANCE TO
ULTRA-VIOLET (UV)
RADIATION** Meets the product standard's requirements.

10.2.5 LIFTING Does not apply, since the entire switchgear needs to be evaluated.

**10.2.6 MECHANICAL
IMPACT** Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 INSCRIPTIONS Meets the product standard's requirements.

**10.3 DEGREE OF
PROTECTION OF
ASSEMBLIES** Does not apply, since the entire switchgear needs to be evaluated.

**10.4 CLEARANCES AND
CREEPAGE DISTANCES** Meets the product standard's requirements.

**10.5 PROTECTION
AGAINST ELECTRIC
SHOCK** Does not apply, since the entire switchgear needs to be evaluated.

**10.6 INCORPORATION OF
SWITCHING DEVICES AND
COMPONENTS** Does not apply, since the entire switchgear needs to be evaluated.

10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH	Is the panel builder's responsibility.
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID	0 W
HEAT DISSIPATION CAPACITY PDISS	0 W
HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID	0 W
RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN)	0 A
STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS	0 W

Features & functions

FITTED WITH:	Mounting plate for contactor
---------------------	------------------------------

Загальні відомості

ACCESSORY/SPARE PART TYPE	Mechanical locking
PRODUCT CATEGORY	Accessories

Ресурси

	dilm150_xmv.stp
MCAD MODEL	eaton-accessories-mcad-drawings-dilm150-xmv.dwg
ІНСТРУКЦІЇ ЩОДО ВСТАНОВЛЕННЯ	eaton-contactor-accessories-dilm-x-il03406009z.pdf eaton-mechanical-interlock-dilm-xmv-il03407029z.pdf
КРЕСЛЕННЯ	eaton-contactors-front-plate-dilm-interlock-3d-drawing.eps

НАЗВА ПРОЕКТУ:

НОМЕР ПРОЕКТУ:

ПІДГОТУВАВ:

ДАТА:



Eaton Corporation plc Eaton House
30 Pembroke Road
Дублін 4, Ірландія
Eaton.com

© 2026 Eaton. Усі права захищені.

Стежте за нами в соціальних мережах, щоб отримувати актуальну інформацію про продукцію та технічну підтримку.

