



eX700 Series

User Manual





OPEN SOURCE SOFTWARE NOTICE

The complete list of the open source components included in the product, and the licenses thereof, may be found in the Web User Interface of the product itself, accessible via System Settings locally or at URL: https://IP/machine_config (System->Legal page).

For at least three (3) years from delivery of this product (and, if provided by the applicable license, for the period in which this product is officially supported by Exor International), Exor International will give to any third party who contacts it at the contact information provided below, for a charge no more than the cost of physically performing source code distribution, a complete machine-readable copy of the corresponding source code (as defined in the applicable license) and of the installation instructions (if provided for, and as defined by the applicable license) of the open source components covered under LGPL or GPL licenses or other licenses with the obligation to do so.

Contact Information: oss.it@exorint.com

Other information available at: <https://oss.exorint.com/>

EULA:

The installation or use of the software BSP implies acceptance of the terms and conditions (EULA) available here : <https://www.exorint.com/support/eula>

Copyright © 2022-2026 Exor International S.p.A.

Legal Headquarters: Via Monte Fiorino, n.13 - 37057 - San Giovanni Lupatoto (VR) - Italy

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

Third-party brands and names are the property of their respective owners.

www.exorint.com



Table of Contents

Introduction	4
Safety notices	5
1 Products Overview	6
2 Standards and Approvals	7
2.1 Product Identification	8
3 Technical Specifications	9
4 eX700M	11
4.1 Overview	11
4.2 Technical data	13
4.3 Mechanical dimensions	15
5 Optional plugin module identification	17
6 Installation Guidelines	20
6.1 Installation Environment	20
6.2 Safety Instruction	21
6.3 Installation Procedure	21
6.4 General Connection Diagram	22
6.4.1 Power Supply	22
6.4.2 Serial Port	23
6.4.3 Ethernet Port	24
6.4.4 Optional plugin module	24
6.4.5 Optional plugin module installation procedure	25
7 Battery	26
8 Special Instruction for Use	27
9 Getting Started	27
10 Environmentally-friendly disposal	28
11 Unpacking and Packing Instructions	29



Introduction

The operational guidelines described below is information which relates to the device, installation, transportation, storage, assembly, use and maintenance.

This Operating Instruction describes the main features of the Exor operator panels. The manual refers to the following models:

Model	Part Number	Description
eX705	EX705U5P1	HMI 5" TFT 800x480, PCAP Touch, 2x Ethernet, JMobile runtime
eX707	EX707U5P1	HMI 7" TFT 800x480, PCAP Touch, 3x Ethernet, JMobile runtime
eX710	EX710U5P1	HMI 10.1" TFT, 1280x800, PCAP Touch, 3x Ethernet, JMobile runtime
eX712	EX712U5P1	HMI 12.3" TFT, 1920x720, PCAP Touch, 3x Ethernet, JMobile runtime
eX715	EX715U5P1	HMI 15.6" TFT 1366x768, PCAP Touch, 3x Ethernet, JMobile runtime
eX721	EX721U5P1	HMI 21.5" TFT, 1920x1080, PCAP Touch, 3x Ethernet, JMobile runtime

Model	Part Number	Description
eX707G	EX707GU5P1	HMI 7" TFT, PCAP Touch, sunlight-readable with bonding, 3x Ethernet, JMobile runtime
eX710G	EX710GU5P1	HMI 10" TFT, PCAP Touch, sunlight-readable with bonding, 3x Ethernet, JMobile runtime



Safety notices

The manual contains safety standards that must be respected for the personal safety and to avoid damage. All safety notices in this manual are specified as follows:

**INFORMATION!**

Respecting guidelines and regulations avoids errors.

**CAUTION!**

Respecting guidelines and regulations avoids injuries or damage to material

**WARNING!**

Respecting guidelines and regulations avoids severe injuries or damage to material

**DANGER!**

Respecting guidelines and regulations avoids life-risks



1 Products Overview

eX 700 Series HMI products combine state-of-the-art connectivity features and top performance in a great design. Products have been designed as IoT edge devices with the combination of a powerful controller with networking capability (up to 3 Ethernet networks) and outstanding communication options including client/ server OPC UA. They are the ideal choice for all demanding IoT edge applications in factory, marine and building automation.

The glass projected capacitive touchscreen and the brilliant displays with size up to 21.5" and resolution up to 1920x1080 guarantee great optical performance; with the support of multitouch gesture programming they can create the most natural human interfaces.

eX700G Series combine high-performance sunlight-readable display with state-of-the-art connectivity features and top performance in a great design maintaining as a design commitment the fact that the product is likely to be used in environments where the safety of operators is at risk. The glass projected capacitive touchscreen and the display are bonded to guarantee the highest optical performance and resistance in such environments.

- eX700 Series products have been designed to run the JMobile software for powerful HMI applications
- Gateway function with OPC UA Server and Client
- Secure connectivity with JMcloud and full network separation
- Powerful browser with industry standard Web engines
- Optional CODESYS V3 PLC runtime with choice of major I/O protocols
- Optional plug-in modules for fieldbus systems, I/O and controllers





2 Standards and Approvals

The products have been designed for use in an industrial environment in compliance with the 2014/30/EU EMC Directive.

The products have been designed in compliance with:

EN 61000-6-4	CISPR 22 Class A CISPR 16-2-3
EN 61000-6-2	EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6 EN 61000-4-8 EN 61000-4-11 EN 61000-4-29 EN60945
IECEX	IECEX: IECEX ULD 17.0019X
IEC 60079-0	Ex ec IIC T5...T4 Gc 0°C≤Tamb≤+50°C or -20°C≤Tamb≤+60°C
IEC 60079-7	Ex tc IIIC T95°C Dc
IEC 60079-31	
ATEX	DEMKO 17 ATEX 1871X
EN IEC 60079-0	 II 3G Ex ec IIC T5...T4 Gc 0°C≤Tamb≤+50°C or -20°C≤Tamb≤+60°C
EN IEC 60079-7+A1	II 3D Ex tc IIIC T95°C Dc
CENELEC EN 60079-31	

The installation of these devices into the residential, commercial and light-industrial environments is allowed only in the case that special measures are taken in order to ensure conformity to EN 61000-6-3.

The products are in compliance with the Restrictions on Certain Hazardous Substances (RoHS) Directives 2011/65/EU + (EU) 2015/863.

In compliance with the above regulations the products are CE marked.

Products described in this manual may have other approvals and certificates.
Please refer to product datasheets available at www.exorint.com




2.1 Product Identification

The product may be identified through a plate attached to the rear cover. You will have to know the type of unit you are using for correct usage of the information contained in the guide.

An example of this plate is shown in the figure below:

Note: the eX707 label is used as an example for eX700 Series.

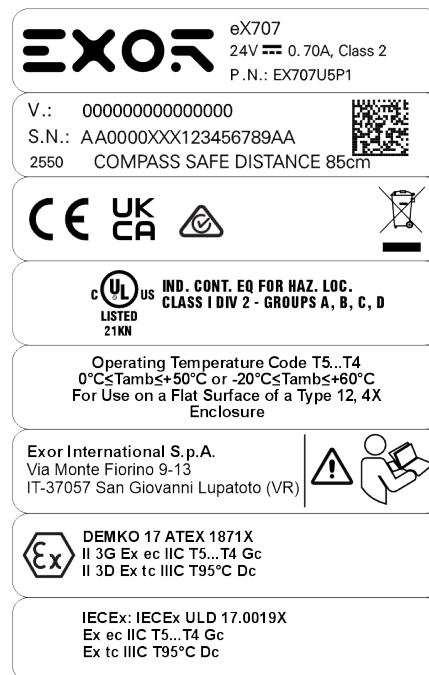

product model name	eX707
product part number	EX707U5P1
year/week of production	2550
serial number	AA0000XXX123456789AA
version id of the product	0000000000000000
manufacturer address	Exor International S.p.A. Via Monte Fiorino 9-13 IT-37057 San Giovanni Lupatoto (VR)
ATEX Marking	DEMKO 17 ATEX 1871X  II 3G Ex ec IIC T5...T4 Gc 0°C ≤ Tamb ≤ +50°C or -20°C ≤ Tamb ≤ +60°C II 3D Ex tc IIIC T95°C Dc
IECEx Marking	IECEx: IECEx ULD 17.0019X Ex ec IIC T5...T4 Gc 0°C ≤ Tamb ≤ +50°C or -20°C ≤ Tamb ≤ +60°C Ex tc IIIC T95°C Dc



3 Technical Specifications

Touchscreen technology	Projected capacitive
Back-up battery	3V 50mAh Lithium, rechargeable, not user-replaceable, model VL2330.
Fuse	Automatic
Serial Port	RS-232, RS-485, RS-422 software configurable
Flash	4 GB for eX705, eX707, eX710, eX707G, eX710G 8 GB for eX712, eX715, eX721
RAM	512 MB for eX705, 1GB for eX707, eX710, eX707G, eX710G 2 GB for eX712, eX715, eX721
Hardware clock	Clock/Calendar with back-up battery
Accuracy RTC (at 25°C)	<100ppm

Environmental Conditions

Operating temperature (surrounding air temperature)	-20 ÷ +60°C (vertical installation) Plug-in modules and USB devices may limit max temperature to +50°C	EN 60068-2-14
Storage temperature	-20°C to +70°C	EN 60068-2-1 EN 60068-2-2 EN 60068-2-14
Operating and storage humidity	5 - 85% RH, non condensing	EN 60068-2-30
Vibrations	5 - 9 Hz, 7 mm _{pp} 9 - 150 Hz, 1g	EN 60068-2-6
Shock	± 50 g, 11ms, 3 pulses per axis	EN 60068-2-27
Protection class	IP66 (front), IP20 (rear) not UL evaluated	EN 60529

Electromagnetic Compatibility (EMC)

Radiated disturbance test	Class A	CISPR 22 CISPR 16-2-3
Electrostatic discharge immunity test	± 8 kV (air electrostatic discharge) ± 4 kV (contact electrostatic discharge)	EN 61000-4-2
Radiated, radio-frequency, electromagnetic field immunity test	80 MHz ÷ 6 GHz, 10V/m 1.4 GHz ÷ 2 GHz, 3 V/m 2 GHz ÷ 2.7 GHz, 1 V/m	EN 61000-4-3
Burst immunity test	± 1 KV dc power port ± 1 KV signal line	EN 61000-4-4
Surge immunity test	± 0.5 KV dc power port (line to earth) ± 0.5 KV dc power port (line to line) ± 1 KV signal line (line to earth)	EN 61000-4-5
Immunity to conducted disturbances induced by radiofrequency field	0.15 ÷ 80 MHz, 10V	EN 61000-4-6
Power frequency magnetic field immunity test	Enclosure, 50/60Hz, 30A/m	EN 61000-4-8

**Voltage dips, short interruptions and voltage variations immunity test**

Port: AC mains; Level:	
100% duration:	1 CYCLE AND 250 CYCLES (50HZ); 1 CYCLE AND 300 CYCLES (60HZ);
40% duration:	10 CYCLES (50HZ); 12 CYCLES (60HZ);
70% duration:	25 CYCLES (50HZ); 30 CYCLES (60HZ);
Phase: 0°-180°	

Test executed on the 230Vac side of the Exor International S.p.A. Power Supply

EN 61000-4-11

Port: DC mains; Level:	
0% duration:	10MS 20 SPACES BY 1S

Test executed on the 24Vdc of the EUT

EN 61000-4-29

Durability information**Backlight service life (LED type)**

40000 Hrs. or more
(Time of continuous operation until the brightness of the backlight reaches 50% of the rated value when the surrounding air temperature is 25°C) - see Note 1

Note 1: Extended use in environments where the surrounding air temperature is 40°C or higher may degrade backlight quality/reliability/durability.

Surface resistance

Chemical resistance of the front glass for an exposure time of 24 hours without visible changes:

- Betadine (10% Povidone Solution)
- Cola
- Electrode Gel/Paste
- Hydrogen Peroxide (3% Solution)
- NaCl (0.9% Solution)
- Coffee
- Dextrose (5% Glucose Solution)
- Hydrogen chloride (0.5% Solution PH=1)
- Isopropyl Alcohol
- Sodium Hypochlorit
- Ethyl Alcohol (70%-90%)
- Quaternary ammonium compound

PCAP Touch Screen Operation with Gloves

The touchscreen display is based on projected capacitive (PCAP) technology and is suitable for operation with or without gloves. Due to the wide variety of commercially available gloves, however, EXOR cannot guarantee compatibility with all types. Functional tests were performed using the following types of gloves:

- Tight-fitting elastomeric gloves (e.g. latex), with an indicative thickness of less than 0.2 mm
- Dissipative textile (ESD) gloves, with an indicative thickness of up to 0.8 mm
- Light work gloves with a thin coating, with an overall thickness of up to approximately 1.1 mm


The use of thicker, insulating, multilayer, or rigid-coated gloves may reduce or prevent correct touch detection.



4 eX700


4.1 Overview

eX705

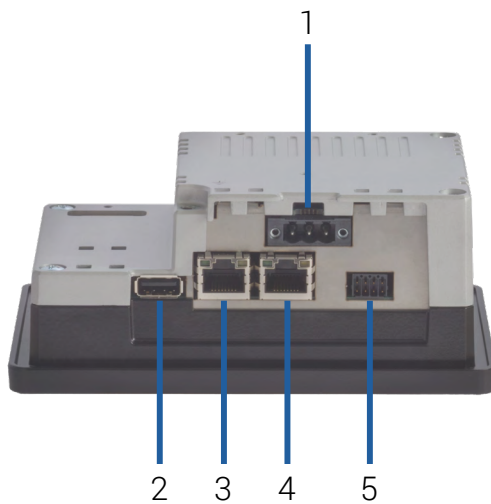

SIDE

- 1 Power Supply
- 2 USB Port V2.0, max. 500mA (For maintenance only)
- 3 Ethernet Port 0 (10/100 Mb)
- 4 Ethernet Port 1 (10/100 Mb)
- 5 Serial Port

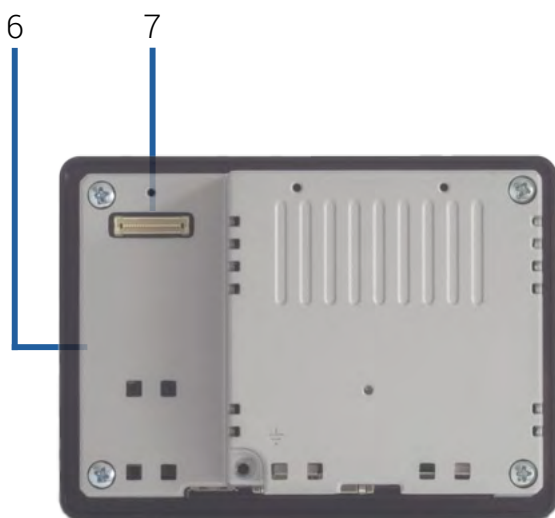


BACK SIDE

- 6 SD Card slot
- 7 Expansion slot for Plugging module




eX707, eX707G, eX710, eX710G, eX715, eX721

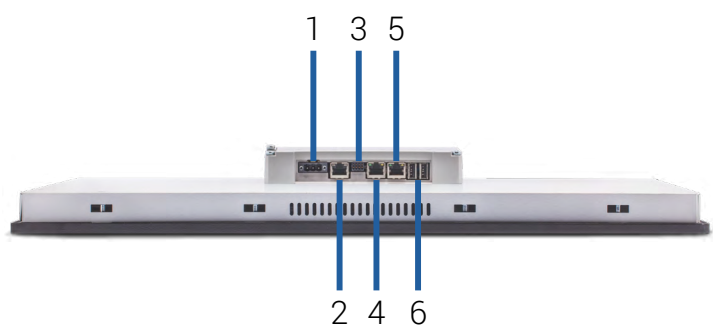

SIDE

- 1 Power Supply
- 2 Ethernet Port 0 (10/100/1000 Mb)
- 3 Serial Port
- 4 Ethernet Port 1 (10/100 Mb)
- 5 Ethernet Port 2 (10/100 Mb)
- 6 USB Port V2.0, max. 500mA (For maintenance only)

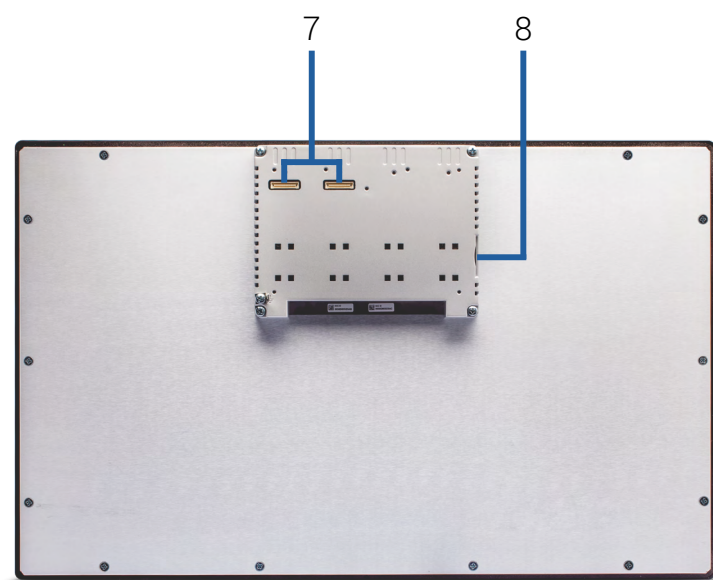

BACK SIDE

- 7 2x Expansion slot for Plugging module
- 8 SD Card slot



4.2 Technical data

System Resources	eX705	eX707	eX710
Display - Colors	5" TFT 16:9 LED - 64K	7" TFT 16:9 LED - 16M	10.1" TFT 16:9 LED - 16M
Resolution	800x480, WVGA	800x480, WVGA	1280x800, WVGA
Brightness	300 Cd/m2 typ.	500 Cd/m2 typ.	500 Cd/m2 typ.
Dimming	Yes	Yes	Yes
Touchscreen	True Glass Projected Capacitive, Multitouch	True Glass Projected Capacitive, Multitouch	True Glass Projected Capacitive, Multitouch
CPU	64-bit RISC quad core - 1.6GHz	64-bit RISC quad core - 1.6GHz	64-bit RISC quad core - 1.6GHz
Operating System	Linux	Linux	Linux
Flash Disk	4 GB (eMMC pSLC)	4 GB (eMMC pSLC)	4 GB (eMMC pSLC)
RAM	2 GB	2 GB	2 GB
FRAM	64 KB	64 KB	64 KB
Real Time Clock	Yes	Yes	Yes
Interface			
Ethernet Port	2 (port 0 - 10/100, port 1 - 10/100)	3 (port 0 - 10/100/1000, port 1 - 10/100, port 2 - 10/100)	3 (port 0 - 10/100/1000, port 1 - 10/100, port 2 - 10/100)
USB Port (*)	1 (Host V2.0, max. 500 mA)	2 (Host V2.0, max. 500 mA)	2 (Host V2.0, max. 500 mA)
Serial Port	1 (RS-232, RS-485, RS-422, software configurable) Max 2 serial ports using plug-in modules.	1 (RS-232, RS-485, RS-422, software configurable). Max 3 serial ports using plug-in modules.	1 (RS-232, RS-485, RS-422, software configurable). Max 3 serial ports using plug-in modules.
SD Card	Yes	Yes	Yes
Buzzer	Yes	Yes	Yes
Expansion	1 slot for plug in modules	2 slot for plug in modules	2 slot for plug in modules
Ratings			
Power Supply (**)	24 Vdc (10 to 32 Vdc)	24 Vdc (10 to 32 Vdc)	24 Vdc (10 to 32 Vdc)
Power Consumption	0.6 A Max. Class 2	0.7 A Max. Class 2	1.0 A Max. Class 2
Input Protection	Electronic	Electronic	Electronic
Battery	Rechargeable Lithium battery, not user-replaceable	Rechargeable Lithium battery, not user-replaceable	Rechargeable Lithium battery, not user-replaceable
Environment Conditions			
Operating Temperature	-20° to +60 °C (vertical installation). Plug-in and USB devices may limit max temperature to +50 °C	-20° to +60 °C (vertical installation). Plug-in and USB devices may limit max temperature to +50 °C	-20° to +60 °C (vertical installation). Plug-in and USB devices may limit max temperature to +50 °C
Storage Temperature	-20°C to +70°C	-20°C to +70°C	-20°C to +70°C
Operating / Storage Humidity	5-85% RH, non condensing	5-85% RH, non condensing	5-85% RH, non condensing
Conformal Coating	Yes, printed circuit boards	Yes, printed circuit boards	Yes, printed circuit boards
Protection Class	IP66 (front), IP20 (rear) - Type: 12, 4X	IP66 (front), IP20 (rear) - Type: 12, 4X	IP66 (front), IP20 (rear) - Type: 12, 4X
Dimensions and Weights			
Lenght	147x107 mm	187x147 mm	282x197 mm
Width	136x96 mm	176x136 mm	271x186 mm
Depth	52+8 mm	47+8 mm	56+8 mm
Weight	0.8 Kg	1.1 Kg	1.7 Kg

* for maintenance only

** For applications requiring compliance with EN 61131-2 and specifically in reference to 10 ms voltage dips (according to EN 61000-4-29), the lower power supply voltage limit is 19.2 Vdc.

*** not UL evaluated



System Resources	eX712	eX715	eX721
Display - Colors	12.3" TFT LED - 16M	15.6" TFT LED - 16M	21.5" TFT 16:9 LED - 16M
Resolution	1920x720, HD	1366x768, HD	1920x1080, full HD
Brightness	600 Cd/m2 typ.	400 Cd/m2 typ.	300 Cd/m2 typ.
Dimming	Yes	Yes	Yes
Touchscreen	True Glass Projected Capacitive, Multitouch	True Glass Projected Capacitive, Multitouch	True Glass Projected Capacitive, Multitouch
CPU	64-bit RISC quad core - 1.6GHz	64-bit RISC quad core - 1.6GHz	64-bit RISC quad core - 1.6GHz
Operating System	Linux	Linux	Linux
Flash Disk	4 GB (eMMC pSLC)	4 GB (eMMC pSLC)	4 GB (eMMC pSLC)
RAM	2 GB	2 GB	2 GB
FRAM	64 KB	64 KB	64 KB
Real Time Clock	Yes	Yes	Yes
Interface			
Ethernet Port	3 (port 0 - 10/100/1000, port 1 - 10/100, port 2 - 10/100)	3 (port 0 - 10/100/1000, port 1 - 10/100, port 2 - 10/100)	3 (port 0 - 10/100/1000, port 1 - 10/100, port 2 - 10/100)
USB Port (*)	2 (Host V2.0, max. 500 mA)	2 (Host V2.0, max. 500 mA)	2 (Host V2.0, max. 500 mA)
Serial Port	1 (RS-232, RS-485, RS-422, software configurable). Max 3 serial ports using plug-in modules.	1 (RS-232, RS-485, RS-422, software configurable). Max 3 serial ports using plug-in modules.	1 (RS-232, RS-485, RS-422, software configurable). Max 3 serial ports using plug-in modules.
SD Card	Yes	Yes	Yes
Buzzer	Yes	Yes	Yes
Expansion	2 slot for plug in modules	2 slot for plug in modules	2 slot for plug in modules
Ratings			
Power Supply (**)	24 Vdc (10 to 32 Vdc)	24 Vdc (10 to 32 Vdc)	24 Vdc (10 to 32 Vdc)
Power Consumption	1.1 A Max. Class 2	1.2 A Max. Class 2	1.7 A Max. Class 2
Input Protection	Electronic	Electronic	Electronic
Battery	Rechargeable Lithium battery, not user-replaceable	Rechargeable Lithium battery, not user-replaceable	Rechargeable Lithium battery, not user-replaceable
Environment Conditions			
Operating Temperature	-20° to +60 °C (vertical installation). Plug-in and USB devices may limit max temperature to +50 °C	-20° to +60 °C (vertical installation). Plug-in and USB devices may limit max temperature to +50 °C	-20° to +60 °C (vertical installation). Plug-in and USB devices may limit max temperature to +50 °C
Storage Temperature	-20°C to +70°C	-20°C to +70°C	-20°C to +70°C
Operating / Storage Humidity	5-85% RH, non condensing	5-85% RH, non condensing	5-85% RH, non condensing
Conformal Coating	Yes, printed circuit boards	Yes, printed circuit boards	Yes, printed circuit boards
Protection Class	IP66 (front), IP20 (rear) - Type: 12, 4X	IP66 (front), IP20 (rear) - Type: 12, 4X	IP66 (front), IP20 (rear) - Type: 12, 4X
Dimensions and Weights			
Length	344.5x163 mm	422x267 mm	552x347 mm
Width	332.5x152 mm	411x256 mm	541x336 mm
Depth	49+8.5 mm	56+8 mm	56+8 mm
Weight	1.8 Kg	4.1 Kg	6.1 Kg

* for maintenance only

** For applications requiring compliance with EN 61131-2 and specifically in reference to 10 ms voltage dips (according to EN 61000-4-29), the lower power supply voltage limit is 19.2 Vdc.

*** not UL evaluated



System Resources		eX707G	eX710G
Display - Colors		High-brightness 7" TFT 16:9 LED - 16M	High-brightness 10.1" TFT 16:9 LED - 16M
Resolution		800x480, WVGA	1280x800, WVGA
Brightness		600 Cd/m2 typ.	800 Cd/m2 typ.
Dimming		Yes	Yes
Touchscreen		True Glass Projected Capacitive, Multi-touch	True Glass Projected Capacitive, Multi-touch
CPU		32-bit RISC dual core - 800 MHz	32-bit RISC dual core - 800 MHz
Operating System		Linux	Linux
Flash Disk		4 GB	4 GB
RAM		1 GB	1 GB
FRAM		64 KB	64 KB
Real Time Clock		Yes	Yes
Interface			
Ethernet Port		3 (port 0 - 10/100/1000, port 1 - 10/100, port 2 - 10/100)	3 (port 0 - 10/100/1000, port 1 - 10/100, port 2 - 10/100)
USB Port (*)		2 (Host V2.0, max. 500 mA)	2 (Host V2.0, max. 500 mA)
Serial Port		1 (RS-232, RS-485, RS-422, software configurable). Max 3 serial ports using plug-in modules.	1 (RS-232, RS-485, RS-422, software configurable). Max 3 serial ports using plug-in modules.
SD Card		Yes	Yes
Buzzer		Yes	Yes
Expansion		2 slot for plug in modules	2 slot for plug in modules
Ratings			
Power Supply (**)		24 Vdc (10 to 32 Vdc)	24 Vdc (10 to 32 Vdc)
Power Consumption		0.7 A Max. Class 2	1.0 A Max. Class 2
Input Protection		Electronic	Electronic
Battery		Rechargeable Lithium battery, not user-replaceable	Rechargeable Lithium battery, not user-replaceable
Environment Conditions			
Operating Temperature		-20° to +60 °C (vertical installation). Plug-in and USB devices may limit max temperature to +50 °C	-20° to +60 °C (vertical installation). Plug-in and USB devices may limit max temperature to +50 °C
Storage Temperature		-20°C to +70°C	-20°C to +70°C
Operating / Storage Humidity		5-85% RH, non condensing	5-85% RH, non condensing
Conformal Coating		Yes, printed circuit boards	Yes, printed circuit boards
Protection Class		IP66 (front), IP20 (rear) - Type: 12, 4X	IP66 (front), IP20 (rear) - Type: 12, 4X
Dimensions and Weights			
Lenght		187x147 mm	282x197 mm
Width		176x136 mm	271x186 mm
Depth		47+8 mm	56+8 mm
Weight		1.5 Kg	2.5 Kg




* for maintenance only

** For applications requiring compliance with EN 61131-2 and specifically in reference to 10 ms voltage dips (according to EN 61000-4-29), the lower power supply voltage limit is 19.2 Vdc.


*** not UL evaluated



4.3 Mechanical dimensions

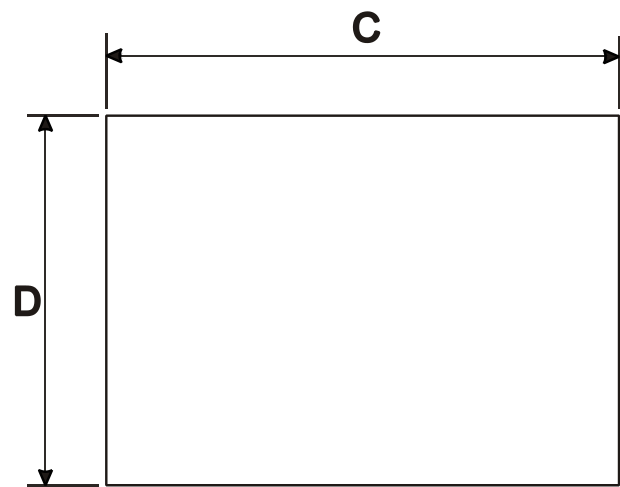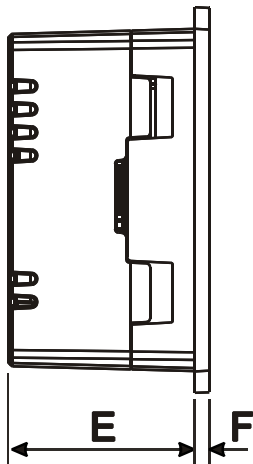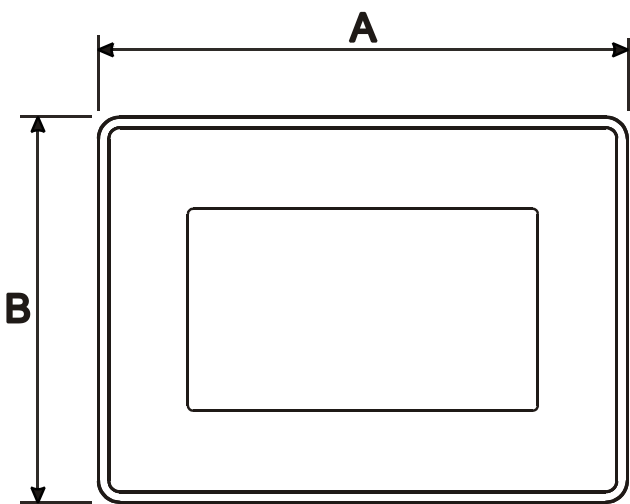

Model	A	B	C	D	E	F
eX705	147mm/5.78"	107mm/4.21"	136mm/5.35"	96mm/3.78"	56mm/2.40"	8mm/0.31"

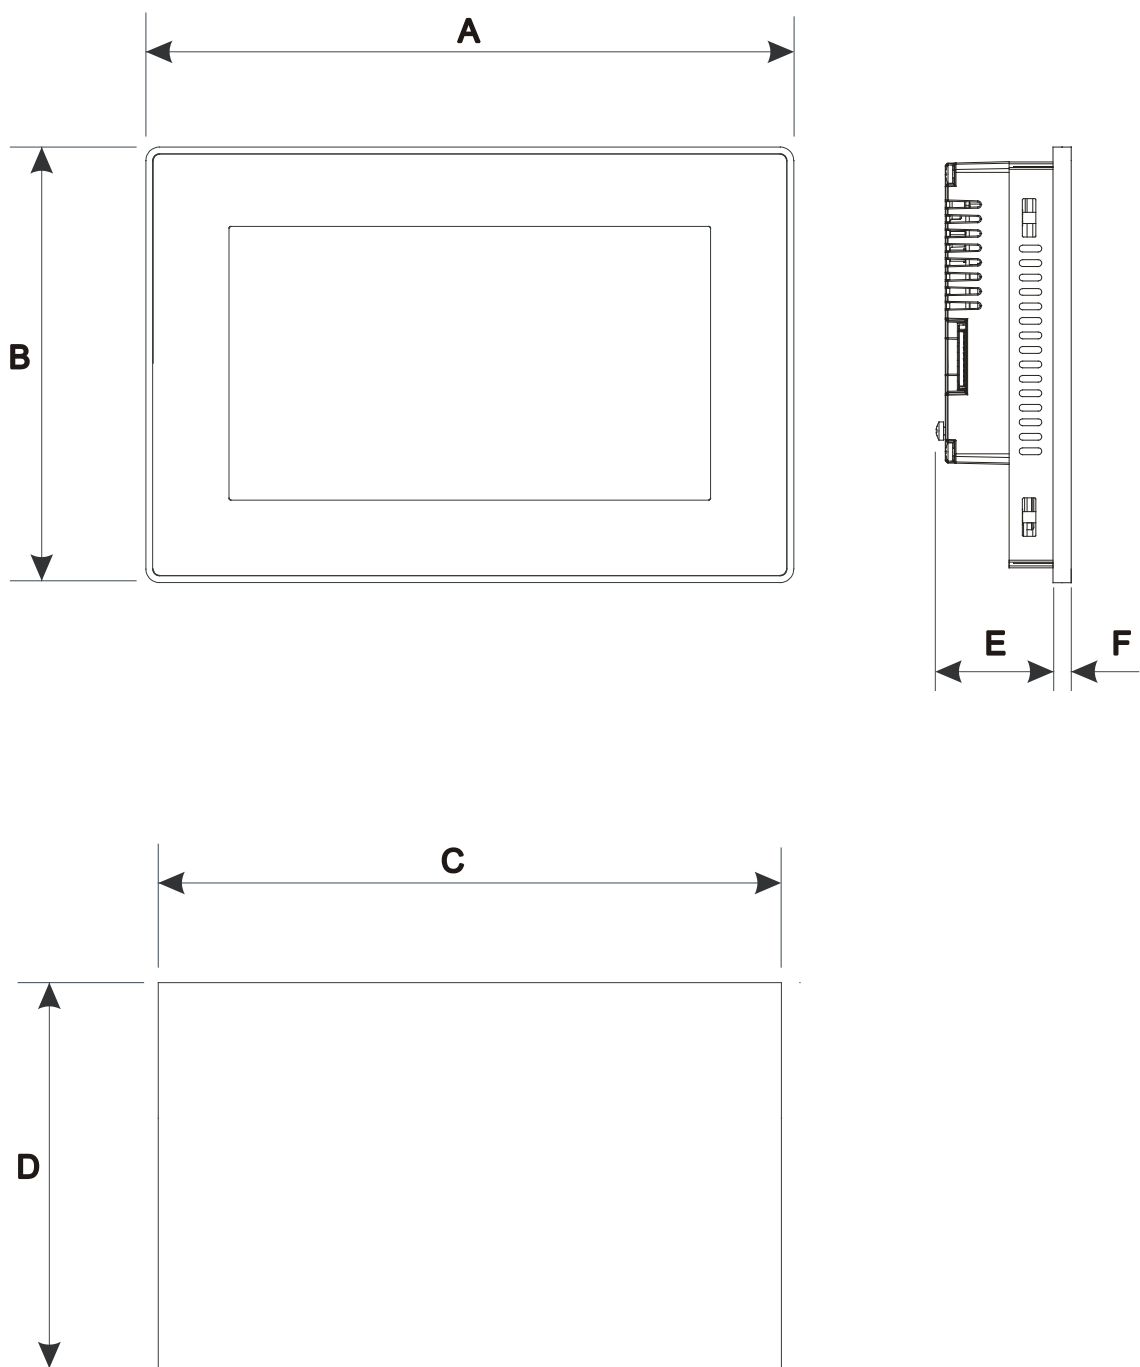

Model	A	B	C	D	E	F
eX707	187mm/7.36"	147mm/5.79"	176mm/6.90"	136mm/5.35"	47mm/1.85"	8mm/0.31"
eX707G	187mm/7.36"	147mm/5.79"	176mm/6.90"	136mm/5.35"	47mm/1.85"	8mm/0.31"
eX710	282mm/11.10"	197mm/7.80"	271mm/10.67"	186mm/7.32"	56mm/2.20"	8mm/0.31"
eX710G	282mm/11.10"	197mm/7.80"	271mm/10.67"	186mm/7.32"	56mm/2.20"	8mm/0.31"
eX712	344,5mm/13.56"	163mm/6.41"	332,5mm/13,09"	163mm/6,41"	49mm/1,92"	8mm/0.31"
eX715	422mm/16.60"	267mm/10.50"	411mm/16.18"	256mm/10.00"	56mm/2.20"	8mm/0.31"
eX721	552mm/21.73"	347mm/13.66"	541mm/21.30"	336mm/13.22"	56mm/2.20"	8mm/0.31"



5 Optional plugin module identification

Note: the PLCM01 label is used as an example for PLCM01, PLCM09X, PLI003



product model name	PLCM01
product part number	PLCM01U0P1
year/week of production	250
serial number	AA0000XXX123456789AA
version id of the product	0000000000000000
manufacturer address	Exor International S.p.A. Via Monte Fiorino 9-13 IT-37057 San Giovanni Lupatoto (VR)



Below you can find relation between modules ATEX and IECEx certified and max number of modules that can be used into eX700M series panels, based on their Interface Type:

Module	Application	Max Modules	Interface Type	Bus Extension connector
PLCM01	CAN	1 for eX705 2 for other panels	CAN	Y
PLCM01-NE	CAN	1 for eX705 2 for other panels	CAN	N
PLCM09X	3G modem	1	-	Y
PLIO03	Multifunction I/O	1	SPI	N

PLCM01 / PLCM01-NE: Operating temperature -20°C to 60°C

PLCM09X: Operating temperature -20°C to 60°C

PLIO03: with part number PLIO03xxxxY where:
- Y≤2 is operating temperature range 0°C≤Tamb≤+50°C with Operating Temperature Code T5 (vertical installation), 12-30VDC
- Y>2 is operating temperature range -20°C≤Tamb≤+60°C with Operating Temperature Code T4 (vertical installation), 12-30VDC



Note the above different "Operating Temperature Code" for different part number of PLIO03 module.

PLCM and PLIO03 electrical ratings:

- PLCM01: For electrical rating refers to the host eX700 models.
- PLCM09X: 2xDigital Inputs voltage 12÷30 Vdc, 3mA; 2xDigital Outputs voltage 12÷30 Vdc, 0.5A
- PLIO03: 20xDigital Inputs voltage 12÷30 Vdc; 12xDigital Outputs voltage 12÷30 Vdc, 0.5A; 4xAnalog inputs 0÷10 Vdc, 4-20mA; 4xAnalog outputs: 0÷10 Vdc, 4-20mA



Below you can find relation between modules and max number of modules that can be used into eX series 700M panels, based on their Interface Type:

Module	Application	Max Modules	Interface Type	Bus Extension connector
PLCM02	KNX	1	Serial	N
PLCM03	Serial RS232	2	Serial	Y
PLCM04	Serial RS485	2	Serial	Y
PLCM06	Profibus DP	1	SPI	N
PLCM10	4G wireless modem	1	-	Y
PLIO04	Multifunction I/O	1	SPI	N
PLIO06	Compact I/O	2	SPI	N
PLIO07	Compact I/O	2	SPI	N

Max modules refers to max number of modules can be plugged into the HMI (all slots).

If you are planning to use PLCM03 and PLCM04 (additional serial ports) you will obtain following "COM - Slot#" association:

- a module plugged in Slot#1 or into Slot#2 will be COM2,
- a module plugged in Slot#3 or into Slot#4 will be COM3.

If you are planning to use two PLCM01 (CAN interface) you will obtain following Slot# association:

- a module plugged in Slot#1 or into Slot#2 will be the CanPort 0,
- a module plugged in Slot#3 or into Slot#4 will be the CanPort 1.



6 Installation Guidelines

6.1 Installation Environment

Avoid prolonged exposition to direct sunlight to avoid the risk of overheating the device.

The equipment is not intended for installation in contact with corrosive chemical compounds. Check the resistance of the front panel to a specific compound before installation.


Do not use tools of any kind (screwdrivers, etc.) to operate the touch screen of the panel.

In order to meet the front panel protection classifications, proper installation procedure must be followed:

- the borders of the cutout must be flat
- screw up each fixing screw until the plastic bezel corner get in contact with the panel.
- the cutout for the panel must be of the dimensions indicated in this manual.

The IP66 is guaranteed only if:

- max deviation from the plane surface to the cut-out: ≤ 0.5 mm
- thickness of the case where is mounted the equipment: from 1,5 mm to 6 mm
- max surface roughness where the gasket is applied: ≤ 120 μ m

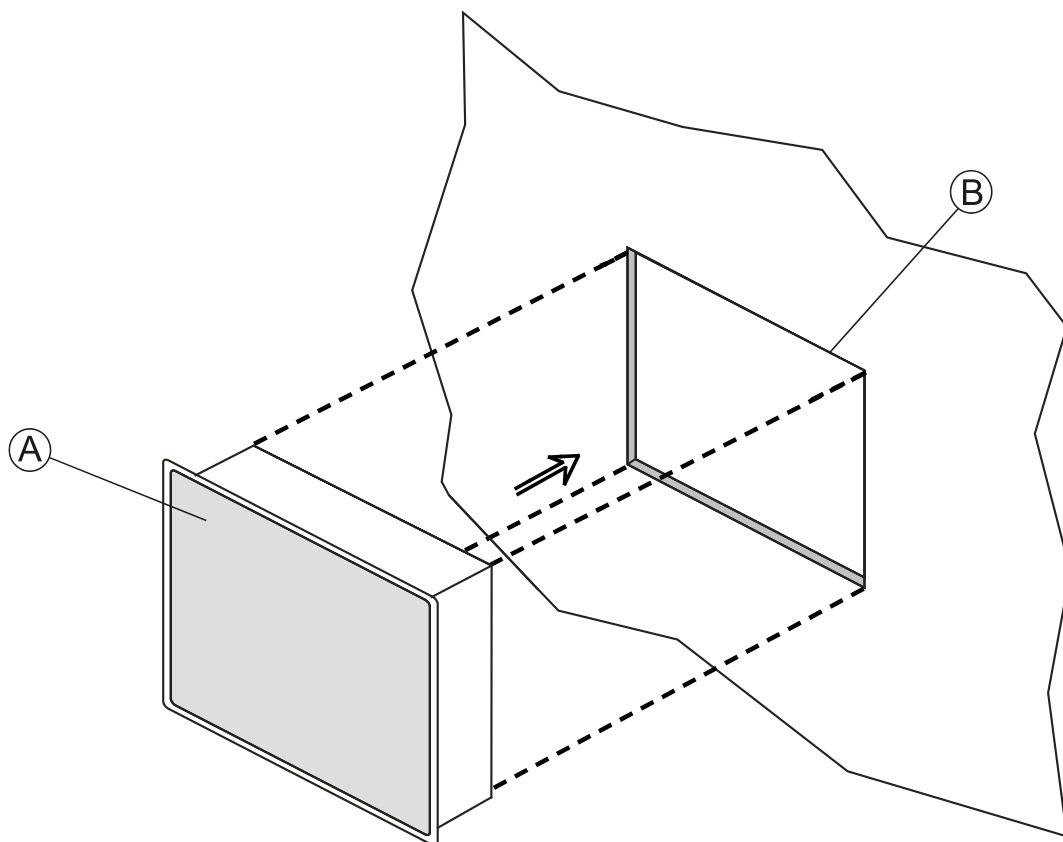

- A. HMI
B. Installation cut-out




6.2 Safety Instruction



For all installation notes, please refer to the Installation Guide provided with the product.

6.3 Installation Procedure

Place the fixing brackets contained in the fixing kit as shown in figure

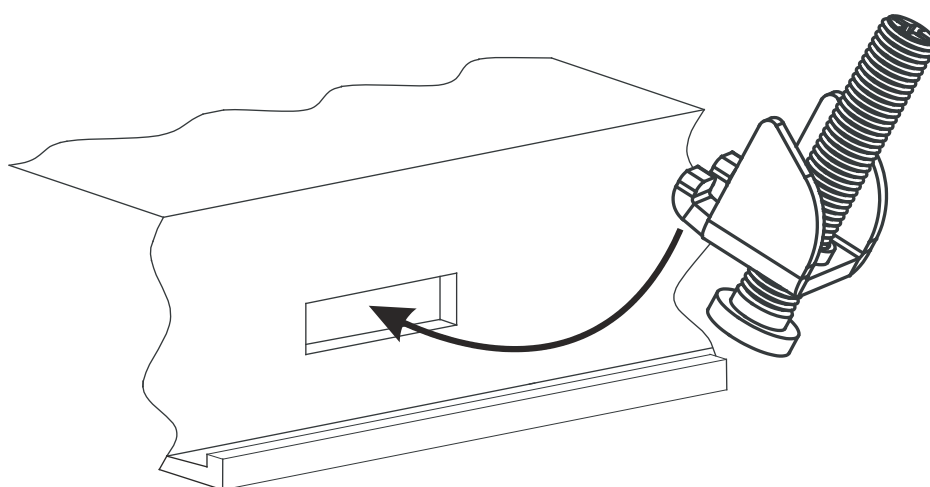


CAUTION!

Tightening torque: 130 Ncm or screw each fixing screw until the bezel corner gets in contact with the panel.



6.4 General Connection Diagram

6.4.1 Power Supply

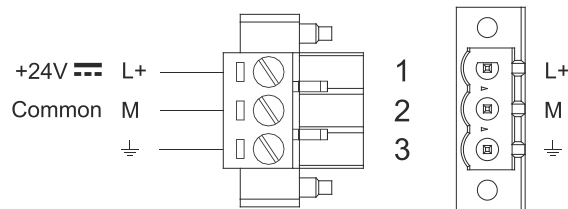

Pin	Description
1	+24V
2	0
3	↓


Connector technical characteristics:

- Compatible wire gauge and diameter range: IEC: 0.2 – 4 mm² / UL: AWG 26 - AWG 12
- Stripping length: 7 mm
- Compatible terminal types: DIN 46228-4, w. plastic collar ferrule min. 0.2 mm²/max. 2.5 mm²; DIN 46228-1, w. Wire and ferrule min. 0.2 mm²/max. 4 mm²
- Screw tightening torque: min. 0.4 Nm/max 0.5 Nm; screw flange min. 0.2 Nm/max 0.25 Nm
- Screwdriver blade size: 0.6 x 3.5 mm, PH1, PZ1
- Replacement terminal block part number: 1944340000 - Weidmüller



- Extra low voltage power supply / Limited power source.
- Do not open the cabinet while the system is powered up.
- Don't open the panel rear cover when the power supply is applied.
- Ensure that the power supply has enough power capacity for the operation of the equipment.

The unit must be grounded at all times via terminal 3 on the power terminal.

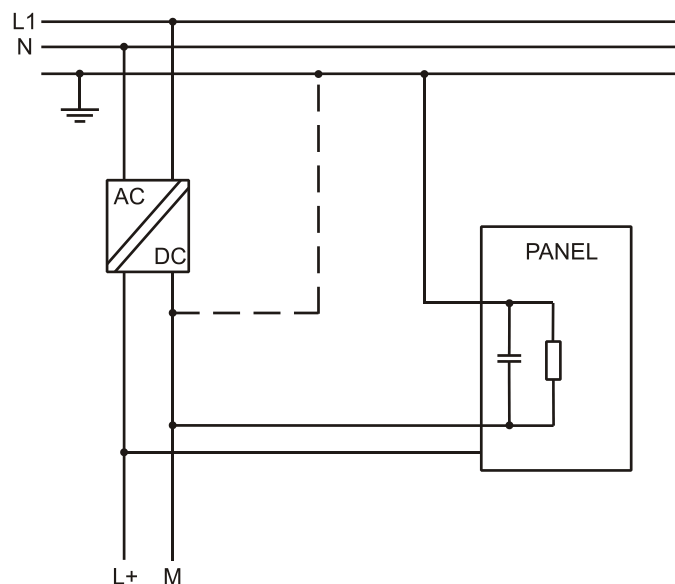




6.4.2 Serial Port

The serial port is used to communicate with the PLC or with another type of controller.
Different electrical standards are available for the signals in the PLC port connector: RS-232, RS-422, RS-485.

The serial port is software programmable. Make sure you select the appropriate interface in the programming software.



RS-232

Pin	Description
1	RX
2	TX
3	CTS
4	RTS
5	+5 V output
6	GND
7	-
8	SHIELD

RS-422 / RS-485*

Pin	Description
1	CHB-
2	CHA-
3	CHB+
4	CHA+
5	+5 V output
6	GND
7	-
8	SHIELD

* To operate in RS-485 pins 1-2 and 3-4 must be connected externally.

The communication cable must be chosen for the type of device being connected.


Connector technical characteristics:

- Compatible wire gauge and diameter range: IEC: 0.14 - 0.5 mm² / UL: AWG 24 - AWG 20
- Stripping length: 7 mm
- Compatible terminal types: DIN 46228-4, w. plastic collar ferrule min. 0.2 mm² / max. 2.5 mm²; DIN 46228-1, w. wire and ferrule min. 0.2 mm² / max. 4 mm²
- Replacement terminal block part number: 1715736 – Phoenix Contact



6.4.3 Ethernet Port


The Ethernet port have two LED indicators for status. Please see description below.

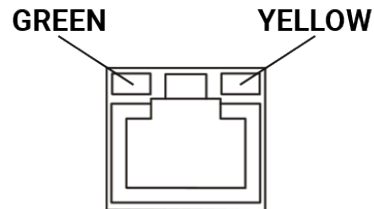

Green	Yellow	Description
ON	OFF	No LAN cable connected
Blink (Link Active)	ON	LAN cable connected with: ETH0: 1000 Mbit/s link ETH1/2: 100 Mbit/s link eX705: 100 Mbit/s link
Blink (Link Active)	OFF	LAN cable connected with: ETH0: 10/100 Mbit/s link ETH1/2: 10 Mbit/s link eX705: 10 Mbit/s link

6.4.4 Optional plugin module

eX700M series have several optional plugin module, multiple modules configurations are possible.

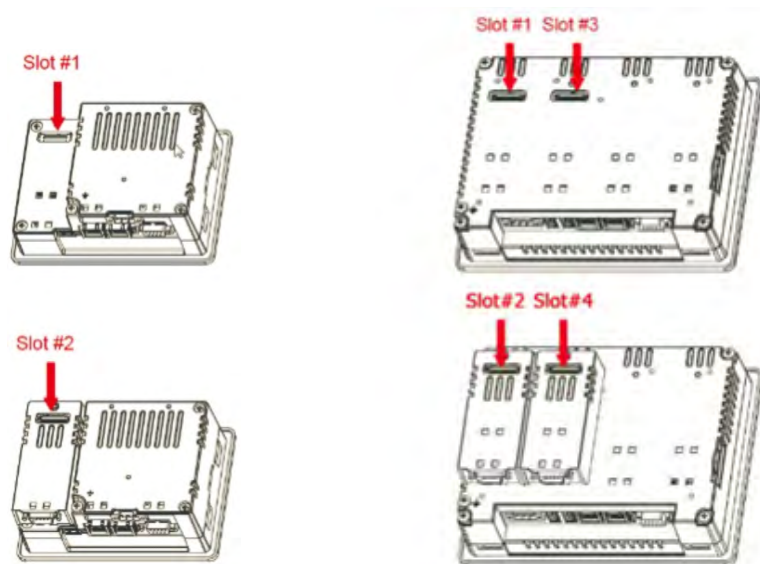

Slot#2 and Slot#4 are available only if plugin module has the “bus extension connector”.


Each slot carries three communication channels:

- 1 serial interface
- 1 CAN interface
- 1 SPI interface
- 1 2G/3G interface

Note: It is not possible to stack two modules that are using the same type of interface.



6.4.5 Optional plugin module installation procedure

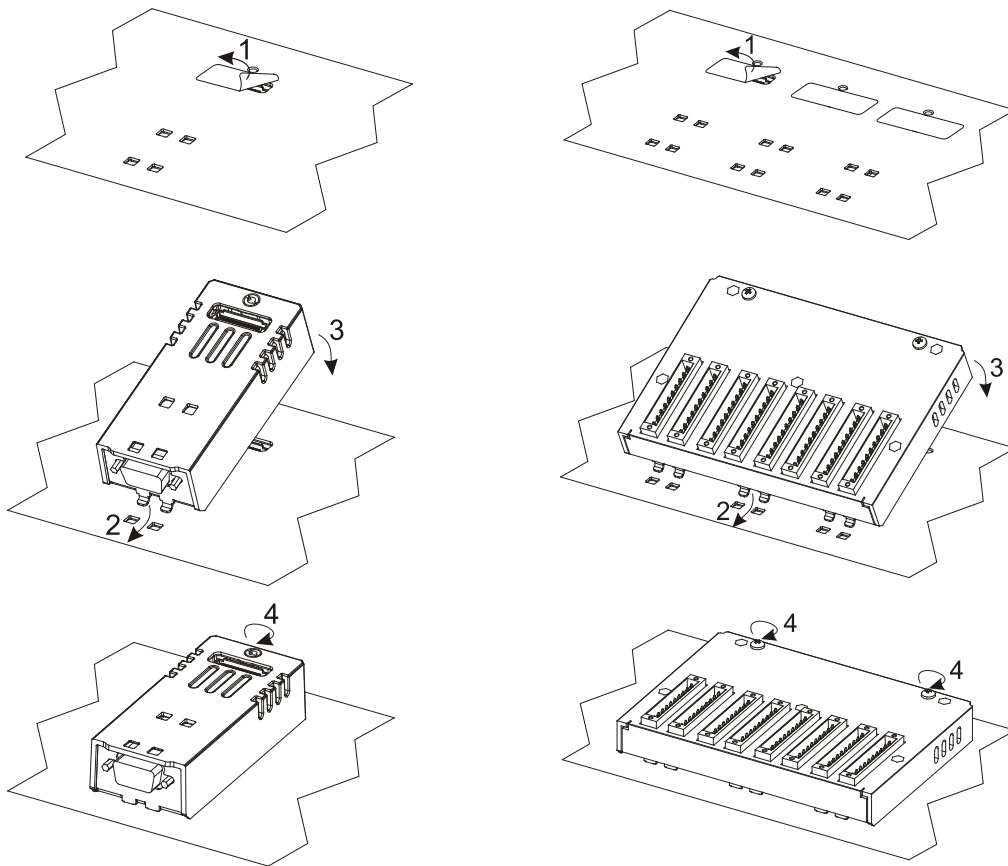



7 Battery

These devices are equipped with rechargeable Lithium battery, not user-replaceable.


The following information is maintained by the battery:

- hardware real-time clock (date and time)

Charge:

At first installation must be charged for 48 hours.

When the battery is fully charged, it ensures a period of 3 months of data back-up at 25°C.

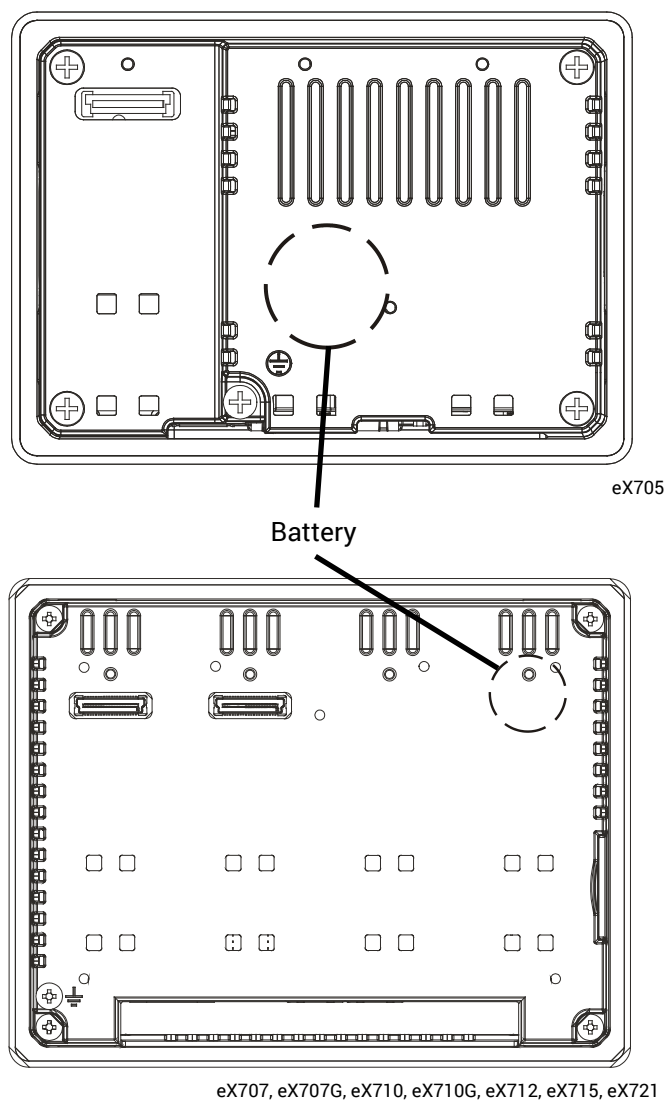

Note the above different "Operating Temperature Code" for different part number of PLIO03 module.



This device cannot be disposed of as a domestic waste but according to WEEE European Directive 2012/19/EU





8 Special Instruction for Use

- The equipment shall only be used in an area of not more than pollution degree 2, as defined in IEC/EN 60664-1.
- The equipment shall be installed in an enclosure that provides a degree of protection not less than IP 54 in accordance with IEC/EN 60079-15.
- Transient protection shall be provided that is set at a level not exceeding 140 % of the peak rated voltage value at the supply terminals to the equipment.
- Install the HMI device according to the accompanying installation instructions.
- Ground the HMI device according to the accompanying installation instructions.
- Only qualified personnel may install the HMI device or repair it.
- Ensure that the ventilation holes are not covered.
- Care shall be taken not to allow layers of dust to form on the graphic panel in a way that might cause the accumulation of static charges. Keep the faceplate of the HMI device clean: the equipment must be cleaned only with a soft cloth and neutral soap product. Do not use solvents.
- This device should not be used for purposes and methods other than indicated in this document and in the documentation accompanying the product.

9 Getting Started

eX Series 700M HMI products delivery configuration is based on a loader. Use the services of the loader to install applications on the device such as JMobile runtime or browsers.

JMobile Studio version V4.5 or higher is required. JMobile Studio is a software tool that must be properly installed on a computer running Microsoft Windows.

There are two options to transfer a JMobile application project to a HMI device:

Ethernet	Connect the HMI device to the computer with an Ethernet network. In JMobile Studio select the command Run/Download to target. You may have to ensure that the proper firewall policy has been configured in the computer to allow JMobile Studio to access the network.
USB	Create an Update Package using JMobile Studio and copy it to a USB Flash drive.

Updated product documentation is available at www.exorint.com.

For the products described in this manual please check:

Systems Settings User Manual




JMobile Studio User Manual

Web Browser User Manual



10 Environmentally-friendly disposal

All components related to the eX700M e eX700M Web series are designed to respect the environment and minimize pollution impact as much as possible. It is important to specify how to dispose of the different components of the system in order to have an eco-friendly recycling process.


Component	Disposal	Material Code	Disposal Method
		-	This devices cannot be disposed of as a domestic waste but according to WEEE European Directive 2012/19
		PAP20	Paper recycling
		C/PAP81	Separate collection (composite materials)
		PAP22	Paper recycling
		LDPE4	Plastic recycling
		PET1	Plastic recycling

Please dispose of packaging and components according to local recycling and waste disposal regulations.




11 Unpacking and Packing Instructions

- Unpacking eX705, eX707, eX707G, eX710, eX710G, eX712

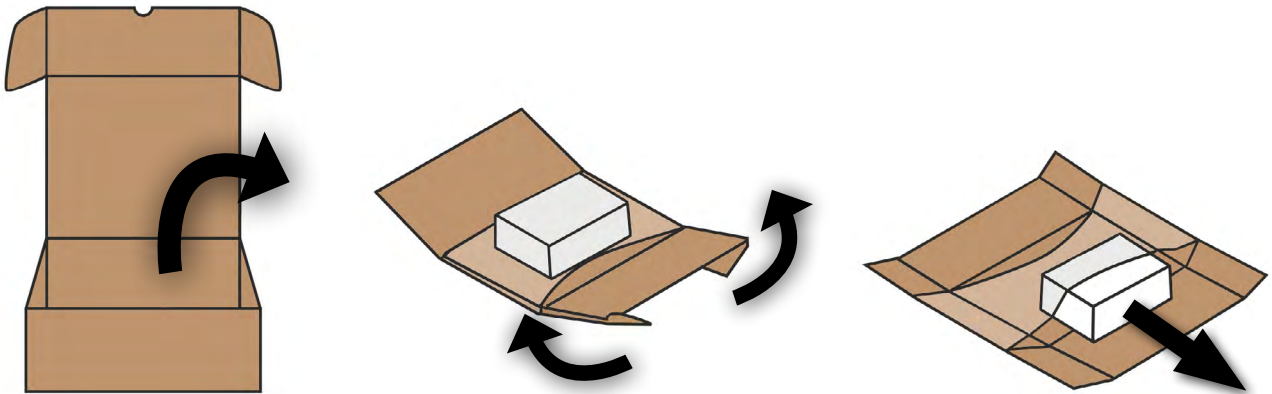

- Unpacking eX715, eX721

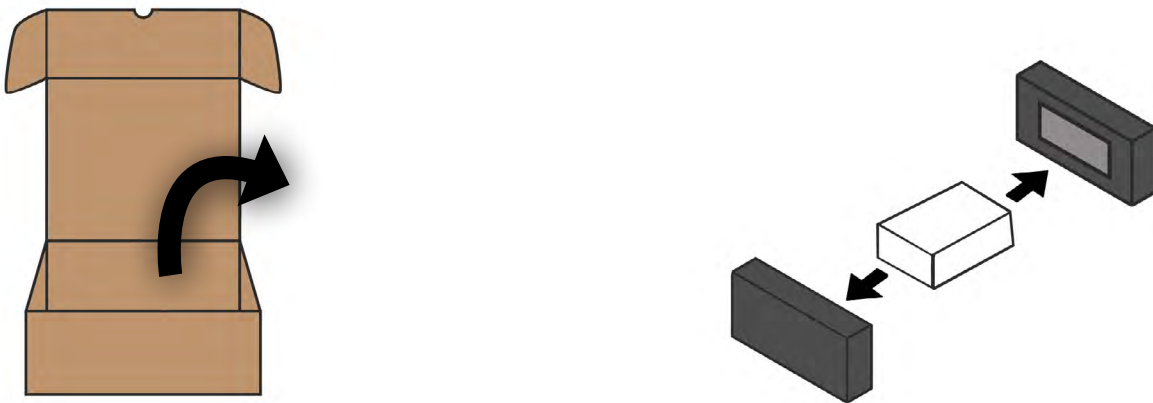

- To repack the units, please follow the instructions backwards.



Technology powered by **X Platform**



The all-in-one platform
for industrial automation

HARDWARE



EXOR

SOFTWARE



JMobile®

IoT PLATFORM



COXVINA