

1. 外观与尺寸：参考附图

Appearance & Dimensions: Refer To The Apprarance Drawing

2. 额定/Rated

项目/Items	规格/Specification	条件/Conditions
额定阻抗/Rated Impeance	4/8Ohm±20%	at 1kHz 100 mV
额定输入功率/Rated input power	1/1.5/2/3W	
最大输入功率/Max inut power	3.2W	
最低共振频率 /Resonant Frequency	800±20% Hz	1V Input
灵敏度/Sound pressure level	111±3dB	SPL at 1.05kHz in Average (0dB SPL=20μPa) Measuring condition: 0.5W (Sine wave) 0.1m measured with baffler shown in Figure4
有效频率范围 /Frequency response	FO~20KHz	
总谐波失真/THD	≤5% at 1kHz	

3. 动作检查/OPERATIONAL TEST

项目/ITEM	信号/SIGNAL	输入/INPUT	扫频范围/SWEEP RANGE
SWEEP TEST	Sine Wave	2W(3.5V)	200~5000Hz

- 在动作检查中不得有异常音出现
- Without Abnormal Sound In Operation Test.

4. 负荷实验/LOAD TEST

项目/ITEM	信号/SIGNA	I 输入/INPUT	驱动时间 DRIVNG TERM
Continuous load Test	PINK Noise/Jis Filter (Refer To Jis C5531)	2w(3.5V) (RMS)	96hours (with 5cc test box)

- 在负荷实验后不得有异常音出现,灵敏度应保持在限度范围内。
- Without Abnormal Sound After Test, And The S.P.L Shall Be In The Limit.
- 负荷实验应使用粉红噪声信号
- Runing Test Shall Use pry Noise Signaln

Name

MICRO SPEAKER

Customer's Part No:

Our Part No: **GSPK4020TN-1M8R1W**

5. 可靠性实验/Reliability Test

项目/Item	规格/Specification	判定/Judgement
高温放置实验 Hightemp.Storage Test	85℃±2℃/20~40%RH/96HR & 20℃±5℃,1H	实验完成后产品应满足上述第 1, 2, 3 项要求。 Clause 1, 2, 3 Shall be Satisfied After Test
低温放置实验 Lowtemp.Storage Test	-40±2℃/20~40%RH/96HR & 20℃±5℃,1H	
耐湿实验 Humidity Test	40℃±2℃/90~95%RH/96HR & 20℃±5℃, 1H	
耐高温负荷实验 Heatrunning Test	85℃±2℃/20~40%RH/-	
耐低温负荷实验 Coldrunning Test	-40℃±2℃/20~40%RH/-	
热冲击实验 Thermalshock Test	+85℃±2℃—30℃±2℃—+85℃±2℃ 5Cycles	
震动实验 Vibration Test	10Hz—40Hz—10Hz/60s, 1.0mm (X: 2H, Y: 2B)	

6. 跌落实验/SHOCK TEST

项目/Item	条件/Condition	判定/Judgement
Drop Test	产品在包装状态下,从 1 米高处向混凝土地面跌落:1 角:1 次:3 边:每条边 1 次:6 面:每 1 面 1 次 Speaker Shall Be Packed In The Carton And Dropped The Concrete Floor(H:1m)	实验完成后新产品应满足上述第 3 项要求 Clause 3 Shall be Satisfied After Test

Name

MICRO SPEAKER

Customer's Part No:

Our Part No: **GSPK4020TN-1M8R1W**

典型频响曲线 / TYPICAL FREQUENCY RESPONSE CURVE

12/21/2003 06:04

CRY6125Y 扬声器测试仪 V91

无框

滤波器1次

DCR= Ω 0 1000Hz灵敏度 : 111.02 dB

Ueq= dm3 $\rightarrow$ 0 平均灵敏度 : 105.74 dB

Dist.=010 cm F1= 10Hz F2=40000Hz

ACZ: Ω

Qm:

Zm: Ω

Qe:

F0: Hz

Qt:

型号:

0 dB 参考值为 : 20.0 μ Pa

扫频速度 : 002 ms 慢速

扫频模式 : 1/24 Oct

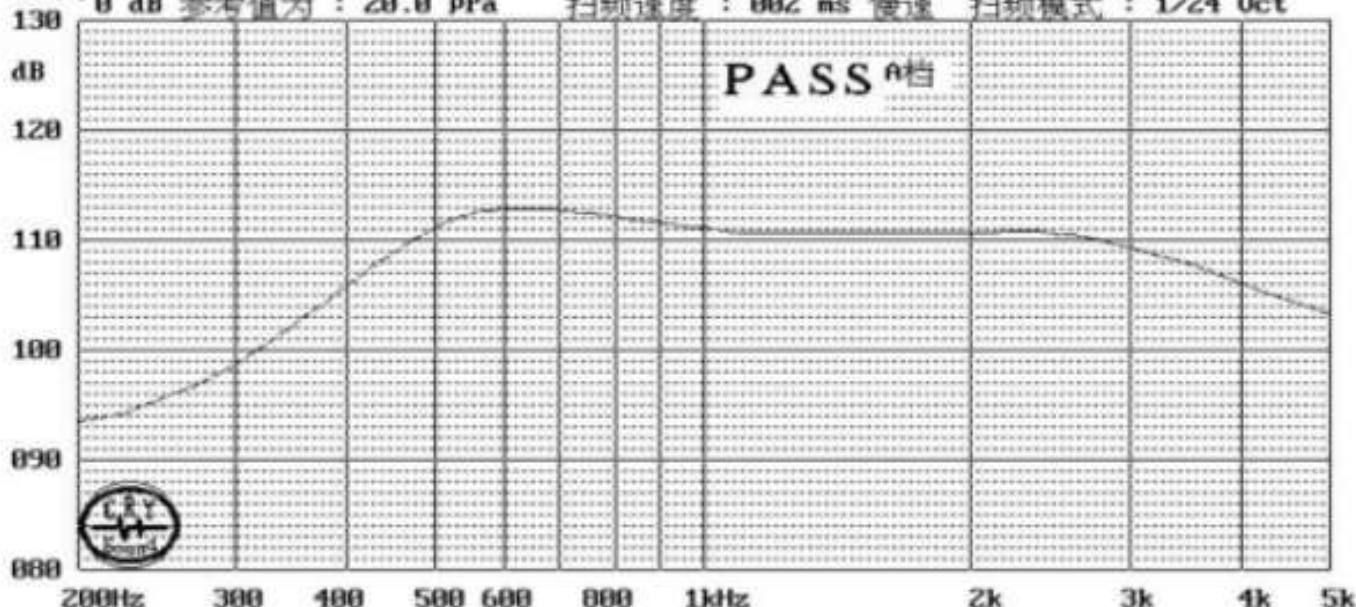


Figure 1

FREQUENCY MEASURING CIRCUIT AND EAR PIECE

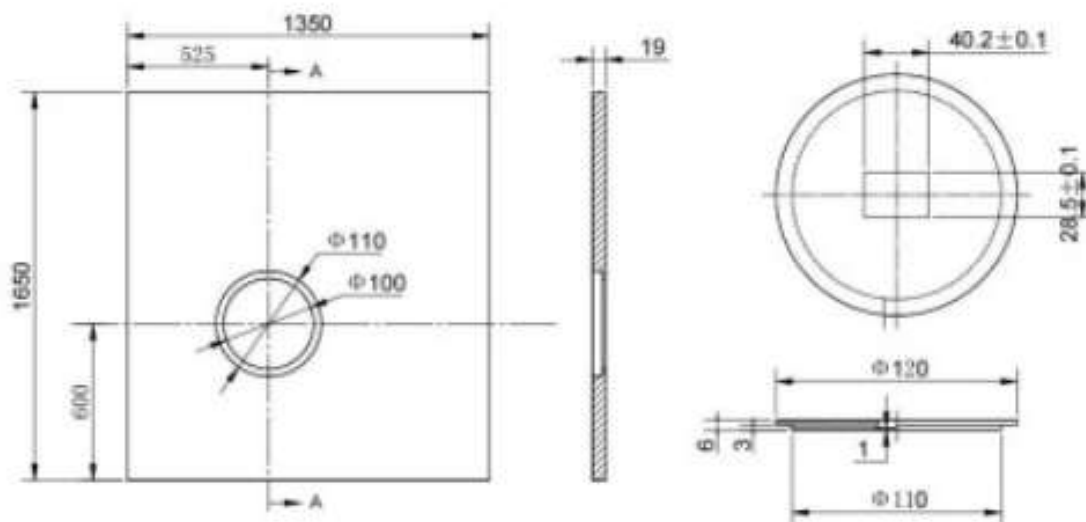


Figure 2




Name

MICRO SPEAKER

Customer's Part No:

Our Part No: **GSPK4020TN-1M8R1W**

■ 产品外观图/ DIMENSIONAL DRAWING

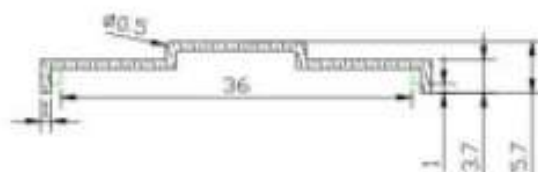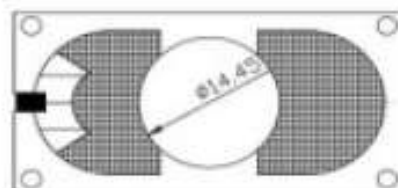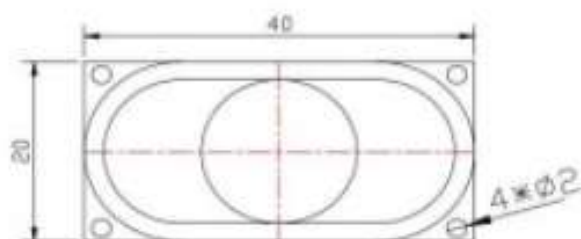

ITEM	DESCRIPTIONS	SPEC.	SUPPLIER	QTY	REMARK
1	Front foam ring	Adhesive		1	
2	Front cover	1Cr18Ni9		1	
3	Diaphragm	纸		1	
4	Voice coil	Self-bonding wire		1	
5	Inner pole shoe	08F ₂		1	
6	Magnet	Nd-Fe-B		1	
7	U YOKE	SPCE		1	
8	PCB	T0.3		1	
9	Lead wire			2	
10	Yoke assembly	PBT, black		1	
11	Insulator pad	Mylar		0	

Name

MICRO SPEAKER

Customer's Part No:

Our Part No: **GSPK4020TN-1M8R1W**

1. 范围/SCOPE

该规格书适用于移动电话等使用的扬声器单元。

This Specification Applies to The Speaker, Used In Mobilephone sec.

2. 型号/PART No

客户型号/Customer'S Part no:

3. 本公司型号/Our Part no : GSPK4020TN

4. 尺寸与重量/TYPE

40*20 电动式 40*20 Rectangle Dynamic type

5. 尺寸与重量/DIMENSION

尺寸: 参考外观图面 (Figure.3)

Dimension: Refer To The Appearance Drawing. (Figure.3)

重量: $\pm 0.1g$

Weight: $\pm 0.1g$

6. 标准测试条件/STANDARD TEST CONDITION

在没有其他特别指定时, 测试应如下所记的标准测试条件下进行。

Unless Otherwise Specified, The Test Shall Be Made Under The Standard Conditions.

- 温度/Temperature : $17^{\circ}\text{C} \sim 25^{\circ}\text{C}$ (Standard: 20.5°C)
- 相对湿度/Relative Humidity : $45\% \sim 85\%$ (Standare: 65%)
- 大气压力/Pressure : 86Kpa~106Kpa(Standard: 101.3 Kpa)

7. 使用与储存温度/OPERATION AND STORAGE TEMPERATURE

- 使用温度/Operation Temperature : $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- 储存温度/Storage Temperature : $-30^{\circ}\text{C} \sim 70^{\circ}\text{C}$

8. 电气特性规格/Electrical Specification

参考特性规格页面/Refer To The Appearance Page