

condensing
Units

R 134a
R 404A/R 507
R 22

 **Embraco aspera**



Index

	Page
R 134a - LBP	02
R 404A / R 507 - LBP	02
R 22 - LBP	04
R 134a - HBP	04
R 22 - M/HBP	06
R 404A / R 507 - MBP	06
External Views	08
Wiring Diagrams	13
Rotalock Valves	16
Nomenclature	17

Motor Type

Type	Description
RSIR	Resistive Start Inductive Run
RSCR	Resistive Start Capacitive Run
CSIR	Capacitive Start Inductive Run
CSR	Capacitive Start and Run
PSC	Permanent Split Capacitor
THREE PHASE	Start Connection

Expansion Device

Type	Description
C	Capillary
V	Expansion Valve

Warning All data is subject to change without notice. EMBRACO can accept no responsibility for possible errors contained in catalogues, brochures, technical bulletins and other printed material.

R 134a - LBP

MODEL	PARTIAL BILL OF MATERIALS	VOLTAGE / FREQUENCY	MOTOR TYPE	EXPANSIVE DEVICE	PERFORMANCE / EVAPORATING TEMPERATURE °C - **								RECEIVER CAPACITY dm ³ (l)	VALVES TUBE LINE O.D.		TUBE (no valves) TUBE LINE O.D.			
					-30	-25	RATED -23.3			-20	-15	-10		-5	SUCTION Inch	DISCHARGE Inch	SUCTION mm / Inch	DISCHARGE mm / Inch	PROCESS mm / Inch
					W	W	W	W Inp	RLA	W	W	W		W					
UNB1112Z	583FG	115V 60Hz (100V 50Hz)	RSIR	C	109	145	160	178	2.4	191	245	306	373	-	1/4	1/4	6 / 0.24	6 / 0.24	6 / 0.24
UNB1116Z	584SA	220-240V 50Hz	RSIR	C	136	178	195	182	1.2	233	293	365	436	0.6	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNB1116Z	584SG	115V 60Hz (100V 50Hz)	RSIR	C	159	208	229	211	3.1	272	343	427	510	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNB2116Z	584TA	220-240V 50Hz	CSIR	C-V	136	178	195	182	1.2	233	293	365	436	0.6	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNB2116Z	584TG	115V 60Hz (100V 50Hz)	CSIR	C-V	159	208	229	211	3.1	272	427	459	510	0.6	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNB1118Z	584UA	220-240V 50Hz	RSIR	C	171	222	244	185	1.3	291	372	463	560	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNB1118Z	584UG	115V 60Hz (100V 50Hz)	RSIR	C	200	259	286	222	3.1	341	435	542	656	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNB2118Z	584VA	220-240V 50Hz	CSIR	C-V	171	222	244	185	1.3	291	372	463	560	0.5	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE1121Z	572AA	220-240V 50Hz	RSIR	C	214	279	308	269	2.0	370	478	600	733	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE1121Z	572AG	115V 60Hz (100V 50Hz)	RSIR	C	250	327	360	296	4.4	436	559	702	857	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE2121Z	572BA	220-240V 50Hz	CSIR	C-V	214	279	308	269	2.0	370	478	600	733	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE2121Z	572BG	115V 60Hz (100V 50Hz)	CSIR	C-V	250	327	360	296	4.4	433	559	702	857	0.5	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE1130Z	572CA	220-240V 50Hz	RSIR	C	276	356	390	310	2.3	465	606	762	919	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE1130Z	572CG	115V 60Hz (100V 50Hz)	RSIR	C	322	416	456	350	5.3	544	709	891	1074	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE2130Z	572DA	220-240V 50Hz	CSIR	C-V	276	356	390	310	2.3	465	606	762	919	1.1	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE2130Z	572DG	115V 60Hz (100V 50Hz)	CSIR	C-V	322	416	456	350	5.3	544	709	891	1074	1.0	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UT2134Z	533BV	230V 50Hz	CSIR	C-V	302	395	433	400	3.2	512	657	824	988	0.6	3/8	1/4	8 / 0.31	6 / 0.24	8 / 0.31
UT2134Z	533BG	115V 60Hz (100V 50Hz)	CSIR	C-V	353	463	506	436	5.8	599	769	965	1157	0.5	3/8	1/4	8 / 0.31	6 / 0.24	8 / 0.31
UT1140Z	537AA	220-240V 50Hz	RSIR	C	393	512	560	462	3.5	674	866	1093	1337	-	3/8	1/4	8 / 0.31	6 / 0.24	8 / 0.31
UT2140Z	537BA	220-240V 50Hz	CSIR	C-V	393	512	560	462	3.5	674	866	1093	1337	1.1	3/8	1/4	8 / 0.31	6 / 0.24	8 / 0.31
UJ2152Z	564AA	220-240V 50Hz	CSR	C-V	453	593	657	540	3.6	797	1035	1302	1605	1.3	1/2	3/8	-	-	-

** Ambient 32°C (90°F) / Max. Subcooling 3°C (5°F) / Evaporator outlet and gas return 32°C (90°F).

R 404A / R 507 - LBP

MODEL	PARTIAL BILL OF MATERIALS	VOLTAGE / FREQUENCY	MOTOR TYPE	EXPANSIVE DEVICE	PERFORMANCE / EVAPORATING TEMPERATURE °C - **								RE-CEIVER CAPACITY dm ³ (l)	VALVES TUBE LINE O.D.		TUBE (no valves) TUBE LINE O.D.				
					-40	-35	-30	-25	RATED -23.3			-20		-15	-10	SUCTION Inch	DISCHARGE Inch	SUCTION mm / Inch	DISCHARGE mm / Inch	PROCESS mm / Inch
					W	W	W	W	W	W Inp	RLA	W		W	W					
UNE2125GK	671TA	220-240V 50Hz	CSIR	C-V	94	155	231	316	349	345	2.5	419	537	655	1.1	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE2125GK	671TD	208-230V 60Hz (200V 50Hz)	CSIR	C-V	110	181	271	370	408	400	6.3	490	629	766	1.0	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE2125GK	671TG	115V 60Hz (100V 50Hz)	CSIR	C-V	110	181	271	370	408	400	6.3	490	629	766	1.0	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE2134GK	673TA	220-240V 50Hz	CSIR	C-V	149	234	337	456	502	470	3.8	593	733	884	1.1	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE2134GK	673TD	208-230V 60Hz (200V 50Hz)	CSIR	C-V	174	273	394	534	587	545	7.1	694	857	1034	1.1	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE2134GK	673TG	115V 60Hz (100V 50Hz)	CSIR	C-V	174	273	394	534	587	545	7.1	694	857	1034	1.0	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UT2155GK	636CA	220-240V 50Hz	CSR	C-V	237	340	462	600	656	520	2.6	765	942	1123	1.2	3/8	1/4	8 / 0.31	6 / 0.24	9 / 0.35
UT2155GK-	636DG	115V 60Hz (100V 50Hz)	CSIR	C-V	251	343	481	669	667	609	7.8	905	1078	1369	1.3	3/8	1/4	-	-	-
UT2168GK	636JA	220-240V 50Hz	CSR	C-V	333	453	595	763	819	655	3.3	940	1142	1372	1.2	3/8	1/4	8 / 0.31	6 / 0.24	9 / 0.35
UT2168GK	636JG	115V 60Hz (100V 50Hz)	CSR	C-V	346	476	615	800	883	769	9.2	1007	1179	1337	1.0	3/8	1/4	-	-	-
UT2178GK	636QA	220-240V 50Hz	CSR	C-V	437	586	753	947	1023	770	3.9	1165	1410	1693	1.2	3/8	1/4	8 / 0.31	6 / 0.24	9 / 0.35
UT2178GK	636QG	115V 60Hz (100V 50Hz)	CSR	C-V	500	665	855	1070	1200	798	9.2	1323	1566	1933	1.2	3/8	1/2	-	-	-
UT2178GK	636QD	208-230V 60Hz (200V 50Hz)	RSIR	C-V	500	665	855	1070	1200	848	3.3	1323	1566	1933	1.2	3/8	1/4	-	-	-
UT2180GK	636XA	220-240V 50Hz	CSR	C-V	450	610	790	1000	1110	841	3.5	1240	1508	1873	1.2	3/8	1/4	-	-	-
UJ2192GK	664SA	220-240V 50Hz	CSR	C-V	453	612	795	1000	1081	905	4.9	1233	1488	1767	2.3	1/2	3/8	-	-	-
UJ2192GK	664SD	208-230V 60Hz (200V 50Hz)	CSR	C-V	530	715	930	1170	1265	1175	7.0	1442	1742	2067	2.3	1/2	3/8	-	-	-
UJ2192GS	668SM	380-420V 50Hz (440-480V 60Hz)	3 Ph	C-V	453	612	795	1000	1081	900	2.1	1233	1488	1767	2.3	1/2	3/8	-	-	-
UJ2212GK	663TA	220-240V 50Hz	CSR	C-V	616	886	1163	1479	1599	1175	6.1	1826	2198	2605	2.3	1/2	3/8	-	-	-
UJ2212GK	663TA	220-240V 50Hz	CSR	C-V	616	886	1163	1479	1599	1175	6.2	1826	2198	2605	2.3	5/8	3/8	-	-	-
UJ2212GK	663TD	208-230V 60Hz (200V 50Hz)	CSR	C-V	721	1037	1360	1730	1871	1370	7.1	2136	2571	3048	2.3	1/2	3/8	-	-	-
UJ2212GK	663TD	208-230V 60Hz	CSR	C-V	721	1037	1360	1730	1871	1370	7.7	2136	2571	3048	2.3	5/8	3/8	-	-	-
UJ2212GS	667TM	380-420V 50Hz (440-480V 60Hz)	3 Ph	C-V	616	886	1163	1479	1599	1479	2.3	1826	2198	2605	2.3	1/2	3/8	-	-	-

** Ambient 32°C (90°F) / Max. Subcooling 3°C (5°F) / Evaporator outlet and gas return 32°C (90°F).

	FAN			FAN MOTOR			WEIGHT (Only Reference) kg / lb	OVERALL DIMENSIONS - STANDARD				OVERALL DIMENSIONS - RESTYLING				CONDENSER		MODEL
	O.D. mm / Inch	No. & Angle of Blades	Air Flow Rate	Rated Output	Rated Input	Rated Input		A	B	C	DRAWING NUMBER	A	B	C	DRAWING NUMBER	No. OF ROWS	No. OF TUBES	
			m ³ (h)	W	W	A		mm / Inch	mm / Inch	mm / Inch	mm / Inch	mm / Inch	mm / Inch	mm / Inch				
	200 / 7.87	5/28°	240	9	34	0.58	12.6 / 27.8	390 / 15.35	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	1	8	UNB1112Z
	200 / 7.87	5/28°	240	10	38	0.23	15.9 / 35.0	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB1116Z
	200 / 7.87	5/28°	280	9	34	0.45	14.9 / 32.9	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB1116Z
	200 / 7.87	5/28°	240	10	38	0.23	15.2 / 33.5	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB2116Z
	200 / 7.87	5/28°	300	9	34	0.58	15.5 / 34.2	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB2116Z
	200 / 7.87	5/28°	240	10	38	0.23	15.3 / 33.7	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB1118Z
	200 / 7.87	5/28°	280	9	34	0.45	15.6 / 34.4	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB1118Z
	200 / 7.87	5/28°	245	10	36	0.25	15.7 / 34.6	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB2118Z
	200 / 7.87	5/28°	240	10	38	0.23	16.7 / 36.8	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	3	8	UNE1121Z
	200 / 7.87	5/28°	275	9	34	0.45	16.4 / 36.2	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	3	8	UNE1121Z
	200 / 7.87	5/28°	240	10	38	0.23	16.7 / 36.8	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	3	8	UNE2121Z
	200 / 7.87	5/28°	275	9	34	0.45	17.1 / 37.7	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	3	8	UNE2121Z
	230 / 9.06	5/28°	310	10	36	0.25	16.6 / 36.6	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE1130Z
	230 / 9.06	5/28°	355	9	34	0.45	17.0 / 37.5	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE1130Z
	230 / 9.06	5/28°	320	10	38	0.25	17.5 / 38.6	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE2130Z
	230 / 9.06	5/28°	355	9	34	0.45	17.8 / 39.2	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE2130Z
	230 / 9.06	5/28°	320	10	38	0.25	20.7 / 45.6	443 / 17.44	310 / 12.20	263 / 10.35	1955143	443 / 17.44	310 / 12.20	263 / 10.35	1955192	3	9	UT2134Z
	230 / 9.06	5/28°	370	9	34	0.45	20.3 / 44.8	443 / 17.44	310 / 12.20	263 / 10.35	1955143	443 / 17.44	310 / 12.20	263 / 10.35	1955192	3	9	UT2134Z
	254 / 10.00	5/28°	580	16	60	0.42	23.6 / 52.0	468 / 18.43	345 / 13.56	303 / 11.93	1955153	468 / 18.43	344.5 / 13.56	303 / 11.93	1955185	3	11	UT1140Z
	254 / 10.00	5/28°	580	16	65	0.42	28.5 / 62.8	468 / 18.43	345 / 13.56	303 / 11.93	1955153	468 / 18.43	344.5 / 13.56	303 / 11.93	1955185	3	11	UT2140Z
	254 / 10.00	5/28°	580	16	65	0.42	35.8 / 78.9	477 / 18.78	347 / 13.64	303 / 11.93	1955146	477 / 18.78	346.5 / 13.64	303 / 11.93	1955196	4	11	UJ2152Z

	FAN			FAN MOTOR			WEIGHT (Only Reference) kg / lb	OVERALL DIMENSIONS - STANDARD				OVERALL DIMENSIONS - RESTYLING				CONDENSER		MODEL
	O.D. mm / Inch	No. & Angle of Blades	Air Flow Rate	Rated Output	Rated Input	Rated Input		A	B	C	DRAWING NUMBER	A	B	C	DRAWING NUMBER	No. OF ROWS	No. OF TUBES	
			m ³ (h)	W	W	A		mm / Inch	mm / Inch	mm / Inch	mm / Inch	mm / Inch	mm / Inch	mm / Inch				
	230 / 9.06	5/28°	320	10	38	0.23	17.7 / 39.0	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE2125GK
	230 / 9.06	5/28°	370	9	34	0.45	17.9 / 39.5	440 / 17.32	300 / 11.81	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE2125GK
	230 / 9.06	5/28°	370	9	34	0.58	17.9 / 39.5	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE2125GK
	230 / 9.06	5/28°	320	16	65	0.42	23.0 / 50.7	468 / 18.43	345 / 13.58	303 / 11.93	1955174	480 / 18.90	300 / 11.81	291 / 11.46	1955191	3	11	UNE2134GK
	230 / 9.06	5/28°	370	16	34	0.50	23.0 / 50.7	468 / 18.43	345 / 13.58	303 / 11.93	1955174	480 / 18.90	300 / 11.81	291 / 11.46	1955191	3	11	UNE2134GK
	230 / 9.06	5/28°	370	16	34	0.74	17.9 / 39.5	468 / 18.43	345 / 13.58	303 / 11.93	1955174	480 / 18.90	300 / 11.81	291 / 11.46	1955191	3	11	UNE2134GK
	254 / 10.00	5/28°	580	16	65	0.42	28.0 / 61.7	477 / 18.78	353 / 13.90	303 / 11.93	1955145	465 / 18.31	340 / 13.39	296 / 11.65	1955193	4	11	UT2155GK
	254 / 10.00	5/28°	580	16	72	0.74	27.0 / 59.5	477 / 18.78	353 / 13.90	303 / 11.93	1955145	465 / 18.31	340 / 13.39	296 / 11.65	1955193	4	11	UT2155GK
	254 / 10.00	5/28°	580	16	65	0.42	29.0 / 63.9	477 / 18.78	353 / 13.90	303 / 11.93	1955145	465 / 18.31	340 / 13.39	296 / 11.65	1955193	4	11	UT2168GK
	254 / 10.00	5/28°	580	16	72	0.74	26.5 / 58.4	477 / 18.78	353 / 13.90	303 / 11.93	1955145	465 / 18.31	340 / 13.39	296 / 11.65	1955193	4	11	UT2168GK
	254 / 10.00	5/28°	580	16	65	0.42	28.5 / 62.8	477 / 18.78	353 / 13.90	303 / 11.93	1955145	465 / 18.31	340 / 13.39	296 / 11.65	1955193	4	11	UT2178GK
	275 / 10.83	5/28°	580	16	65	0.74	28.5 / 62.8	477 / 18.78	353 / 13.90	303 / 11.93	1955158	465 / 18.31	340 / 13.39	290 / 11.42	1955193	4	11	UT2178GK
	254 / 10.00	5/28°	580	16	65	0.50	28.5 / 62.8	477 / 18.78	353 / 13.90	303 / 11.93	1955145	477 / 18.78	353 / 13.90	290 / 11.42	1955193	4	11	UT2178GK
	254 / 10.00	5/28°	580	16	65	0.42	29.0 / 63.9	477 / 18.78	353 / 13.90	303 / 11.93	1955145	477 / 18.78	353 / 13.90	303 / 11.93	1955193	4	11	UT2180GK
	275 / 10.83	5/31°	600	34	95	0.75	36.2 / 79.8	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.14	324 / 12.76	1955186	3	12	UJ2192GK
	275 / 10.83	5/31°	980	25	110	0.75	36.2 / 79.8	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.14	324 / 12.76	1955186	3	12	UJ2192GK
	275 / 10.83	5/31°	850	25	110	0.49	43.2 / 95.2	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.14	324 / 12.76	1955186	3	12	UJ2192GS
	275 / 10.83	5/31°	600	34	95	0.75	37.0 / 81.5	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.14	324 / 12.76	1955186	4	12	UJ2212GK
	2x254/10.00	5/28°	1160	2x16	2x60	2x0.42	40.0 / 88.2	440 / 17.32	612 / 24.09	323 / 12.72	1955209	-	-	-	-	3	11	UJ2212GK
	275 / 10.83	5/31°	980	25	110	0.75	36.7 / 80.9	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.14	324 / 12.76	1955186	4	12	UJ2212GK
	2x254/10.00	5/28°	1160	2x16	2x58	2x0.36	40.0 / 88.2	440 / 17.32	612 / 24.09	323 / 12.72	1955209	-	-	-	-	3	11	UJ2212GK
	275 / 10.83	5/31°	850	25	110	0.49	34.7 / 76.5	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.14	324 / 12.76	1955186	4	12	UJ2212GS

R 22 - LBP

MODEL	PARTIAL BILL OF MATERIALS	VOLTAGE / FREQUENCY	MOTOR TYPE	EXPANSIVE DEVICE	PERFORMANCE / EVAPORATING TEMPERATURE °C - **									RECEIVER CAPACITY dm ³ (l)	VALVES TUBE LINE O.D.		TUBE (no valves) TUBE LINE O.D.		
					-30	-25	RATED -23.3			-20	-15	-10	SUCTION inch		DISCHARGE inch	SUCTION mm / inch	DISCHARGE mm / inch	PROCESS mm / inch	
					W	W	W	W Inp	RLA	W	W	W							
UNE2125E	6711A	220-240V 50Hz	CSIR	C-V	221	302	326	305	2.0	390	494	616	1.0	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE2134E	673AA	220-240V 50Hz	CSIR	C-V	314	407	442	413	2.7	512	634	767	1.1	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UT2140E	636AA	220-240V 50Hz	CSIR	C-V	401	500	541	552	3.7	628	767	930	1.2	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UT2140E	636AD	208-230V 60Hz (200V 50Hz)	CSIR	C-V	470	585	633	618	4.4	735	898	1088	1.2	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UT2155E	636BA	220-240V 50Hz	CSR	C-V	506	628	674	582	2.9	779	960	1198	1.2	3/8	1/4	8 / 0.31	6 / 0.24	9 / 0.35	
UT2168E	636KA	220-240V 50Hz	CSR	C-V	616	767	826	652	3.2	965	1233	1529	1.2	5/8	3/8	8 / 0.31	6 / 0.24	9 / 0.35	
UJ2178E	664GA	220-240V 50Hz	CSR	C-V	779	965	1052	840	4.1	1221	1547	1942	2.3	1/2	3/8	-	-	-	
UJ2190E	663NV	230V 50Hz	CSR	C-V	953	1186	1273	960	4.6	1459	1814	2250	2.3	1/2	3/8	-	-	-	

** Ambient 32°C (90°F) / Max. Subcooling 3°C (5°F) / Evaporator outlet and gas return 32°C (90°F).

R 134a - HBP

MODEL	PARTIAL BILL OF MATERIALS	VOLTAGE / FREQUENCY	MOTOR TYPE	EXPANSIVE DEVICE	PERFORMANCE / EVAPORATING TEMPERATURE °C - **										RECEIVER CAPACITY dm ³ (l)	VALVES TUBE LINE O.D.		TUBE (no valves) TUBE LINE O.D.		
					-15	-10	-5	0	5	RATED 7.2			10	SUCTION inch		DISCHARGE inch	SUCTION mm / inch	DISCHARGE mm / inch	PROCESS mm / inch	
					W	W	W	W	W	W	W Inp	RLA	W							
UNB5125Z	583AA	220-240V 50Hz	RSIR	C-V	148	183	222	270	320	342	179	1.1	372	-	1/4	1/4	6 / 0.24	6 / 0.24	6 / 0.24	
UNB5125Z	583AG	115V 60Hz (100V 50Hz)	RSIR	C	173	214	259	315	374	400	211	2.5	435	-	1/4	1/4	6 / 0.24	6 / 0.24	6 / 0.24	
UNB5128Z	583BA	220-240V 50Hz	RSIR	C	164	203	250	302	359	384	209	1.2	419	-	1/4	1/4	6 / 0.24	6 / 0.24	6 / 0.24	
UNB5128Z	583BG	115V 60Hz (100V 50Hz)	RSIR	C	192	238	293	353	421	449	244	2.9	490	-	1/4	1/4	6 / 0.24	6 / 0.24	6 / 0.24	
UNB5132Z	583CA	220-240V 50Hz	RSIR	C	186	233	285	347	413	442	229	1.3	483	-	1/4	1/4	6 / 0.24	6 / 0.24	6 / 0.24	
UNB5132Z	583CG	115V 60Hz (100V 50Hz)	RSIR	C	217	272	334	406	483	517	279	3.2	565	-	1/4	1/4	6 / 0.24	6 / 0.24	6 / 0.24	
UNB5144Z	584AA	220-240V 50Hz	RSIR	C	269	330	403	479	560	602	295	1.7	651	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNB5144Z	584AG	115V 60Hz (100V 50Hz)	RSIR	C	314	386	472	560	656	705	355	4.2	762	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNB6144Z	584BA	220-240V 50Hz	CSIR	C-V	269	330	403	479	560	602	295	1.7	651	0.6	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNB6144Z	584BG	115V 60Hz (100V 50Hz)	CSIR	C-V	314	386	472	560	656	705	355	4.2	762	0.5	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE5160Z	571AA	220-240V 50Hz	RSIR	C	320	392	480	570	669	716	380	2.4	779	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE5160Z	571AN	200-240V 50Hz (230V 60Hz)	RSIR	C	320	392	480	570	669	716	380	2.4	779	1.1	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE5160Z	571AG	115V 60Hz (100V 50Hz)	RSIR	C	374	458	562	666	783	838	455	5.1	912	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE6160Z	571BA	220-240V 50Hz	CSIR	C-V	320	392	480	570	669	716	380	2.4	779	1.1	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE6160Z	571BG	115V 60Hz (100V 50Hz)	CSIR	C-V	374	458	562	666	783	838	455	5.1	912	1.0	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE5170Z	571CA	220-240V 50Hz	RSIR	C	355	440	535	640	753	803	410	2.4	872	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE5170Z	571CG	115V 60Hz (100V 50Hz)	RSIR	C	415	514	626	749	881	940	490	5.5	1021	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE5187Z	571EA	220-240V 50Hz	RSIR	C	488	613	750	899	1052	1128	562	3.4	-	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE5187Z	571EG	115V 60Hz (100V 50Hz)	RSIR	C	571	717	878	1051	1231	1320	672	7.8	-	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE6170Z	571DA	220-240V 50Hz	CSIR	C-V	355	440	535	640	753	815	410	2.4	872	1.1	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE6170Z	572GN	200-240V 50Hz (230V 60Hz)	CSIR	C-V	355	440	535	640	753	815	330	5.1	872	1.1	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE6170Z	571DG	115V 60Hz (100V 50Hz)	CSIR	C-V	431	453	557	683	767	856	502	7.8	912	1.0	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE6187Z	571FA	220-240V 50Hz	CSIR	C-V	488	613	750	899	1052	1128	562	3.4	1221	1.1	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE6187Z	571FG	115V 60Hz (100V 50Hz)	CSIR	C-V	571	717	878	1051	1231	1320	672	7.8	1429	1.0	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE6187Z	571FN	200-240V 50Hz (230V 60Hz)	CSIR	C-V	482	600	738	894	1070	1153	562	6.3	1264	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE6210Z	572FG	115V 60Hz (100V 50Hz)	CSIR	C-V	442	582	750	946	1168	1275	586	8.7	1419	1.0	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UT5213Z	533CT	220-230V 50Hz	RSIR	C	651	817	994	1180	1381	1477	745	4.5	1601	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UT5213Z	533CG	115V 60Hz (100V 50Hz)	RSIR	C	762	957	1163	1381	1616	1728	892	10	1873	-	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UT6213Z	533DT	220-230V 50Hz	CSIR	C-V	651	817	994	1180	1381	1477	745	4.5	1601	1.1	3/8	1/4	8 / 0.31	6 / 0.24	9 / 0.35	
UT6213Z	533DG	115V 60Hz (100V 50Hz)	CSIR	C-V	762	957	1163	1381	1616	1728	892	10.3	1873	1.0	3/8	1/4	8 / 0.31	6 / 0.24	9 / 0.35	
UT6215Z	536ZC	220V 50Hz	CSIR	C-V	719	923	1128	1338	1570	1680	862	5.3	1808	1.2	1/2	3/8	8 / 0.31	6 / 0.24	9 / 0.35	
UT6215Z	536ZG	115V 60Hz (100V 50Hz)	CSIR	C-V	841	1080	1320	1566	1837	1966	1022	12.1	2115	1.2	1/2	3/8	8 / 0.31	6 / 0.24	9 / 0.35	

** Ambient 32°C (90°F) / Max. Subcooling 3°C (5°F) / Evaporator outlet and gas return 32°C (90°F).

	FAN			FAN MOTOR			WEIGHT (Only Reference) kg / lb	OVERALL DIMENSIONS - STANDARD				OVERALL DIMENSIONS - RESTYLING				CONDENSER		MODEL
	O.D. mm / inch	No. & Angle of Blades	Air Flow Rate	Rated Output	Rated Input	Rated Input		A	B	C	DRAWING NUMBER	A	B	C	DRAWING NUMBER	No. OF ROWS	No. OF TUBES	
			m³(h)	W	W	A		mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch			
	230 / 9.06	5/28°	320	10	38	0.25	17.7 / 39.0	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	310 / 12.20	254 / 10.00	1955191	3	9	UNE2125E
	230 / 9.06	5/28°	320	10	38	0.25	19.7 / 43.4	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE2134E
	254 / 10.00	5/28°	580	16	65	0.42	26.0 / 57.3	477 / 18.78	353 / 13.90	303 / 11.93	1955145	477 / 18.78	352.5 / 13.88	303 / 11.93	1955193	4	11	UT2140E
	254 / 10.00	5/28°	670	16	65	0.50	28.0 / 61.7	477 / 18.78	353 / 13.90	303 / 11.93	1955145	477 / 18.78	352.5 / 13.88	303 / 11.93	1955193	4	11	UT2140E
	254 / 10.00	5/28°	580	16	65	0.42	29.0 / 63.9	477 / 18.78	353 / 13.90	303 / 11.93	1955145	465 / 18.31	340 / 13.39	296 / 11.65	1955193	4	11	UT2155E
	254 / 10.00	5/28°	580	16	65	0.42	28.0 / 61.7	477 / 18.78	353 / 13.90	303 / 11.93	1955145	465 / 18.31	340 / 13.39	296 / 11.65	1955193	4	11	UT2168E
	275 / 10.83	5/31°	600	34	95	0.75	34.7 / 76.5	477 / 18.78	414 / 16.30	324 / 12.76	1955151	477 / 18.78	410 / 16.14	324 / 12.76	1955186	3	12	UJ2178E
	275 / 10.83	5/31°	600	34	95	0.75	38.0 / 83.8	477 / 18.78	414 / 16.30	324 / 12.76	1955151	477 / 18.78	410 / 16.14	324 / 12.76	1955186	3	12	UJ2190E

	FAN			FAN MOTOR			WEIGHT (Only Reference) kg / lb	OVERALL DIMENSIONS - STANDARD				OVERALL DIMENSIONS - RESTYLING				CONDENSER		MODEL
	O.D. mm / inch	No. & Angle of Blades	Air Flow Rate	Rated Output	Rated Input	Rated Input		A	B	C	DRAWING NUMBER	A	B	C	DRAWING NUMBER	No. OF ROWS	No. OF TUBES	
			m³(h)	W	W	A		mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch			
	200 / 7.87	5/28°	250	10	38	0.25	12.6 / 27.8	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB5125Z
	200 / 7.87	5/28°	280	9	34	0.45	12.7 / 28.0	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB5125Z
	200 / 7.87	5/28°	250	10	36	0.25	13.0 / 28.7	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB5128Z
	200 / 7.87	5/28°	280	9	34	0.45	13.2 / 29.1	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB5128Z
	200 / 7.87	5/28°	240	10	38	0.25	19.3 / 42.5	415 / 16.34	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB5132Z
	200 / 7.87	5/28°	240	9	40	0.58	13.2 / 29.1	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	2	8	UNB5132Z
	200 / 7.87	5/28°	240	10	38	0.25	16.4 / 36.1	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	3	8	UNB5144Z
	200 / 7.87	5/28°	300	9	40	0.58	15.0 / 33.1	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	3	8	UNB5144Z
	200 / 7.87	5/28°	240	10	38	0.25	16.6 / 36.6	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	3	8	UNB6144Z
	200 / 7.87	5/28°	290	9	34	0.45	16.0 / 35.3	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	3	8	UNB6144Z
	230 / 9.06	5/28°	320	10	38	0.25	15.5 / 34.2	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE5160Z
	230 / 9.06	5/28°	320	10	38	0.25	18.7 / 41.2	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE5160Z
	230 / 9.06	5/28°	390	9	40	0.58	15.7 / 34.6	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE5160Z
	230 / 9.06	5/28°	320	10	38	0.25	18.7 / 41.2	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE6160Z
	230 / 9.06	5/28°	390	9	34	0.45	16.7 / 36.8	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE6160Z
	230 / 9.06	5/28°	320	10	38	0.25	16.7 / 36.8	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE5170Z
	230 / 9.06	5/28°	390	9	40	0.58	16.2 / 35.7	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE5170Z
	230 / 9.06	5/28°	370	16	65	0.42	16.2 / 35.7	468 / 18.43	344.5 / 13.56	303 / 11.93	1955176	480 / 18.90	344.5 / 13.56	303 / 11.93	1955184	3	11	UNE5187Z
	230 / 9.06	5/28°	370	16	40	0.74	16.2 / 35.7	468 / 18.43	344.5 / 13.56	303 / 11.93	1955176	480 / 18.90	344.5 / 13.56	303 / 11.93	1955184	3	11	UNE5187Z
	230 / 9.06	5/28°	320	10	38	0.25	17.7 / 39.0	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE6170Z
	230 / 9.06	5/28°	320	10	38	0.25	17.0 / 37.5	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE6170Z
	254 / 10.00	5/28°	390	9	72	0.58	21.5 / 47.4	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNE6170Z
	254 / 10.00	5/28°	320	16	65	0.42	21.0 / 46.3	468 / 18.43	344.5 / 13.56	303 / 11.93	1955176	465 / 18.31	340 / 13.39	296 / 11.65	1955184	3	11	UNE6187Z
	254 / 10.00	5/28°	370	16	65	0.74	19.7 / 43.4	468 / 18.43	344.5 / 13.56	303 / 11.93	1955176	465 / 18.31	340 / 13.39	296 / 11.65	1955184	3	11	UNE6187Z
	254 / 10.00	5/28°	320	16	65	0.42	22.0 / 48.5	415 / 16.34	338 / 13.31	291 / 11.46	1955188	-	-	-	-	3	11	UNE6187Z
	254 / 10.00	5/28°	370	16	72	0.74	21.7 / 47.8	470 / 18.50	340 / 13.39	303 / 11.93	1955176	468 / 18.43	344.5 / 13.56	303 / 11.93	1955184	3	11	UNE6210Z
	254 / 10.00	5/28°	580	16	60	0.42	23.4 / 51.6	468 / 18.43	344.5 / 13.56	303 / 11.93	1955153	468 / 18.43	344.5 / 13.56	303 / 11.93	1955185	3	11	UT5213Z
	254 / 10.00	5/28°	670	16	58	0.74	23.6 / 52.0	468 / 18.43	344.5 / 13.56	303 / 11.93	1955153	468 / 18.43	344.5 / 13.56	303 / 11.93	1955185	3	11	UT5213Z
	254 / 10.00	5/28°	580	16	65	0.42	24.5 / 54.0	468 / 18.43	345 / 13.48	303 / 11.93	1955153	468 / 18.43	344.5 / 13.56	303 / 11.93	1955185	3	11	UT6213Z
	254 / 10.00	5/28°	580	16	72	0.74	23.5 / 51.8	468 / 18.43	345 / 13.48	303 / 11.93	1955153	468 / 18.43	344.5 / 13.56	303 / 11.93	1955185	3	11	UT6213Z
	254 / 10.00	5/28°	580	25	110	0.62	26.5 / 58.4	468 / 18.43	345 / 13.48	303 / 11.93	1955153	468 / 18.43	344.5 / 13.56	303 / 11.93	1955185	3	11	UT6215Z
	254 / 10.00	5/28°	670	25	110	1.10	26.0 / 57.3	468 / 18.43	345 / 13.48	303 / 11.93	1955153	468 / 18.43	344.5 / 13.56	303 / 11.93	1955185	3	11	UT6215Z

R 134a - HBP

MODEL	PARTIAL BILL OF MATERIALS	VOLTAGE / FREQUENCY	MOTOR TYPE	EXPANSIVE DEVICE	PERFORMANCE / EVAPORATING TEMPERATURE °C - **										RECEIVER CAPACITY	VALVES TUBE LINE O.D.		TUBE (no valves) TUBE LINE O.D.		
					-15	-10	-5	0	5	RATED 7.2			10	dm ³ (l)		SUCTION inch	DISCHARGE inch	SUCTION mm / inch	DISCHARGE mm / inch	PROCESS mm / inch
					W	W	W	W	W	W	W Inp	RLA	W							
UJ6220Z	564PA	220-240V 50Hz	CSR	C-V	994	1256	1529	1843	2154	2285	1085	6.6	2488	2.3	1/2	3/8	9.52 / 0.38	9.52 / 0.38	9.52 / 0.38	
UJ6220Z	564PD	208-230V 60Hz (200V 50Hz)	CSR	C-V	1163	1470	1790	2156	2520	2673	1330	9.0	2912	2.3	1/2	3/8	9.52 / 0.38	9.52 / 0.38	9.52 / 0.38	
UJ6220Z	564PG	115V 60Hz (100V 50Hz)	CSR	C-V	1163	1470	1790	2156	2520	2673	1330	9.0	2912	2.3	1/2	3/8	9.52 / 0.38	9.52 / 0.38	9.52 / 0.38	
UJ6226Z	562EA	220-240V 50Hz	CSR	C-V	1372	1686	2035	2419	2814	3006	1355	6.6	3244	2.3	5/8	3/8	9.52 / 0.38	9.52 / 0.38	9.52 / 0.38	
UJ6226Z	562ED	208-230V 60Hz (200V 50Hz)	CSR	C-V	1606	1973	2381	2830	3292	3516	1610	9.0	3795	2.3	5/8	3/8	9.52 / 0.38	9.52 / 0.38	9.52 / 0.38	
UJ6220ZX	568PM	380-420V 50Hz (440-480V 60Hz)	3 Ph	C-V	994	1256	1529	1843	2154	2285	1004	1.6	2488	2.3	1/2	3/8	9.52 / 0.38	9.52 / 0.38	9.52 / 0.38	
UJ6226ZX	566EM	380-420V 50Hz (440-480V 60Hz)	3 Ph	C-V	1372	1686	2035	2419	2814	3006	1293	2.3	3244	2.3	5/8	3/8	9.52 / 0.38	9.52 / 0.38	9.52 / 0.38	

* Model NOT forseen to be in Restyling version.

** Ambient 32°C (90°F) / Max. Subcooling 3°C (5°F) / Evaporator outlet and gas return 32°C (90°F).

R 22 - M/HBP

MODEL	PARTIAL BILL OF MATERIALS	VOLTAGE / FREQUENCY	MOTOR TYPE	EXPANSIVE DEVICE	PERFORMANCE / EVAPORATING TEMPERATURE °C - **										RECEIVER CAPACITY	VALVES TUBE LINE O.D.		TUBE (no valves) TUBE LINE O.D.				
					-20	-15	-10	-5	0	5	RATED 7.2			10		15	dm ³ (l)	SUCTION inch	DISCHARGE inch	SUCTION mm / inch	DISCHARGE mm / inch	PROCESS mm / inch
					W	W	W	W	W	W	W	W Inp	RLA	W		W						
UNB6144E	684IA	220-240V 50Hz	CSIR	C-V	-	259	313	372	435	506	547	310	2.0	593	-	0.6	3/8	1/4	-	-	-	
UNB6152E	684LA	220-240V 50Hz	CSIR	C-V	-	308	372	442	517	605	645	355	2.2	698	-	0.6	3/8	1/4	-	-	-	
UNB6165E	684NA	220-240V 50Hz	CSIR	C-V	-	372	451	541	634	733	779	470	2.8	837	-	1.1	3/8	1/4	-	-	-	
UNE6181E	672LA	220-240V 50Hz	CSIR	C-V	-	442	547	663	784	909	969	530	3.1	1030	-	1.1	3/8	1/4	-	-	-	
UNE6181E	672LG	115V 60Hz (100V 50Hz)	CSIR	C-V	-	577	681	808	957	1070	1128	683	2.3	1210	-	1.0	3/8	1/4	-	-	-	
UNE6195E	671LG	115V 60Hz (100V 50Hz)	CSIR	C-V	-	398	514	655	819	1007	1097	495	7.6	1190	-	1.0	3/8	1/4	-	-	-	
UNE6210E	671NA	220V-240V 50Hz	CSIR	C-V	-	607	762	926	1102	1279	1365	600	3.4	1450	-	1.1	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24	
UNE6210E	671NG	115V 60Hz (100V 50Hz)	CSIR	C-V	-	607	762	926	1102	1279	1365	730	8.1	1476	-	1.0	3/8	1/4	-	-	-	
UNE6210E	671ND	208-230V 60Hz (200V 50Hz)	CSIR	C-V	-	607	762	926	1102	1279	1365	758	4.2	1476	-	1.0	3/8	1/4	-	-	-	
UNE9213E	673EA	220-240V 50Hz	CSR	C-V	523	663	829	1000	1198	1390	1483	775	3.6	1650	-	1.2	3/8	1/4	-	-	-	
UNE9213E	673EG	115V 60Hz (100V 50Hz)	CSR	C-V	507	649	827	1039	1286	1569	1704	752	8.4	1886	-	1.3	3/8	1/4	-	-	-	
UT6217E	636MA	220-240V 50Hz	CSR	C-V	-	791	1012	1244	1488	1744	1860	800	3.6	2017	-	2.3	1/2	3/8	-	-	-	
UT6217E	636MD	208-230V 60Hz (200V 50Hz)	CSIR	C-V	-	909	1158	1424	1709	2013	2170	908	7.0	2334	-	2.3	1/2	3/8	-	-	-	
UT6217E	636MG	115V 60Hz (100V 50Hz)	CSR	C-V	-	909	1158	1424	1709	2013	2170	900	12.8	2334	-	2.3	1/2	3/8	-	-	-	
UT6220E	636LA	220-240V 50Hz	CSR	C-V	-	942	1221	1500	1788	2093	2227	1090	4.6	2407	-	2.3	1/2	3/8	-	-	-	
UT6220E	636LG	115V 60Hz (100V 50Hz)	CSR	C-V	-	1102	1492	1755	2092	2449	2605	1003	4.2	2816	-	2.3	1/2	3/8	-	-	-	
UT6220E	636LD	208-230V 60Hz (200V 50Hz)	CSR	C-V	-	1102	1492	1755	2092	2449	2605	1003	7.0	2816	-	2.3	1/2	3/8	-	-	-	
UT6222E	636YG	115V 60Hz (100V 50Hz)	CSR	C-V	-	1023	1332	1700	2124	2608	2880	1264	1.6	3151	-	2.3	1/2	3/8	-	-	-	
UT6222E	636YD	208-230V 60Hz (200V 50Hz)	CSR	C-V	-	1023	1332	1700	2124	2608	2880	1264	1.5	3151	-	2.3	1/2	3/8	-	-	-	
UJ9226E	664IV	230V 50Hz	CSR	C-V	948	1221	1552	1895	2250	2605	2785	1230	5.8	2965	-	2.3	5/8	3/8	-	-	-	
UJ9226E	664IV	230V 50Hz	CSR	C-V	948	1221	1552	1895	2250	2605	2785	1230	5.8	2965	-	2.3	5/8	3/8	-	-	-	
UJ9226E	664ID	208-230V 60Hz (200V 50Hz)	CSR	C-V	1110	1461	1645	2076	2587	3176	3500	1124	6.5	3844	-	2.3	5/8	3/8	-	-	-	
UJ9226E	664ID	208-230V 60Hz	CSR	C-V	1110	1461	1645	2076	2587	3176	3500	1124	6.5	3844	-	2.3	5/8	3/8	-	-	-	
UJ9226P	668IM	380-420V 50Hz (440-480V 60Hz)	3 Ph	C-V	889	1129	1438	1816	2263	2778	3026	1134	3.6	3361	-	2.3	5/8	3/8	-	-	-	
UJ7228F	662FA	220-240V 50Hz	CSR	C-V	-	-	-	-	2442	2837	3023	1380	6.5	3256	3674	2.3	5/8	3/8	-	-	-	
UJ7228P	666DM	380-420V 50Hz (440-480V 60Hz)	3 Ph	C-V	-	-	-	-	2442	2837	3023	1300	2.7	3256	3674	2.3	5/8	3/8	-	-	-	
UJ7231F *	664EA	220-240V 50Hz	CSR	C-V	-	-	-	-	2733	3324	3606	1460	7.9	3984	4715	3.9	5/8	1/2	-	-	-	
UJ7231P *	668CM	380-420V 50Hz (440-480V 60Hz)	3 Ph	C-V	-	-	-	-	2733	3324	3606	1335	3.7	3984	4715	3.9	5/8	1/2	-	-	-	
UJ9232E *	663MV	230V 50Hz	CSR	C-V	1605	1901	2279	2680	3140	3628	3860	1470	7.9	4163	-	3.9	5/8	1/2	-	-	-	
UJ9232E	663MV	230V 50Hz	CSR	C-V	1605	1901	2279	2680	3140	3628	3860	1470	7.9	4163	-	3.9	5/8	1/2	-	-	-	
UJ9232E	667HM	230V 50Hz	3 Ph	C-V	1628	1907	2233	2628	3047	3512	3721	1620	3.6	4012	-	2.3	5/8	3/8	-	-	-	
UJ9232P *	667HM	380-420V 50Hz (440-480V 60Hz)	3 Ph	C-V	1628	1907	2233	2628	3047	3512	3721	1620	2.9	4012	-	3.9	5/8	1/2	-	-	-	
UJ7238E *	663AA	220-240V 50Hz	CSR	C-V	-	-	-	-	3337	4058	4428	1959	10.9	4943	5992	3.9	5/8	1/2	-	-	-	
UJ9238E *	663GV	230V 50Hz	CSR	C-V	1400	1791	2261	2809	3436	4142	4478	1856	8.83	4927	-	3.9	5/8	1/2	-	-	-	
UJ9238E	663GV	230V 50Hz	CSR	C-V	1400	1791	2261	2809	3436	4142	4478	1856	9.0	4927	-	2.3	5/8	3/8	-	-	-	
UJ9238E	667GM	230V 50Hz	CSR	C-V	1400	1791	2261	2809	3436	4142	4478	1856	4.8	4927	-	2.3	5/8	3/8	-	-	-	
UJ9238P *	667GM	380-420V 50Hz (440-480V 60Hz)	3 Ph	C-V	1400	1791	2261	2809	3436	4142	4478	1856	8.83	4927	-	3.9	5/8	1/2	-	-	-	
UJ7240P *	667CM	380-420V 50Hz (440-480V 60Hz)	3 Ph	C-V	-	-	-	-	4070	4733	5035	2120	3.8	5407	6163	3.9	5/8	1/2	-	-	-	
UJ7240F *	663FA	220-240V 50Hz	CSR	C-V	-	-	-	-	3627	4455	4851	2048	10.5	5383	6410	3.9	5/8	1/2	-	-	-	

* Model NOT forseen to be in Restyling version.

** Ambient 32°C (90°F) / Max. Subcooling 3°C (5°F) / Evaporator outlet and gas return 32°C (90°F).

	FAN			FAN MOTOR			WEIGHT (Only Reference) kg / lb	OVERALL DIMENSIONS - STANDARD				OVERALL DIMENSIONS - RESTYLING				CONDENSER		MODEL
	O.D. mm / inch	No. & Angle of Blades	Air Flow Rate	Rated Output	Rated Input	Rated Input		A	B	C	DRAWING NUMBER	A	B	C	DRAWING NUMBER	No. OF ROWS	No. OF TUBES	
			m ³ (h)	W	W	A		mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch			
	275 / 10.83	5/31°	700	30	95	0.75	34.7 / 76.5	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.30	324 / 12.76	1955186	4	12	UJ6220Z
	275 / 10.83	5/31°	800	25	110	0.75	34.7 / 76.5	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.30	324 / 12.76	1955186	4	12	UJ6220Z
	275 / 10.83	5/31°	800	25	110	1.10	34.7 / 76.5	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.30	324 / 12.76	1955186	4	12	UJ6220Z
	275 / 10.83	5/31°	600	30	95	0.75	37.5 / 82.7	477 / 18.78	414 / 16.30	325 / 12.80	1955151	507 / 19.96	410 / 16.30	390 / 15.35	1955195	4	12	UJ6226Z
	275 / 10.83	5/31°	980	25	110	0.75	36.7 / 80.9	477 / 18.78	414 / 16.30	325 / 12.80	1955151	507 / 19.96	410 / 16.30	390 / 15.35	1955195	4	12	UJ6226Z
	275 / 10.83	5/31°	850	25	110	0.49	34.7 / 76.5	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.30	324 / 12.76	1955186	4	12	UJ6220ZX
	275 / 10.83	5/31°	850	25	110	0.49	34.7 / 76.5	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.30	324 / 12.76	1955186	4	12	UJ6226ZX

	FAN			FAN MOTOR			WEIGHT (Only Reference) kg / lb	OVERALL DIMENSIONS - STANDARD				OVERALL DIMENSIONS - RESTYLING				CONDENSER		MODEL
	O.D. mm / inch	No. & Angle of Blades	Air Flow Rate	Rated Output	Rated Input	Rated Input		A	B	C	DRAWING NUMBER	A	B	C	DRAWING NUMBER	No. OF ROWS	No. OF TUBES	
			m ³ (h)	W	W	A		mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch			
	200 / 7.87	5/28°	240	10	38	0.25	17.4 / 38.4	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	3	8	UNB6144E
	200 / 7.87	5/28°	240	10	38	0.25	17.4 / 38.4	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	3	8	UNB6152E
	230 / 9.06	5/28°	320	10	38	0.25	17.9 / 39.5	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNB6165E
	254 / 10.00	5/28°	320	16	65	0.42	21.9 / 48.3	470 / 18.50	340 / 13.39	303 / 11.93	1955176	465 / 18.31	340 / 13.39	296 / 11.65	1955184	3	11	UNE6181E
	254 / 10.00	5/28°	370	16	72	0.74	21.0 / 46.3	470 / 18.50	340 / 13.39	303 / 11.93	1955176	465 / 18.31	340 / 13.39	296 / 11.65	1955184	3	11	UNE6181E
	254 / 10.00	5/28°	370	16	72	0.74	21.0 / 46.3	470 / 18.50	340 / 13.39	303 / 11.93	1955176	470 / 18.90	340 / 13.39	303 / 11.93	1955184	3	11	UNE6195E
	254 / 10.00	5/28°	320	16	65	0.42	21.0 / 46.3	470 / 18.50	340 / 13.39	303 / 11.93	1955176	465 / 18.31	340 / 13.39	296 / 11.65	1955184	3	11	UNE6210E
	254 / 10.00	5/28°	620	16	58	0.36	21.0 / 46.3	470 / 18.50	340 / 13.39	303 / 11.93	1955176	470 / 18.50	340 / 13.39	303 / 11.93	1955184	3	11	UNE6210E
	254 / 10.00	5/28°	620	16	60	0.42	21.0 / 46.3	470 / 18.50	340 / 13.39	303 / 11.93	1955176	470 / 18.50	340 / 13.39	303 / 11.93	1955184	3	11	UNE6210E
	254 / 10.00	5/28°	320	16	65	0.62	23.0 / 50.7	505 / 19.88	340 / 13.39	303 / 11.93	1955175	505 / 19.88	340 / 13.39	296 / 11.65	1955190	3	11	UNE9213E
	254 / 10.00	5/28°	370	16	72	0.74	22.5 / 49.6	505 / 19.88	340 / 13.39	303 / 11.93	1955175	505 / 19.88	340 / 13.39	296 / 11.65	1955190	3	11	UNE9213E
	275 / 10.83	5/31°	600	34	95	0.75	30.7 / 67.7	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	3	12	UT6217E
	275 / 10.83	5/31°	980	25	110	0.75	29.5 / 65.0	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	3	12	UT6217E
	275 / 10.83	5/31°	600	30	95	1.50	30.7 / 67.7	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	3	12	UT6217E
	275 / 10.83	5/31°	600	34	110	0.75	32.2 / 71.0	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	4	12	UT6220E
	275 / 10.83	5/31°	800	25	110	1.10	31.7 / 69.9	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	3	12	UT6220E
	275 / 10.83	5/31°	800	25	110	0.75	31.7 / 69.9	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	3	12	UT6220E
	275 / 10.83	5/31°	800	34	110	1.35	31.7 / 69.9	495 / 19.49	415 / 16.34	325 / 12.80	1955158	494 / 19.45	415 / 16.34	325 / 12.80	1955194	3	12	UT6222E
	275 / 10.83	5/31°	800	25	110	0.75	31.7 / 69.9	495 / 19.49	415 / 16.34	325 / 12.80	1955158	494 / 19.45	415 / 16.34	325 / 12.80	1955194	3	12	UT6222E
	300 / 11.81	5/28°	850	30	95	0.75	38.0 / 83.8	510 / 20.08	415 / 16.34	390 / 15.35	1955162	507 / 19.96	410 / 16.14	390 / 15.35	1955195	4	14	UJ9226E
	2x254/10.00	5/28°	1160	2x16	2x65	2x0.42	40.0 / 88.2	440 / 17.32	612 / 24.09	323 / 12.72	1955209	-	-	-	-	3	11	UJ9226E
	300 / 11.81	5/28°	980	25	110	0.75	37.5 / 82.7	510 / 20.08	415 / 16.34	390 / 15.35	1955162	507 / 19.96	410 / 16.14	390 / 15.35	1955195	4	14	UJ9226E
	2x254/10.00	5/28°	1160	2x16	2x65	2x0.42	40.0 / 88.2	440 / 17.32	612 / 24.09	323 / 12.72	1955209	-	-	-	-	3	11	UJ9226E
	300 / 11.81	5/28°	980	25	110	0.49	38.5 / 84.9	510 / 20.08	415 / 16.34	390 / 15.35	1955162	510 / 20.08	415 / 16.34	390 / 15.35	1955195	4	14	UJ9226P
	300 / 11.81	6/27°	850	30	95	0.75	37.0 / 81.6	510 / 20.08	415 / 16.34	390 / 15.35	1955162	507 / 19.96	410 / 16.14	390 / 15.35	1955195	4	14	UJ7228F
	275 / 10.83	5/31°	850	25	110	0.49	35.2 / 77.6	477 / 18.78	414 / 16.30	325 / 12.80	1955151	477 / 18.78	410 / 16.14	324 / 12.76	1955186	4	12	UJ7228P
	300 / 11.81	6/27°	1100	25	110	0.49	42.8 / 94.3	600 / 23.62	503 / 19.80	396 / 15.59	1955160	-	-	-	-	3	14	UJ7231F *
	300 / 11.81	6/27°	1100	60	120	0.65	41.3 / 91.0	600 / 23.62	503 / 19.80	396 / 15.59	1955160	-	-	-	-	3	14	UJ7231P *
	300 / 11.81	6/27°	1100	60	120	1.10	43.8 / 96.6	600 / 23.62	503 / 19.80	396 / 15.59	1955160	-	-	-	-	3	14	UJ9232E *
	2x254/10.00	5/28°	1160	2x16	2x65	2x0.42	44.0 / 97.0	440 / 17.32	783 / 30.83	313 / 12.32	1955209	-	-	-	-	3	11	UJ9232E
	2x254/10.00	5/28°	1160	2x16	2x65	2x0.42	44.0 / 97.0	440 / 17.32	783 / 30.83	313 / 12.32	1955209	-	-	-	-	3	11	UJ9232E
	300 / 11.81	6/27°	1100	60	120	0.65	41.3 / 91.0	600 / 23.62	503 / 19.80	396 / 15.59	1955160	-	-	-	-	3	14	UJ9232P *
	350 / 13.78	4/18°	1200	60	120	0.65	45.8 / 100.1	600 / 23.62	503 / 19.80	421 / 16.57	1955160	-	-	-	-	4	15	UJ7238E *
	350 / 13.78	4/18°	1200	60	120	0.65	45.3 / 99.9	600 / 23.62	503 / 19.80	421 / 16.57	1955160	-	-	-	-	4	15	UJ9238E *
	2x254/10.00	5/28°	1160	2x16	2x65	2x0.42	45.0 / 99.2	460 / 18.11	783 / 30.83	313 / 12.32	1955209	-	-	-	-	4	11	UJ9238E
	2x254/10.00	5/28°	1160	2x16	2x65	2x0.42	45.0 / 99.2	460 / 18.11	783 / 30.83	313 / 12.32	1955209	-	-	-	-	4	11	UJ9238E
	350 / 13.78	4/18°	1200	60	120	0.65	45.3 / 99.9	600 / 23.62	503 / 19.80	421 / 16.57	1955160	-	-	-	-	4	15	UJ9238P *
	350 / 13.78	4/18°	1200	60	120	0.65	45.8 / 100.1	600 / 23.62	503 / 19.80	421 / 16.57	1955160	-	-	-	-	4	15	UJ7240P *
	350 / 13.78	4/18°	1200	60	120	0.65	46.8 / 103.2	600 / 23.62	503 / 19.80	421 / 16.57	1955160	-	-	-	-	4	15	UJ7240F *

R 404A / R 507 - MBP



MODEL	PARTIAL BILL OF MATERIALS	VOLTAGE / FREQUENCY	MOTOR TYPE	EXPANSIVE DEVICE	PERFORMANCE / EVAPORATING TEMPERATURE °C - **										RECEIVER CAPACITY	VALVES		TUBE (no valves)		
					-20	-15	-10	-5	0	5	RATED 7.2			10		TUBE LINE O.D.		TUBE LINE O.D.		
					W	W	W	W	W	W	W	W Inp	RLA	W		dm³ (l)	SUCTION	DISCHARGE	SUCTION	DISCHARGE
UNB6144GK	684JA	220-240V 50Hz	CSIR	C-V	228	283	341	402	467	537	570	362	2.3	610	0.6	3/8	1/4	-	-	-
UNB6152GK	684MA	220-240V 50Hz	CSIR	C-V	271	336	405	478	556	638	677	410	2.6	726	0.6	3/8	1/4	-	-	-
UNB6165GK	684OA	220-240V 50Hz	CSIR	C-V	239	296	362	436	519	602	654	501	3.0	711	1.1	3/8	1/4	-	-	-
UNB6165GK	684OG	115V 60Hz (100V 50Hz)	CSIR	C-V	268	340	425	524	636	763	823	517	7.7	903	1.0	3/8	1/4	-	-	-
UNE6181GK	672UA	220-240V 50Hz	CSIR	C-V	406	505	613	730	856	990	1052	590	3.5	1130	1.1	3/8	1/4	-	-	-
UNE6181GK	672UG	115V 60Hz (100V 50Hz)	CSIR	C-V	420	556	716	903	1115	1532	1480	582	7.2	1616	1.0	3/8	1/4	-	-	-
UNE6181GK	672UN	200-240V 50Hz (230V 60Hz)	CSIR	C-V	406	505	613	730	856	990	1052	590	3.5	1130	1.0	3/8	1/4	8 / 0.31	6 / 0.24	6 / 0.24
UNE6195GK	671WG	115V 60Hz (100V 50Hz)	CSIR	C-V	423	568	725	914	1122	1370	1500	565	7.9	1640	1.0	3/8	1/4	-	-	-
UNE6210GK	671YA	220-240V 50Hz	CSIR	C-V	470	557	663	786	928	1087	1164	652	3.8	1265	1.1	3/8	1/4	-	-	-
UNE6210GK	671YD	208-230V 60Hz	CSIR	C-V	519	690	852	1003	1144	1279	1329	652	3.8	1394	-	3/8	1/4	-	-	-
UNE9213GK	673XA	220-240V 50Hz	CSR	C-V	626	785	945	1106	1267	1430	1502	843	3.9	1756	1.2	3/8	1/4	-	-	-
UNE9213GK	673XG	115V 60Hz (100V 50Hz)	CSR	C-V	689	815	1016	1267	1480	1669	1741	1218	9.7	1827	1.3	3/8	1/4	-	-	-
UT6217GK	636VA	220-240V 50Hz	CSIR	C-V	719	931	1144	1365	1591	1822	1926	1102	5.1	2058	2.3	1/2	3/8	-	-	-
UT6217GK	636VG	115V 60Hz (100V 50Hz)	CSR	C-V	841	1089	1338	1597	1861	2132	2253	1068	14.3	2408	2.3	1/2	3/8	-	-	-
UT6217GK	636VD	208-230V 60Hz (200V 50Hz)	CSIR	C-V	841	1089	1338	1597	1861	2132	2253	1084	8.2	2408		1/2	3/8	-	-	-
UT6220GK	636RA	220-240V 50Hz	CSR	C-V	856	1106	1363	1626	1894	2170	2293	1212	5.6	2450	2.3	1/2	3/8	-	-	-
UT6220GK	636RG	115V 60Hz (100V 50Hz)	CSR	C-V	1002	1294	1595	1902	2216	2539	2683	1331	16.5	2867	2.3	1/2	3/8	-	-	-
UT6220GK	636RD	208-230V 60Hz (200V 50Hz)	CSR	C-V	1002	1294	1595	1902	2216	2539	2683	1134	7.9	2867	2.3	1/2	3/8	-	-	-
UT6222GK	636ZG	115V 60Hz (100V 50Hz)	CSR	C-V	-	1300	1600	1900	2251	2712	3000	1426	17.1	3214	2.3	1/2	3/8	-	-	-
UT6222GK	636ZD	208-230V 60Hz (200V 50Hz)	CSR	C-V	-	1300	1600	1900	2251	2712	3000	1426	9.5	3214	2.3	1/2	3/8	-	-	-
UJ9226GK	664LV	230V 50Hz	CSR	C-V	996	1348	1722	2115	2528	2960	3155	1415	6.4	3415	2.3	5/8	3/8	-	-	-
UJ9226GK	664LV	230V 50Hz	CSR	C-V	996	1348	1722	2115	2528	2960	3155	1415	6.6	3415	2.3	5/8	3/8	-	-	-
UJ9226GK	664LD	208-230V 60Hz (200V 50Hz)	CSR	C-V	1084	1435	1853	2338	2890	3508	3850	1432	9.7	4194	2.3	5/8	3/8	-	-	-
UJ9226GK	664LD	208-230V 60Hz	CSR	C-V	1084	1435	1853	2338	2890	3508	3850	1432	9.1	4194	2.3	5/8	3/8	-	-	-
UJ9226GS	668LM	380-420V 50Hz (440-480 60Hz)	3 Ph	C-V	1206	1523	1822	2094	2364	2616	2720	1300	3.9	2831	2.3	5/8	3/8	-	-	-
UJ9232GK *	664FV	230V 50Hz	CSR	C-V	1467	1855	2219	2550	2879	3186	3365	1709	7.8	3448	3.9	5/8	1/2	-	-	-
UJ9232GK	664FV	230V 50Hz	CSR	C-V	1467	1855	2219	2550	2879	3186	3365	1709	8.5	3448	2.3	5/8	3/8	-	-	-
UJ9232GS	664FM	380-420V 50Hz	3 Ph	C-V	1467	1855	2219	2550	2879	3186	3365	1709	3.7	3448	2.3	5/8	3/8	-	-	-
UJ9232GS *	668FM	380-420V 50Hz (440-480 60Hz)	3 Ph	C-V	1467	1855	2219	2550	2879	3186	3365	1685	2.8	3448	3.9	5/8	1/2	-	-	-
UJ9238GK	663RV	230V 50Hz	CSR	C-V	1817	2297	2748	3157	3565	3983	4166	2215	10.4	4269	2.3	5/8	3/8	-	-	-
UJ9238GK *	663UV	230V 50Hz	CSR	C-V	1817	2297	2748	3157	3565	3983	4166	2215	10.1	4269	3.9	5/8	1/2	-	-	-
UJ9238GS	663UM	380-420 50Hz	3 Ph	C-V	1817	2297	2748	3157	3565	3983	4166	2215	4.8	4269	2.3	5/8	3/8	-	-	-
UJ9238GS *	667UM	380-420 50Hz (440-480 60Hz)	3 Ph	C-V	1817	2297	2748	3157	3565	3983	4166	2185	3.6	4269	3.9	5/8	1/2	-	-	-

* Model NOT forseen to be in Restyling version.





** Ambient 32°C (90°F) / Max. Subcooling 3°C (5°F) / Evaporator outlet and gas return 32°C (90°F).

EXTERNAL VIEWS

1.955.174 - STANDARD


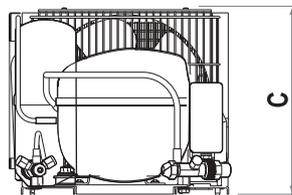
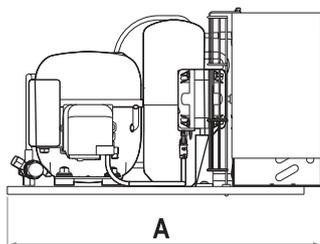


1.955.191 - RESTYLING

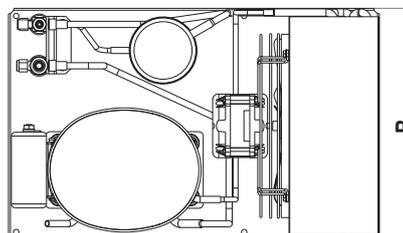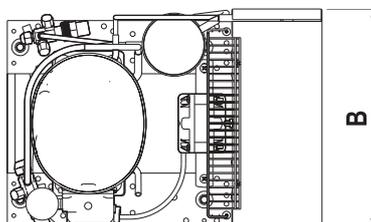
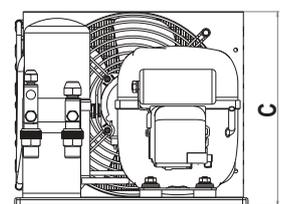
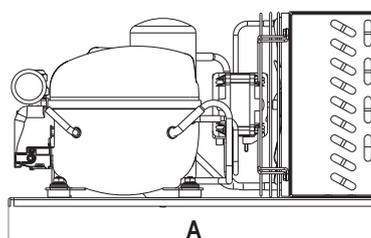


	FAN			FAN MOTOR			WEIGHT (Only Reference) kg / lb	OVERALL DIMENSIONS - STANDARD				OVERALL DIMENSIONS - RESTYLING				CONDENSER		MODEL
	O.D. mm / inch	No. & Angle of Blades	Air Flow Rate	Rated Output	Rated Input	Rated Input		A	B	C	DRAWING NUMBER	A	B	C	DRAWING NUMBER	No. OF ROWS	No. OF TUBES	
			m ³ (h)	W	W	A		mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch				
200 / 7.87	5/28°	240	10	38	0.25	17.4 / 38.4	430 / 13.93	324 / 12.76	233 / 9.17	1955174	480 / 18.90	300 / 11.81	226 / 8.90	1955191	3	8	UNB6144GK	
200 / 7.87	5/28°	240	10	38	0.25	17.4 / 38.4	440 / 17.32	280 / 11.02	233 / 9.17	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	8	UNB6152GK	
230 / 9.06	5/28°	340	16	65	0.42	17.2 / 37.9	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNB6165GK	
230 / 9.06	5/28°	320	9	34	0.58	17.9 / 39.5	440 / 17.32	310 / 12.20	263 / 10.35	1955174	480 / 18.90	300 / 11.81	254 / 10.00	1955191	3	9	UNB6165GK	
254 / 10.00	5/28°	320	16	65	0.42	23.0 / 50.7	430 / 13.93	324 / 12.76	303 / 11.93	1955176	465 / 18.31	340 / 13.39	296 / 11.65	1955184	3	11	UNE6181GK	
254 / 10.00	5/28°	370	16	74	0.74	20.0 / 44.1	470 / 18.50	340 / 13.39	303 / 11.93	1955176	465 / 18.31	340 / 13.39	296 / 11.65	1955184	3	11	UNE6181GK	
254 / 10.00	5/28°	320	16	65	0.42	20.0 / 44.1	470 / 18.50	340 / 13.39	303 / 11.93	1955176	465 / 18.31	340 / 13.39	296 / 11.65	1955184	3	11	UNE6181GK	
254 / 10.00	5/28°	370	16	72	0.74	20.0 / 44.1	470 / 18.50	340 / 13.39	303 / 11.93	1955176	470 / 18.50	340 / 13.39	303 / 11.93	1955184	3	11	UNE6195GK	
254 / 10.00	5/28°	320	16	65	0.42	20.8 / 45.8	470 / 18.50	340 / 13.39	303 / 11.93	1955176	465 / 18.31	340 / 13.39	296 / 11.65	1955184	3	11	UNE6210GK	
254 / 10.00	5/28°	320	16	72	0.36	20.5 / 45.2	430 / 16.93	338 / 13.31	297 / 11.69	1955173	465 / 18.31	340 / 13.39	296 / 11.65	1955184	3	11	UNE6210GK	
254 / 10.00	NA	320	16	65	0.42	22.5 / 49.6	505 / 19.88	340 / 13.39	303 / 11.93	1955175	505 / 19.88	340 / 13.39	296 / 11.65	1955190	3	11	UNE9213GK	
254 / 10.00	NA	370	16	72	0.74	22.5 / 49.6	505 / 19.88	340 / 13.39	303 / 11.93	1955175	470 / 18.50	340 / 13.39	303 / 11.93	1955190	3	11	UNE9213GK	
275 / 10.83	5/31°	600	34	95	0.75	34.7 / 76.5	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	3	12	UT6217GK	
275 / 10.83	5/31°	800	25	110	1.50	34.7 / 76.5	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	3	12	UT6217GK	
275 / 10.83		600	30	95	0.75	29.0 / 63.9	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	3	12	UT6217GK	
275 / 10.83	5/31°	800	34	110	0.75	31.7 / 39.9	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	3	12	UT6220GK	
275 / 10.83	5/31°	800	26	110	1.50	30.7 / 67.7	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	3	12	UT6220GK	
275 / 10.83	5/31°	800	25	110	0.75	30.7 / 67.7	495 / 19.49	415 / 16.34	325 / 12.80	1955158	495 / 19.49	410 / 16.14	324 / 12.76	1955194	3	12	UT6220GK	
275 / 10.83	5/31°	800	34	110	2.5	31.7 / 69.9	495 / 19.49	415 / 16.34	325 / 12.80	1955158	494 / 19.45	415 / 16.34	325 / 12.80	1955194	3	12	UT6222GK	
275 / 10.83	5/31°	800	25	110	2.5	32.2 / 70.9	495 / 19.49	415 / 16.34	325 / 12.80	1955158	494 / 19.45	415 / 16.34	325 / 12.80	1955194	3	12	UT6222GK	
300 / 11.81	5/28°	850	30	95	0.75	37.5 / 82.7	510 / 20.08	415 / 16.34	390 / 15.35	1955162	507 / 19.96	410 / 16.14	390 / 15.35	1955195	4	14	UJ9226GK	
2x254/10.00	5/28°	1160	2x16	2x65	2x0.42	40.0 / 88.2	440 / 17.32	612 / 24.09	323 / 12.72	1955209	-	-	-	-	3	11	UJ9226GK	
300 / 11.81	5/28°	980	25	110	0.75	37.5 / 82.7	510 / 20.08	415 / 16.34	390 / 15.35	1955162	507 / 19.96	410 / 16.14	390 / 15.35	1955195	4	14	UJ9226GK	
2x254/10.00	5/28°	1160	2x16	2x65	2x0.36	40.0 / 88.2	440 / 17.32	612 / 24.09	323 / 12.72	1955209	-	-	-	-	3	11	UJ9226GK	
300 / 11.81	5/28°	980	25	110	0.49	42.5 / 93.7	510 / 20.08	415 / 16.34	390 / 15.35	1955162	507 / 19.96	410 / 16.14	390 / 15.35	1955195	4	14	UJ9226GS	
300 / 11.81	6/27°	1100	60	120	1.10	42.3 / 93.2	600 / 23.62	503 / 19.80	396 / 15.59	1955160	-	-	-	-	3	14	UJ9232GK *	
2x254/10.00	5/28°	1160	2x16	2x65	2x0.42	44.0 / 97.0	440 / 17.32	783 / 30.83	313 / 12.32	1955209	-	-	-	-	3	11	UJ9232GK	
2x254/10.00	5/28°	1160	2x16	2x65	2x0.42	44.0 / 97.0	440 / 17.32	783 / 30.83	313 / 12.32	1955209	-	-	-	-	3	11	UJ9232GS	
300 / 11.81	6/27°	1100	60	120	0.65	43.8 / 96.5	600 / 23.62	503 / 19.80	396 / 15.59	1955160	-	-	-	-	3	14	UJ9232GS *	
2x254/10.00	5/28°	1160	2x16	2x65	2x0.42	45.0 / 99.2	460 / 18.11	783 / 30.83	313 / 12.32	1955209	-	-	-	-	4	11	UJ9238GK	
350 / 13.78	4/18°	1200	60	120	1.10	45.3 / 99.9	600 / 23.62	503 / 19.80	421 / 16.57	1955160	-	-	-	-	4	15	UJ9238GK *	
2x254/10.00	5/28°	1160	2x16	2x65	2x0.42	45.0 / 99.2	460 / 18.11	783 / 30.83	313 / 12.32	1955209	-	-	-	-	4	11	UJ9238GS	
350 / 13.78	4/18°	1200	60	120	0.65	45.3 / 99.9	600 / 23.62	503 / 19.80	421 / 16.57	1955160	-	-	-	-	4	15	UJ9238GS *	

1.955.176 - STANDARD

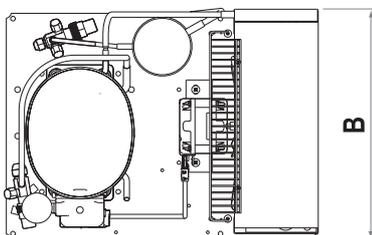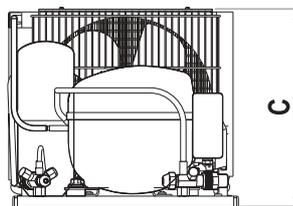
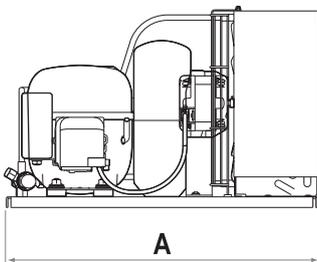


1.955.184 - RESTYLING

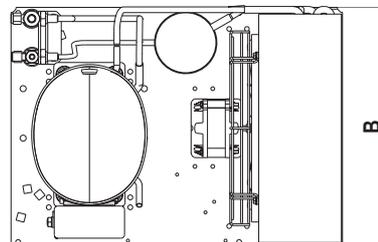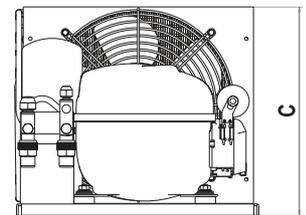
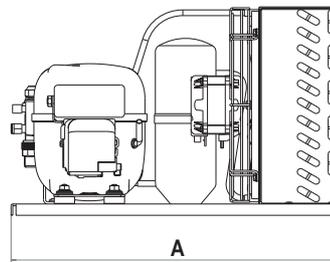


EXTERNAL VIEWS



1.955.175 - STANDARD

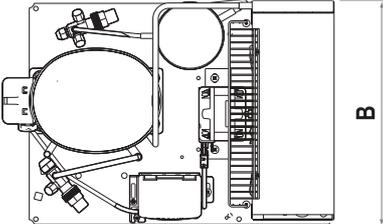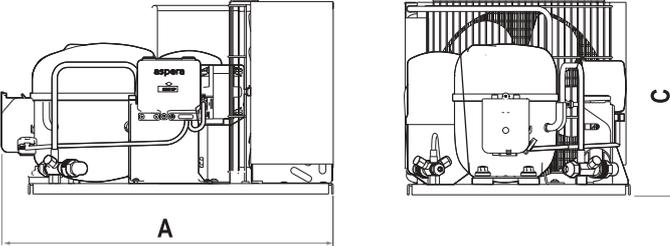



1.955.190 - RESTYLING

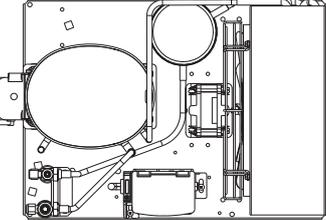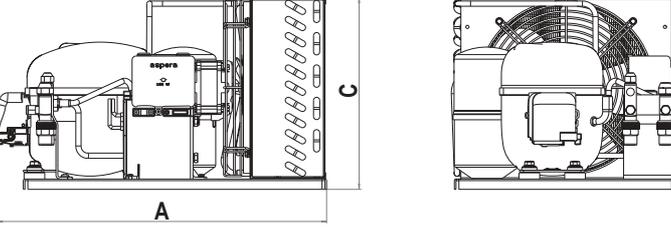



1.955.143 - STANDARD

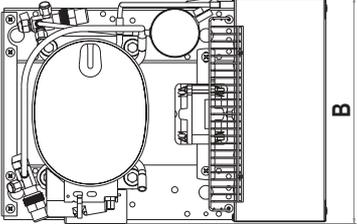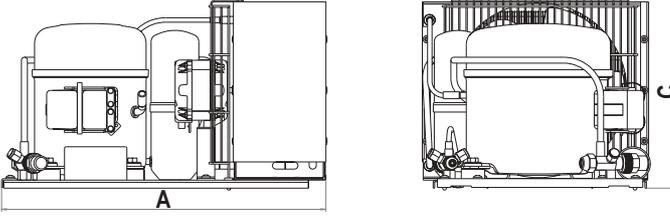



1.955.192 - RESTYLING

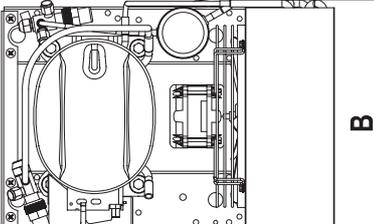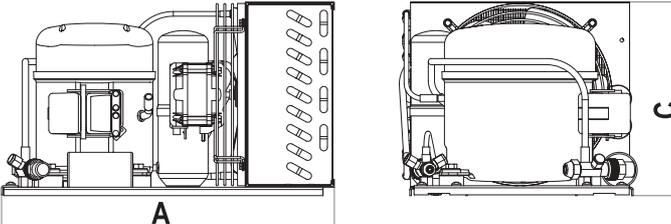



1.955.153 - STANDARD

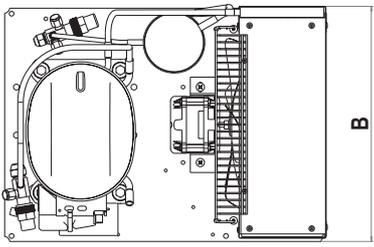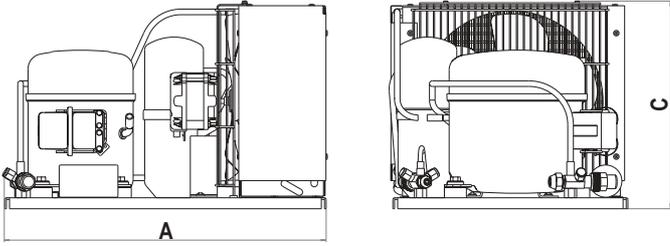



1.955.185 - RESTYLING

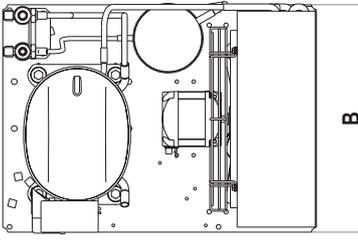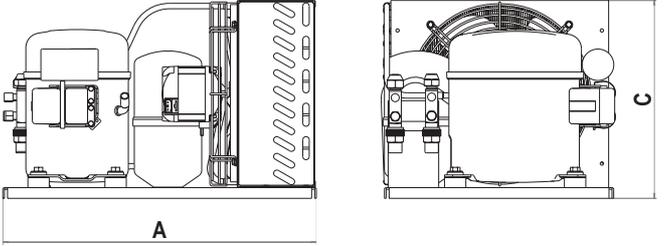



1.955.145 - STANDARD

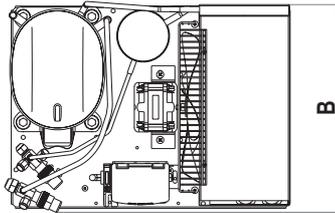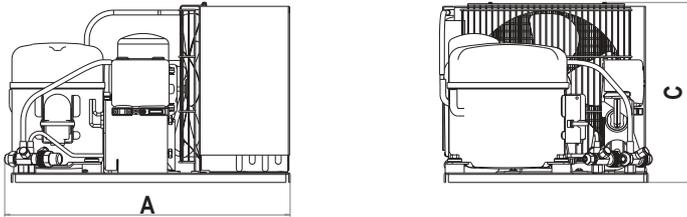



1.955.193 - RESTYLING

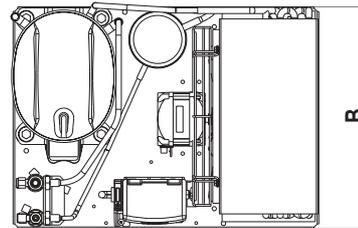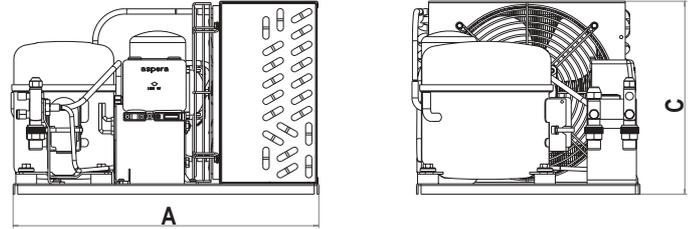



1.955.158 - STANDARD

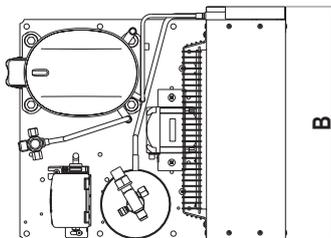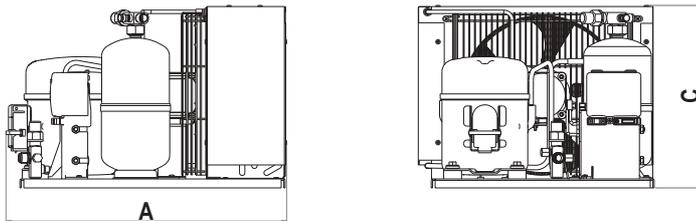



1.955.194 - RESTYLING

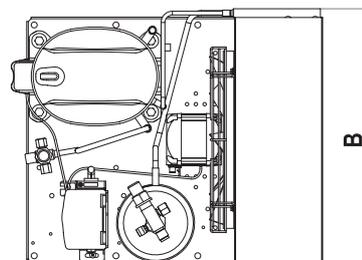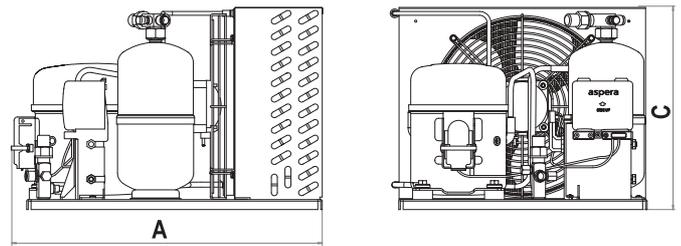

1.955.146 - STANDARD

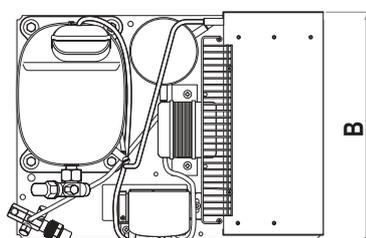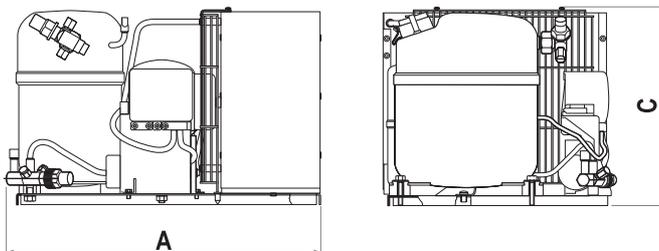


1.955.196 - RESTYLING

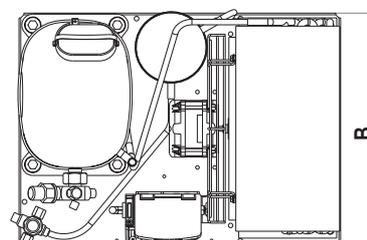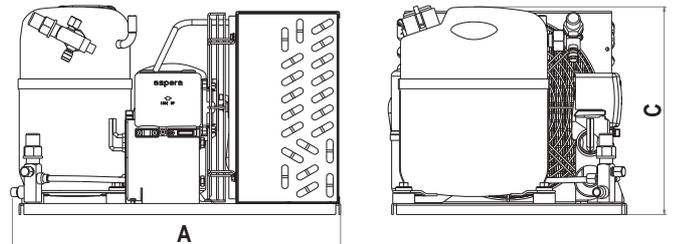


EXTERNAL VIEWS


1.955.151 - STANDARD

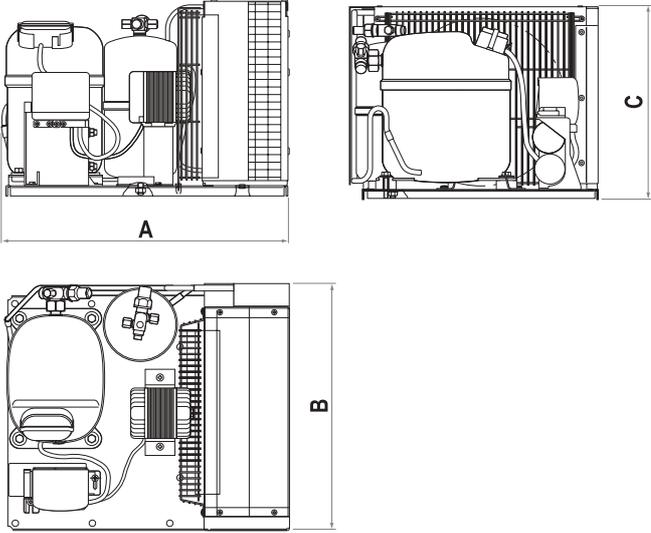


1.955.186 - RESTYLING

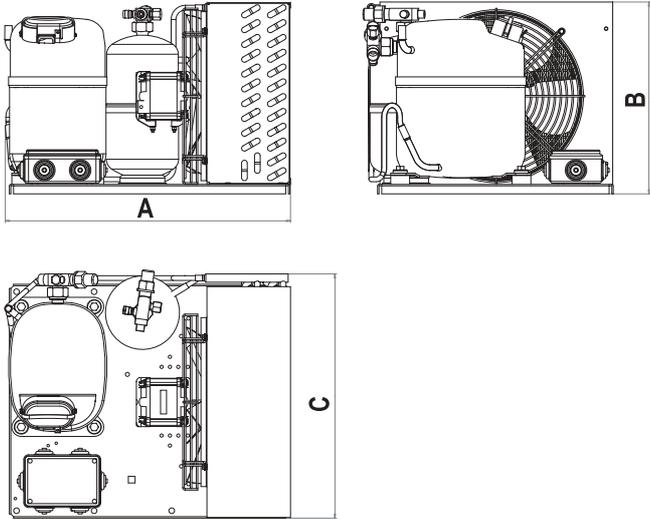


1.955.162 - STANDARD

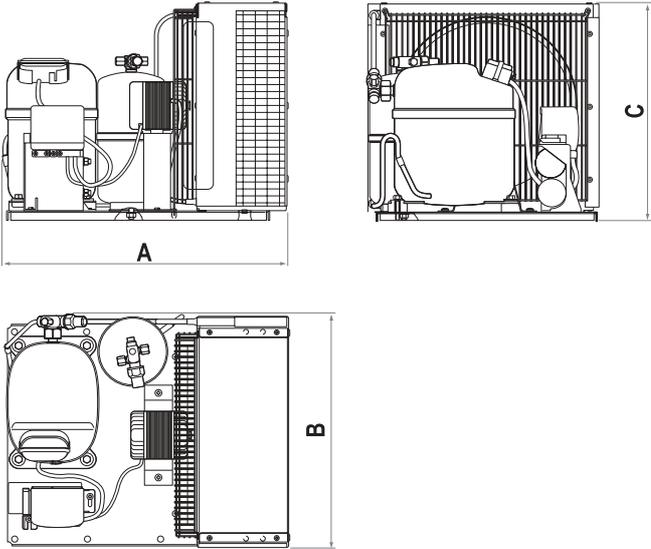


1.955.195 - RESTYLING

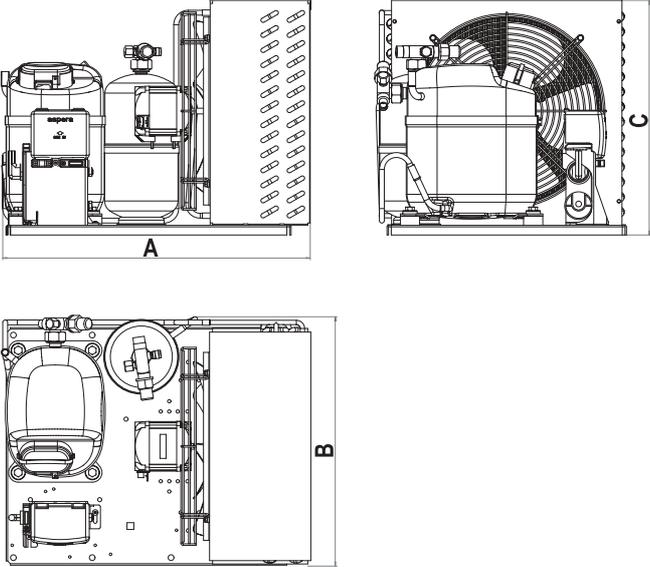

1.955.160 - STANDARD

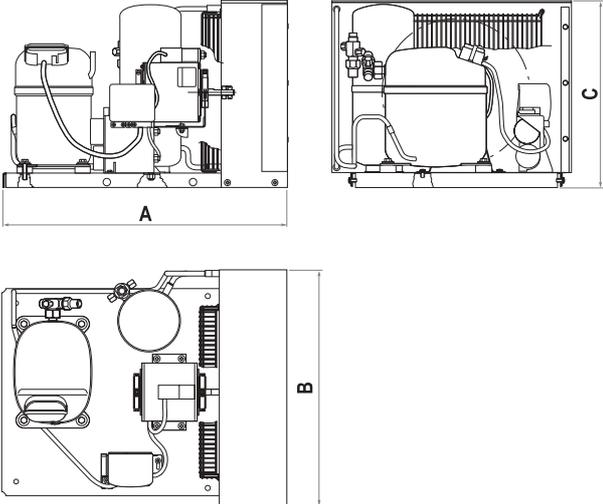


1.955.209 - DOUBLE FAN

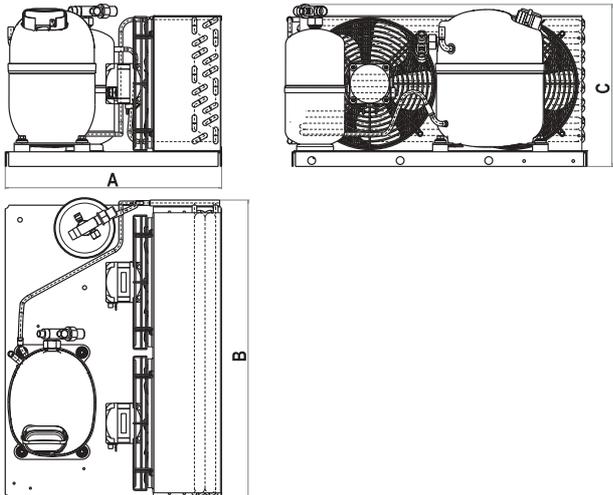


WIRING DIAGRAMS


RSIR Electrical Hookup UT - UNE - UNB

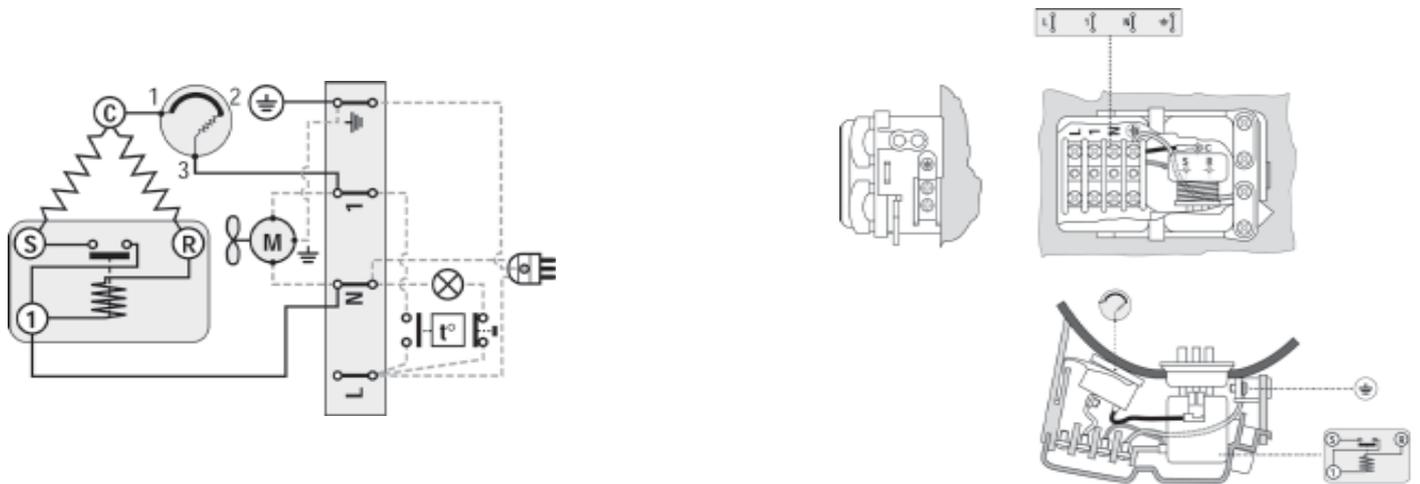

CSIR Electrical Hookup UT - UNE - UNB

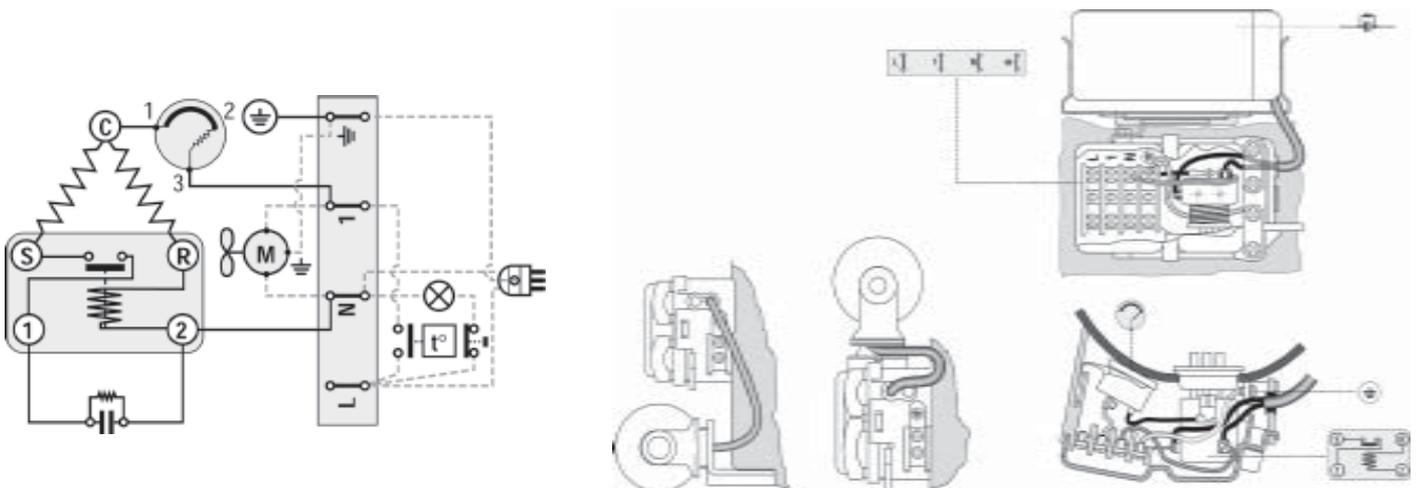


CSR Electrical Hookup UJ - UT - UNE

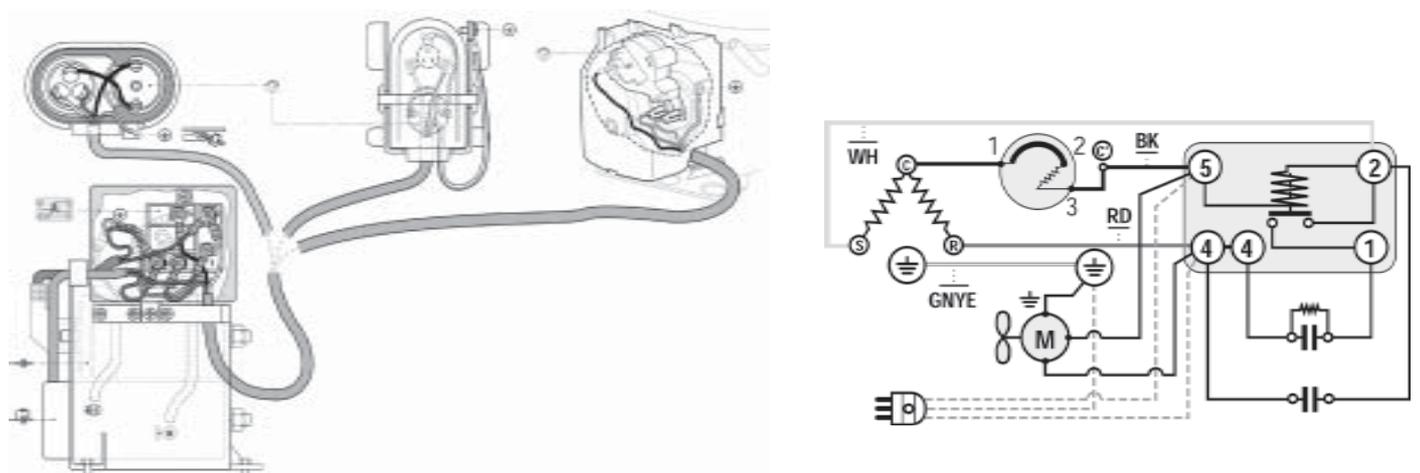


WIRING DIAGRAMS



RSIR Electrical Hookup UNE - UNB

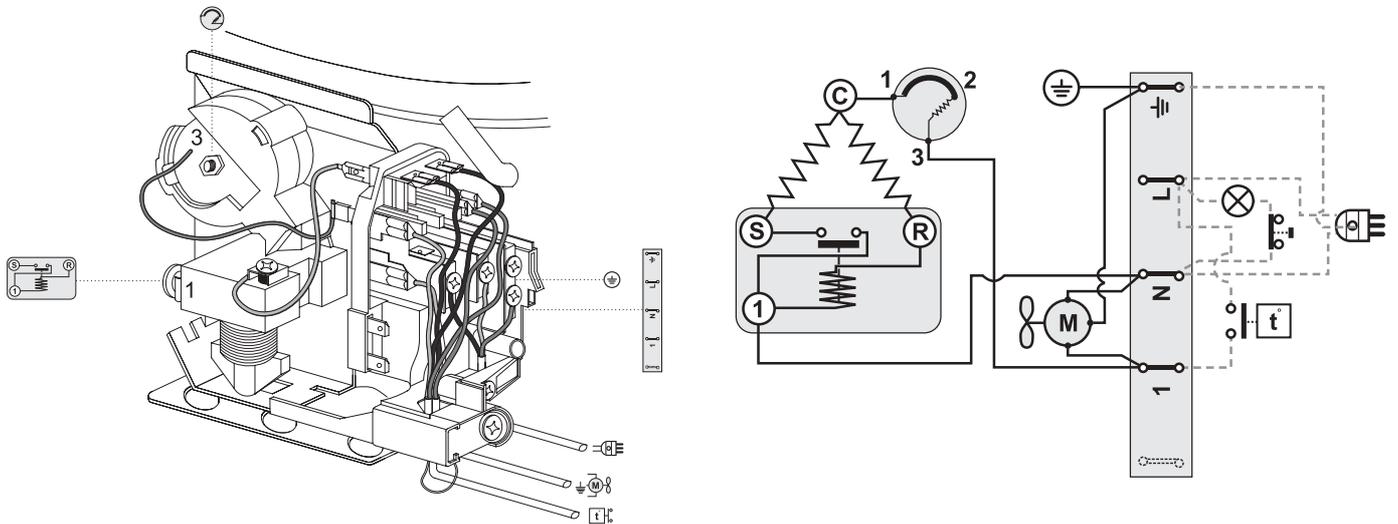



CSIR Electrical Hookup UNE - UNB

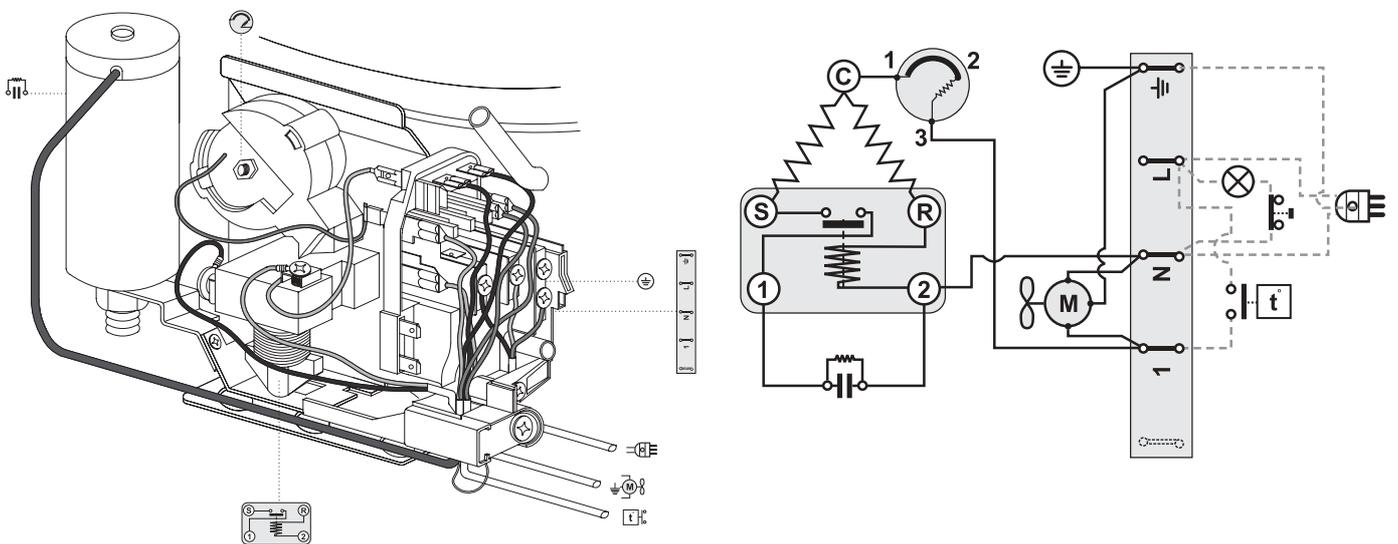

3 PHASE Electrical Hookup UJ

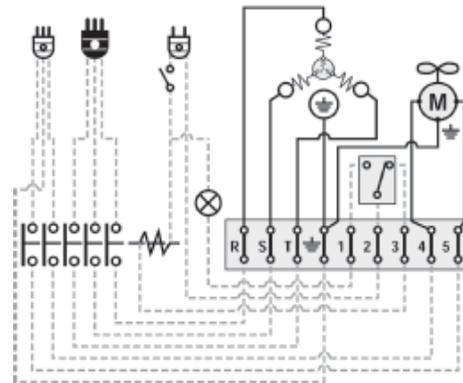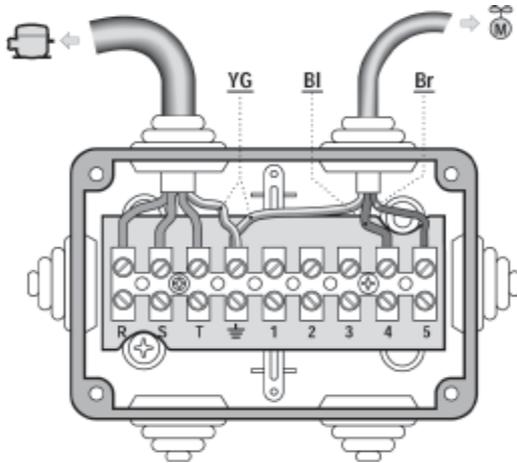

CSIR Electrical Hookup UJ

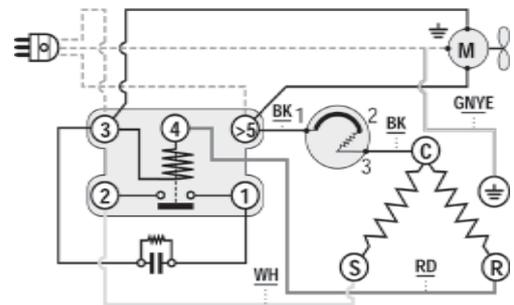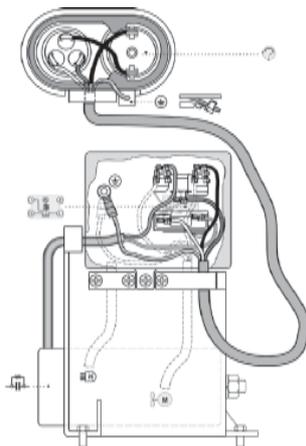


LEGEND

C	Common	R	Run	WH	White	RD	Red
S	Start	C'	Common (internal overload protection)	GNYE	Green - Yellow	BL	Blue
				BK	Black	BR	Brown

Overload protector	Start relay	Start capacitor	Run capacitor	Fan motor	Thermostat	Earth connection	Terminal box	Lamp	Switch	High / Low pressure switch


ROTALOCK VALVES

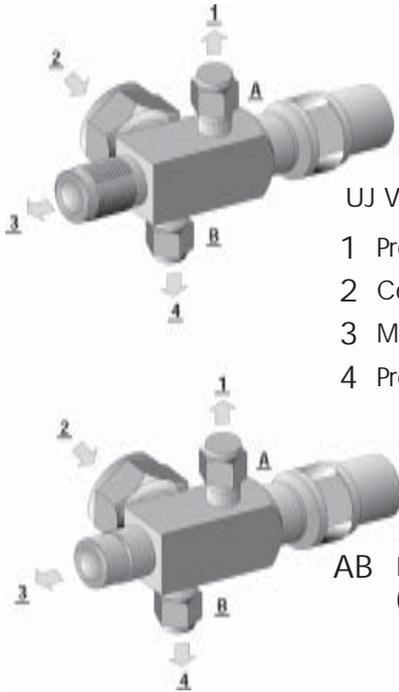

UJ VALVES


- 1 Process and manometer
- 2 Connection to compressor or receiver
- 3 Main connection
- 4 Pressostat port

AB Hexagonal blind nuts
(tightening torque 10.8 16.3 Nm)

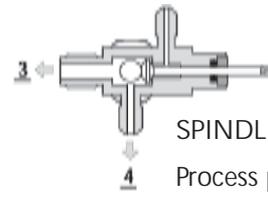


SPINDLE BACK POSITION

Process port closed

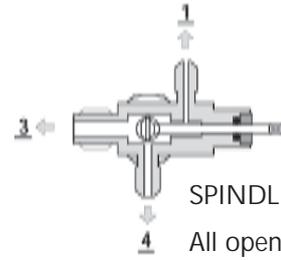

SPINDLE MIDDLE POSITION

All open

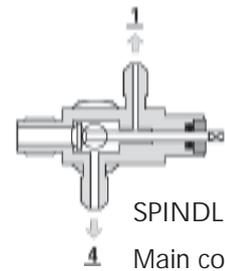

SPINDLE FRONT POSITION


Main connection closed

RECOMMENDED TORQUE


VALVE NOMINAL DIMENSION (SAE)	ORIENTABLE FIXING NUT		SPINDLE TORQUE (Nm)
	THREAD (UNF)	TORQUE (Nm)	
1/4" SAE	N/A	N/A	5.9-7.4
3/8" SAE	N/A	N/A	7.4-9.3
1/2" SAE	1"-14	67-82	9.3-11.3
5/8" SAE	1"-14	67-82	11.3-13.7
3/4" SAE	1"-1/4-12	110-135	13.7-16.2

NOMENCLATURE

CONDENSING UNIT MODEL

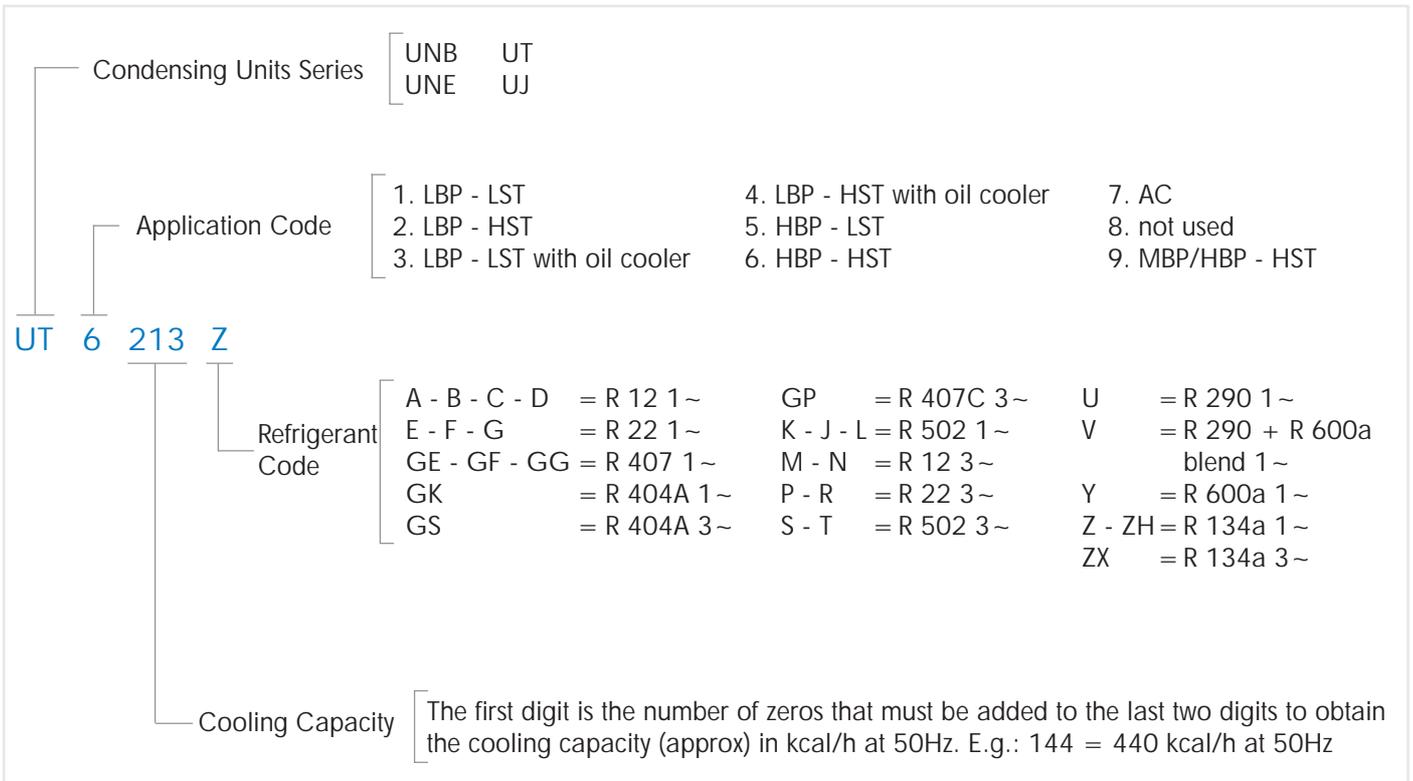

BILL OF MATERIAL

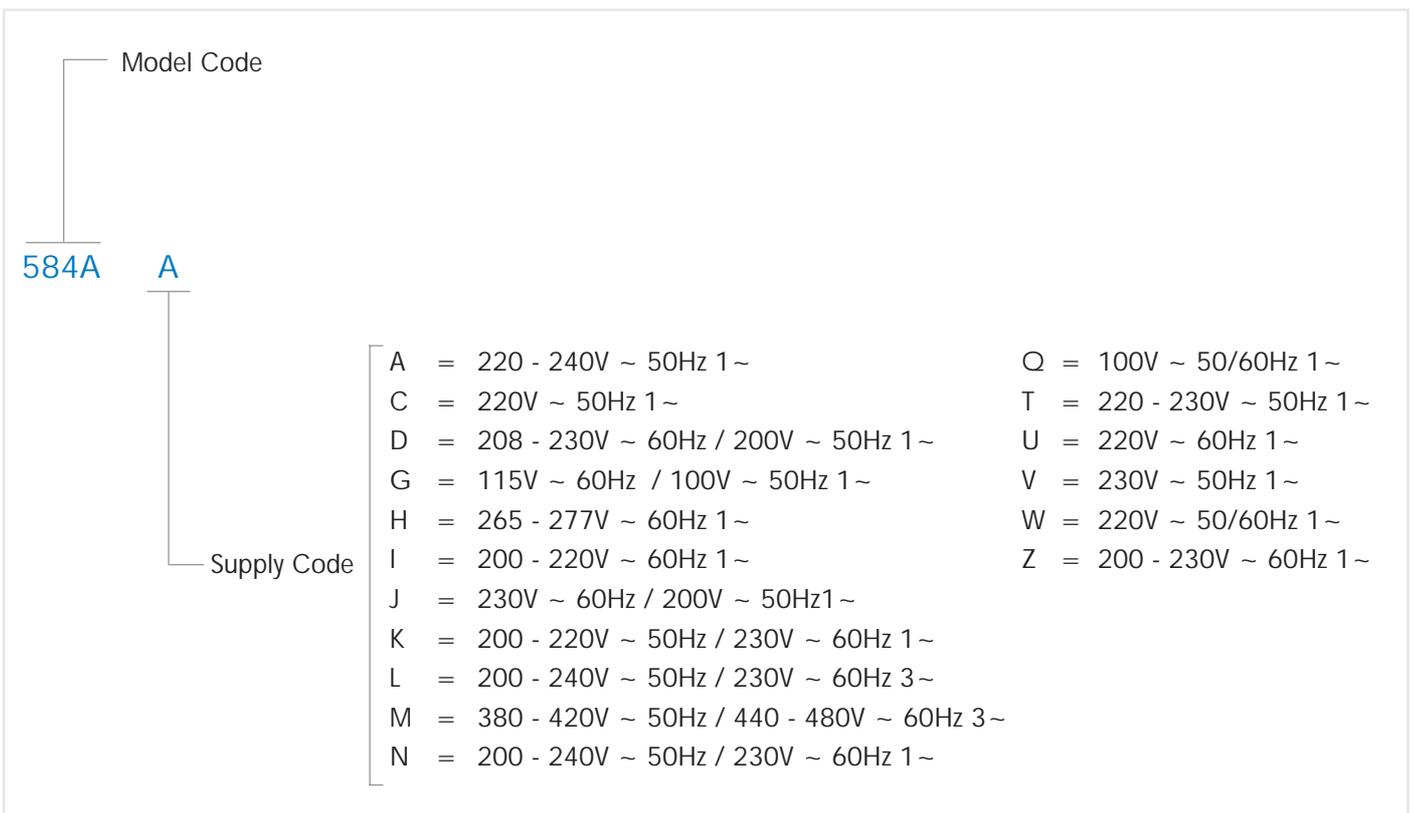



Embraco - Empresa Brasileira de Compressores S.A.

Rui Barbosa, 1020 - P.O. BOX 91
89219-901 - Joinville - SC - Brazil
Phone: + 55 47 441-2121
Fax: + 55 47 441-2780



Embraco Europe S.r.l.

Via Buttigliera 6
10020 - Riva Presso Chieri (Torino) - Italy
P.O. BOX 151 - 10023 Chieri (TO)
Phone: + 39 011 9437-111
Fax: + 39 011 9468-377
+ 39 011 9469-950

Embraco Europe (Sales Office)

Zona Industriale D1 - Via Fratelli Gambino, 7
10023 - Chieri (Turin) - Italy
Phone: + 39 011 9405-611
Fax: + 39 011 9405-656



Embraco Slovakia S.r.o.

Odorinska Cesta, 2 - 052-01
Spisská Nová Ves - Slovakia
Phone: + 421 53 4172-291
+ 421 53 4172-293
Fax: + 421 53 4172-299

Embraco Europe (Sales Office)

Zona Industriale D1 - Via Fratelli Gambino, 7
10023 - Chieri (Turin) - Italy
Phone: + 39 011 9405-611
Fax: + 39 011 9405-656



Embraco North America, Inc.

2232 Northmont Parkway
Duluth, Georgia - USA 30096
Phone: + 1 770 814-8004
+ 1 800 548-9498
Fax: + 1 770 622-4620
+ 1 800 462-1038

Embraco México (Sales Office)

Carretera Miguel Alemán; km 14,2
Parque Alianza de Negocios, Local 21A
Apodaca, Nuevo León - México - 66600
Phone: + 52 81 8029 9604
Fax: + 52 81 8321 3960



Beijing Embraco Snowflake Compressor Company Ltd.

Nº 15, Jia Jia Huayuan, Fengtai District
100075 - Beijing - China
Phone: + 86 10 6725-2244
Fax: + 86 10 6725-6825