

Ø 350 外转子轴流风机 Axial Fans




使用说明:

工作方式: S1
 绝缘等级: B级 F级
 环境温度: -30°C - 60°C

应用范围:

4D-350 380V/50Hz 0-90Pa (20Pa-2090m³/h)
 4E-350 220V/50Hz 0-90Pa (20Pa-1960m³/h)
 4E-350 120V/60Hz 0-90Pa (20Pa-2440m³/h)
 6D-350 380V/50Hz 0-60Pa (20Pa-1170m³/h)
 6E-350 220V/50Hz 0-60Pa (20Pa-1240m³/h)
 6E-350 120V/60Hz 0-60Pa (20Pa-1156m³/h)

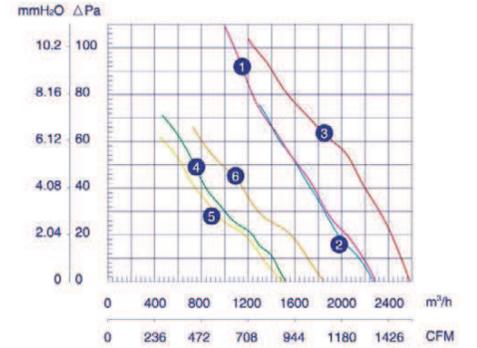

| Model | Model | Model | Model | VOLTAGE 额定电压 V | FREQUENCY 频率 Hz | CURRENT 额定电流 A | INPUT 输入功率 W | SPEED 额定转速 r/min | AIR VOLUME 额定风量 m³/h | CAPACITANCE 电容 μF | NOISE 噪音 dBA | NET WEIGHT 净重 kg | LICENSE 证书 | NO. ON THE CURVE |
|-----------------------|-----------------------|-----------------------|-----------------------|----------------------|-----------------------|----------------------|--------------------|------------------------|----------------------------|-------------------------|--------------------|------------------------|---------------|------------------|
| YWF-4D-350-S-102/34-G | YWF-4D-350-S-102/34-T | YWF-4D-350-S-102/34-B | YWF-4D-350-S-102/34-R | 380 | 50 | 0.38 | 140 | 1380 | 2290 | / | 62 | 5.0 | CCC CE | 1 |
| YWF-4E-350-S-102/34-G | YWF-4E-350-S-102/34-T | YWF-4E-350-S-102/34-B | YWF-4E-350-S-102/34-R | 220 | 50 | 0.85 | 140 | 1380 | 2270 | 4 | 62 | 5.0 | CCC CE | 2 |
| YWF-4E-350-S-102/34-G | YWF-4E-350-S-102/34-T | YWF-4E-350-S-102/34-B | YWF-4E-350-S-102/34-R | 120 | 60 | 1.65 | 180 | 1600 | 2580 | 16 | 62 | 5.0 | CCC CE | 3 |
| YWF-6D-350-S-102/34-G | YWF-6D-350-S-102/34-T | YWF-6D-350-S-102/34-B | YWF-6D-350-S-102/34-R | 380 | 50 | 0.30 | 80 | 920 | 1520 | / | 56 | 5.0 | CCC CE | 4 |
| YWF-6E-350-S-102/34-G | YWF-6E-350-S-102/34-T | YWF-6E-350-S-102/34-B | YWF-6E-350-S-102/34-R | 220 | 50 | 0.40 | 80 | 920 | 1590 | 3 | 56 | 5.0 | CCC CE | 5 |
| YWF-6E-350-S-102/34-G | YWF-6E-350-S-102/34-T | YWF-6E-350-S-102/34-B | YWF-6E-350-S-102/34-R | 120 | 60 | 0.68 | 80 | 1080 | 1840 | 8 | 56 | 5.0 | CCC CE | 6 |

