MGE.R

Pressure Gauges - Art. Mge - Stainless Steel Case (Glycerine) - BOTTOM Dial 80 - 100 - 150 mm



Use

Pressure gauges suitable for all process gaseous and liquid that don't attack copper alloy parts. Intended for adverse service conditions where pulsating or vibration exists. Hydraulics, Compressors.

Description

Pressure gauge made according UNI EN 837.1 norms
- Stainless steel case aisi 304 dial IP65 - Dial 80 - 100 - 150 mm.
- Glycerine filled (ph. 99.5% Vegetal origin)
- aisi 304 bayonet ring
- Polycabonated windows
- BRASS movement and pivot, eccentric BOTTOM execution
- cilindrical (ISO 228) connection - all with 0.5 mm dumpin screw
- Aluminium index
- Aluminium dial White background
- Black BAR scale and Red PSI one (except compoud gauge BAR only)
- Accuracy 1,0% (1,6% on dial 80 mm)

Using range

Working Temperature: -10 +60° C (+14 +140° F)
Working Pressure: Steady 75% - Variable 60% - Overpressure 25% < 60 bar >15% (according EN 837.1)

Models


Normalized range: Vacum -1 / 0 Bar+CmHg;
Compound -1+0,6; -1+1,5; -1+3; -1+5; -1+9; -1+15 BAR only;
0.6; 1; 1,6; 2,5; 4; 6; 10; 16; 25; 40; 60; 100; 160; 250; 400; 600; 1000 Bar + Psi

Options

NPT ANSI B.1.20.1 thread, With or without Glycerin, OXYGEN SERVICE, customize range, scale or logo; Coloured sector; elettric switch

MGE.R

Available sizes

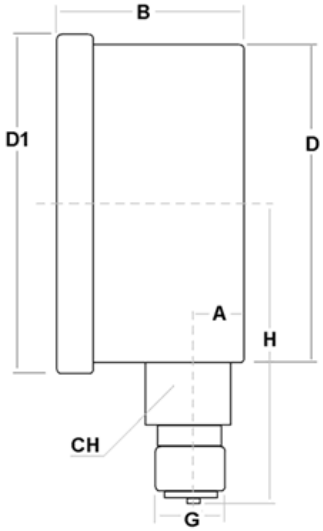

VAR	A	B	D	D1	H	G	CH	Kg	Lotto
100	10,5	39	99,1	110,5	81,3	1/2" BSP	22	0,650	20
150	15	48,5	148,7	161,5	111,5	1/2" BSP	22	1,100	10

Picture, dimensions and features could change at any time

Ultimo aggiornamento: 14/07/2025