MGE.F

Pressure Gauges - Art. Mge - Stainless Steel Case (Glycerine) - FLANGED Dial 80 - 100 - 150 mm



Use

Pressure gauges suitable for all process gaseous and liquid that don't attack copper alloy parts. Intended for adverse service conditions where pulsating or vibration exists. Hydraulics, Compressors.

Description

Pressure gauge made according UNI EN 837.1 norms
- Stainless steel case aisi 304 dial IP65 - Dial 80 - 100 - 150 mm.
- Glycerine filled (ph. 99.5% Vegetal origin)
- aisi 304 bayonet ring
- Polycabonated windows
- BRASS movement and pivot, eccentric BACK execution with FLANGE for panel campling
- cilindrical (ISO 228) connection - all with 0.5 mm dumpin screw
- Aluminium index
- Aluminium dial White background
- Black BAR scale and Red PSI one (except compoud gauge BAR only)
- Accuracy 1,0% (1,6% on dial 80 mm)

Using range

Working Temperature: -10 +60° C (+14 +140° F)
Working Pressure: Steady 75% - Variable 60% - Overpressure 25% < 60 bar >15% (according EN 837.1)

Models

Normalized range: Vacum -1 / 0 Bar+CmHg;
Compound -1+0,6; -1+1,5; -1+3; -1+5; -1+9; -1+15 BAR only;
0.6; 1; 1,6; 2,5; 4; 6; 10; 16; 25; 40; 60; 100; 160; 250; 400; 600; 1000 Bar + Psi


Options

NPT ANSI B.1.20.1 thread, With or without Glycerin, OXYGEN SERVICE, customize range, scale or logo; Coloured sector; elettric switch

BART S.r.l - Via Pietro Magistretti, 9 - 20128 Milano (Italia) Tel. +39.02.27206577 - Fax +39.02.25902084 - info@bart-e.com

MGE.F

Available sizes

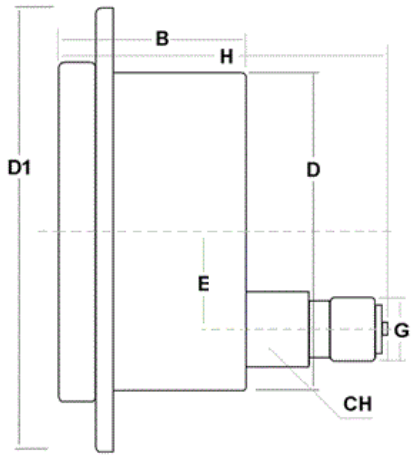

VAR	B	D	D1	E	H	G	CH	Kg	Lotto
dn 80	38	75	105	--	69	1/4" BSPP	14	0,450	50
dn 100	38	98,5	129	19	82	1/2" BSPP	22	0,790	20
dn 150	48	149	175	25,5	92	1/2" BSPP	22	0,875	10

Picture, dimensions and features could change at any time

Ultimo aggiornamento: 14/07/2025