


Scotchcast®

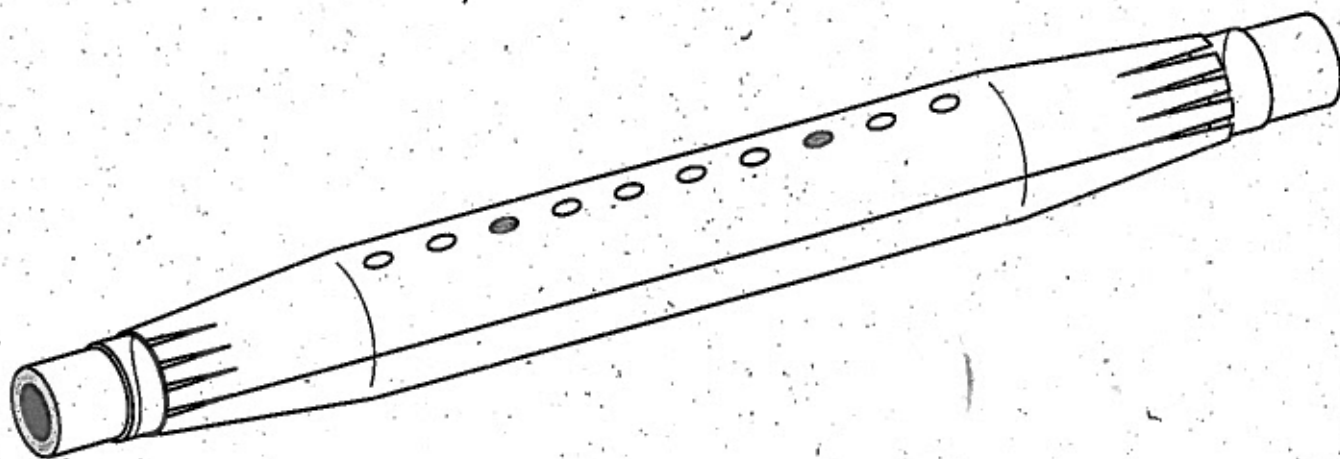

Select the kit according to the outer diameter of the cable

Kit Reference	Outer Cable Diameter		Cross Section mm ²	A	L ₁	L ₂	L ₃	L ₄
	min	max						
91-AV 160	40	63	4 x 35 to 4 x 50	360	285	215	145	75
91-AV 170	47	80	4 x 50 to 4 x 120	520	410	310	210	110

3M Deutschland GmbH

Issue:

2

Issue date:

09.09.2010

Please note: This product may only be assembled by trained specialized personnel according to these assembly instructions. The preceding specifications are the result of in-depth research. They correspond to the state of our experience. A test by you will convince you of the excellent properties of the 3M products. Verify yourself whether these products are suitable for your purposes. All questions regarding a warranty liability are governed by our terms of sale, unless legal provisions provide differently.

Scotchcast®
Flexible Joint and Repair Kit

91-AV 160 (EP)
91-AV 170 (EP)

Suitable for Polymeric
and Trailing Cables 0.6/1 kV

AABBCC62630

1. Issue date: 10.01.08

Language: English

1. Change date: 09.09.10

Drawn: R. Wessel

2. Change date:

Checked: M. Petry

3. Change date:

4. Change date:

3M Electrical Products

XE-0091-1972-0