

DS-2CD2T22-15

DS-2CD2T32-15



The Hikvision DS-2CD2T22-15 is a 2 megapixel (1920 x 1080) and the DS-2CD2T32-15 is a 3 megapixel (2048 x 1536) both are 4mm lens. The cameras have built in IR with a range of up to 50m and are housed in an IP66 rated housing. Some of the great features include dual streaming for high definition onsite recording as well as fluid off site streaming, True day/ night switching and digital wide dynamic range. The cameras can be powered over ethernet (PoE) for quick and easy installation when used with the plug and play features of our Hikvision NVRs.

FEATURES:

- 2 or 3 Megapixel high resolution
- Full HD 1080p real-time video
- DWDR & 3D DNR
- EXIR illuminators: up to 50m
- IP66
- PoE (Max 7W)
- Bracket included


Bracket

DS-1280ZJ-S
Junction box
137 x 51.5mm



Dimensions

Unit: mm (inch)

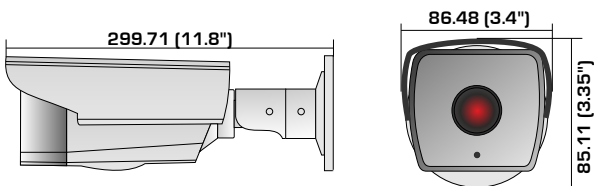

	DS-2CD2T22-15	DS-2CD2T32-15
CAMERA		
Image Sensor	1/3" Progressive Scan CMOS	
Min. Illumination	0.01 Lux @ (F1.2,AGC ON), 0 Lux with IR	0.07 Lux @ (F1.2,AGC ON), 0 Lux with IR
	0.014 Lux @ (F1.4,AGC ON), 0 Lux with IR	0.1 Lux @ (F1.4,AGC ON), 0 Lux with IR
Shutter Time	1/3 s to 1/100,000 s	
Lens	4 mm @ F2.5 Angle of view: 80°	4 mm @ F2.5 Angle of view: 76.5°
Lens Mount	M12	
Day & Night	ICR	
Digital Noise Reduction	3D DNR	
Wide Dynamic Range	Digital WDR	
COMPRESSION STANDARD		
Video Compression	H.264 / MJPEG	
H.264 Codec Profile	BaseLine Profile / Main Profile	
Bit Rate	32 Kbps ~ 12 Mbps	
Dual Stream	Yes	
IMAGE		
Max. Image Resolution	1920 x 1080	2048 x 1536
Image Settings	Rotate mode, Saturation, Brightness, Contrast adjustable by client software or web browser	
Backlight Compensation	Yes, zone optional	
ROI	Yes, up to 4 configurable areas	
NETWORK		
Network Storage	NAS	
Alarm Trigger	Motion detection, tampering alarm, scene change detection, face detection, intrusion detection, Line crossing detection	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour	
System Compatibility	ONVIF, PSIA, CGI, ISAPI	
General Functionalities	User Authentication, Watermark, IP address filtering, Anonymous access	
INTERFACE		
Communication Interface	1 RJ45 10M / 100M Ethernet interface	
Onboard Storage	Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB	
GENERAL		
Operating Conditions	-30 °C ~ 60 °C (-22°F ~ 140 °F) humidity 95% or less (non-condensing)	
Power Supply	12 VDC ± 10% , PoE (802.3af)	
Power Consumption	max. 7W	
Ingress Protection Level	IP66	
IR Range	2pcs EXIR LEDs, up to 50m	
Dimensions	Ø105mm x 299.71mm (4.13" x 11.8")	
Weight	1200g	