

MOTOR RUN CAPACITOR


Application

Apply to 50/60Hz A.C single-phase motor for starting and running. Widely used for micro water pump, cleaning machine, washing machine and air compressor etc.



JY-MOTOR RUN CAPACITOR

FOR MOTOR

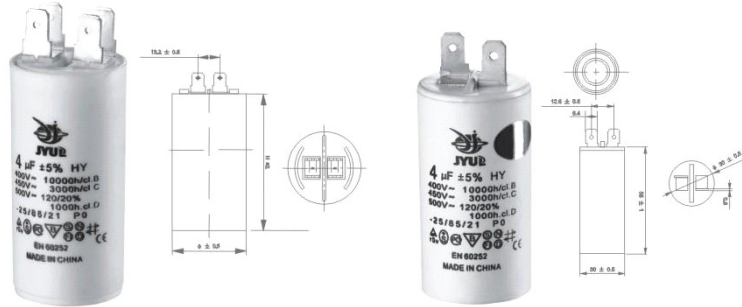

产品特点:

- 该电容器采用锌边缘加厚聚丙烯薄膜或网状安全膜为介质，阻燃环氧树脂封装而成外形为圆柱形具有高可靠性和高稳定性。

Product character:

- This capacitor use polypropylene film or reticulation safety film (coated by Zinc and Aluminum) as a dielectric encapsulated by retardant epoxy resin, with cylinder shape, high quality and good stability.

用途:

- 用于50/60Hz交流单相电机的启动和运转，广泛用于微型水泵、洗衣机、清洗机和空压机等。

Application:


- Apply to 50/60Hz A.C single-phase motor for starting and running. Widely used for micro water pump, cleaning machine, washing machine and air compressor etc.

技术参数 Technical Data

执行标准 Performance standard	GB/T3667.1-2005/ IEC60252-1:2001
气候类别 Climate types	25/70/21
容量偏差 Capacitance tolerance	±5%
绝缘电阻 Insulation resistance	≥3000MΩ. μ F
损耗角正切 Loss Tangent	Tg δ ≤0.002 (50Hz-100Hz)
耐压T-T Endurable voltage (T-T)	施加2倍的工作电压2秒钟无击穿 2times working voltage, no breakdown within 2 seconds

Dimensions(mm)

Capatitance (μ F)	250V	450V
	DXH (mm)	
1	25×65/30×50	
1.5		
2		
2.5		
3		
4		
5	30×60	
6		
7	30×60	35×60
8		
9		
10		
11		
12	35×60/35×70	
12.5	35×60	35×70
13		
14		
15		
16		
17		
18		
20	40×70	
22	35×70	45×70/40×93
25		
27		
30	40×70	40×93/45×93
31.5		
35	45×93	
40	45×93	50×92
45		
50		
55		
60		
65		
70	50×120/55×120	
75	55×120	
80	55×120/60×120	
85	50×92	60×120
90		
100	50×100	65×130
120		
130	50×120	
150		

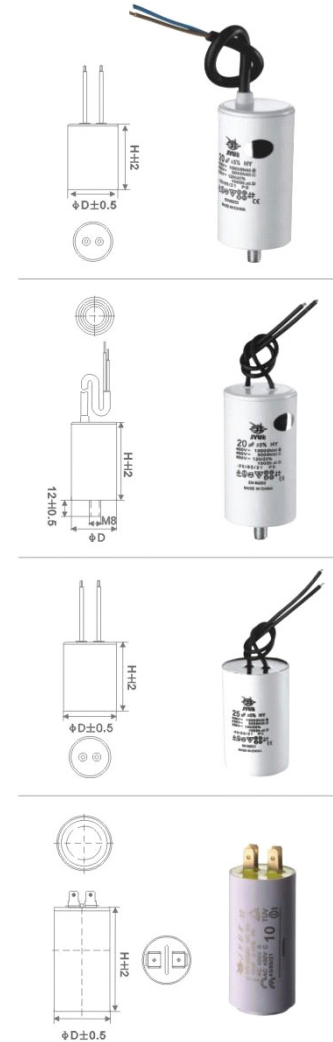

备注: 可根据客户要求的规格生产

Remarks: The specifications can be according to clients requests.

JY-MOTOR RUN CAPACITOR

FOR WASHING MACHINES

Products Overall Dimension

产品特点:

- 该电容器采用锌边缘加厚聚丙烯薄膜或网状安全膜为介质阻燃环氧树脂封装而成外形为圆柱形，具有高可靠性和高稳定性。

Product character:

- This capacitor use polypropylene film or reticulation safety film (coated by Zinc and Aluminum) as a dielectric encapsulated by retardant epoxy resin, with cylinder shape, high quality and good stability.

用途:

- 广泛用于各类洗衣机。

Application:

- Widely used for washing machine .

技术参数 Technical Data

执行标准 Performance standard	GB/T3667.1-2005/ IEC60252-1:2001
气候类别 Climate types	25/70/21
容量偏差 Capacitance tolerance	± 5%
绝缘电阻 Insulation resistance	≥ 3000MΩ · μ F
损耗角正切 Loss Tangent	Tg δ ≤ 0.002 (50Hz-100Hz)
耐电压T-T Endurable voltage (T-T)	施加2倍的工作电压2秒钟无击穿 2times working voltage, no breakdown within 2 seconds

Dimensions(mm)

Voltage (VAC)	Capacitance (μ F)	D × H (mm)
250-450	10+4	40 × 90
	10+5	40 × 90
	12+4	50 × 100
	12+5	50 × 100

备注: 可根据客户要求的规格生产 Remarks: The specifications can be according to clients requests

