


## PRODUCT DATA SHEET

**PRODUCT NAME:**

**EVOLUTION**

### PRODUCT STRUCTURE

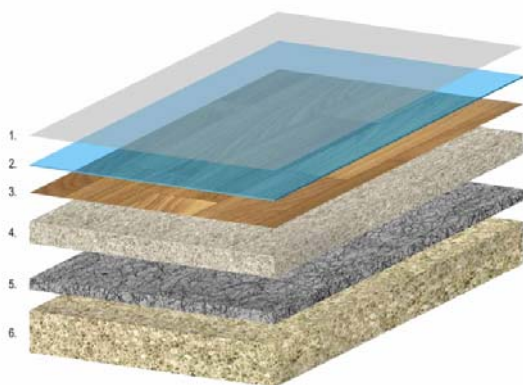

1. additional coat-EXTREME protection  
dodatna zaštita-EXTREME lak
2. wear layer  
zaštitni transparentni sloj
3. design colour  
štampa dezena
4. intermediate foam layer  
penasti međusloj
5. saturant layer reinforced by glass flies  
kompaktni premaz ojačan staklenim flisom
6. back coat-foam layer  
poledinski penasti sloj

### TECHNICAL/MARKETING PRODUCT CHARACTERISTIC

Resilient Residential PVC floor covering, EN 653	standard	EVOLUTION
<b>Classification, EN 685</b>	<b>22</b>	
<b>Product characteristics</b>		
Overall thickness, mm	EN 428	<b>2,7</b>
Wear layer thickness, mm	EN 429	<b>0,20</b>
Total mass, g/m <sup>2</sup>	EN 430	<b>1750</b>
Surface treatment-additional PU protection		<b>Extreme</b>
<b>Marketing characteristics</b>		
Roll length, m	EN 426	<b>33 (15-33)</b>
Widths required, m	EN 426	<b>2,5 / 3 / 3,5 / 4</b>
Branded		<b>Tarkett</b>
Back printing		<b>yes</b>
Back embossing		<b>no</b>
Guarantee, year		<b>15</b>
<b>Installation method</b>		
Loose lay		<b>≤ 20 m<sup>2</sup></b>
Adhesive		<b>&gt; 20 m<sup>2</sup></b>
Welding		<b>cold</b>
Underfloor heating		<b>suitable</b>

## TARGET PRODUCT CHARACTERISTICS

	Standard	unit	value
<b>Surface characteristics</b>			
Scratch resistance	internal		<b>excellent</b>
Stain resistance	EN 423		<b>excellent</b>
Alkali resistance	EN 423	pH	<b>12</b>
Castor chair	EN 425		<b>very good</b>
Simulated movement of a furniture leg resistance	EN 424		<b>excellent</b>
Target gloss	internal	%	<b>22</b>
<b>Physical performance</b>			
Indentation	EN 433	mm	<b>0,8-1,6</b>
Residual indentation	EN 433	mm	<b>&lt; 0,35</b>
Resilient indentation	EN 433	%	<b>&gt; 85</b>
Wear resistance	prEN 660-1	group	<b>T</b>
Impact resistance	internal		<b>very good</b>
Tear resistance	internal		<b>very good</b>
Curl	EN 434	mm	<b>&lt; 1,0</b>
Light fastness (blue scale)	EN 20105 B02		<b>7/8</b>
Electrical resistance	Pr EN 1081		<b>neutral</b>
Dimensional stability	EN 434	%	<b>&lt; -0,05 lw &lt; -0,02 cw</b>
Sound absorption	EN ISO 717-2	dB	<b>18</b>
Heat insulation	DIN 52612	m <sup>2</sup> K/W	<b>0,03-0,04</b>
Water absorption	EN 661	g/100cm <sup>2</sup>	<b>0,04</b>
Fire resistance	EN 13501-1	class	<b>Cfl-s1</b>