


EAO – Your Expert Partner for Human Machine Interfaces

51-253.022 - Stop switch complete

51-253.022 - Stop switch complete

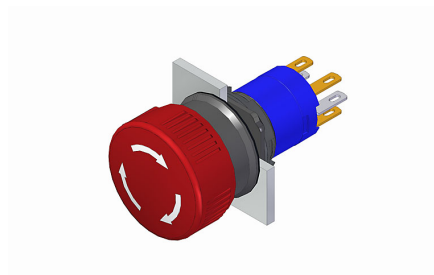

Attention: The preview is based on a sample product. This can differ from your current configuration.

Mounting

Mounting cut-out	Ø 16 mm
Design	raised

Front

Front dimension	Ø 24.5 mm
Front shape	round

Other Attributes

Weight	0.011 kg
--------	----------

Operating-/Indication part

Lens material	Plastic
Lens colour	red
Lens profile	Mushroom
Lens optics	opaque

IP-Rating

Front protection	IP 65
------------------	-------

Connection Method

Terminal	Solder 2.8 x 0.5 mm
----------	---------------------

Actuator

Switching action	Maintained
------------------	------------

Switching element

Switching system	Snap-action switching element
Contacts	1 NC + 1 NO
Switching current	5 A
Contact material	Gold
Switching voltage	250 V AC


Function

Stop switch

EAO – Your Expert Partner for Human Machine Interfaces


51-253.022 - Stop switch complete

Dimensions




H = Universal terminal 2.0 x 0.5 mm

Mounting cut-outs



Wiring diagram



Additional information

Marking arrows

If the anti-twist ring is not used the panel thickness increases to 4 mm

Legend

Contacts: NC = Normally closed, NO = Normally open

Switching action: C = Maintained