

Kreiselpumpen aus Kunststoff

Plastic Circulation Pumps





AQUA Master



AQUA TECHNIX

Stärken dieser Pumpe +++
 Selbstansaugend +++ Aufstellbar oberhalb
 und unterhalb des Wasserniveaus jeweils
 max. 3 m +++ große Fördermenge bis
 38 m³/h bei 6 mWS +++ geringe Motor-
 leistung +++ Servicefreundliche Konstruk-
 tion +++ Verschleißarme Werkstoffe +++
 Hohe Standzeiten +++ Elektrische Trennung
 zwischen Schwimmbadwasser und Motor
 +++ Verschraubungen an Saug- und Druck-
 seite +++ Extrem großer Fasernfänger
 +++ Vorfilterdeckel ohne Werkzeug zu
 öffnen +++

Strengths/Advantages of this pump +++
 self-priming +++ installation below or above
 water level each max. 3 m +++ high flow
 rate up to 38 m³/h with 6 mWS +++ low motor
 output +++ ease of servicing +++ materials
 resistant to wear +++ extended service life
 +++ electrical separation between pool
 water and motor +++ screw threaded fitting
 at inlet and outlet +++ huge strainer basket
 +++ strainer tank lid opens without tool +++

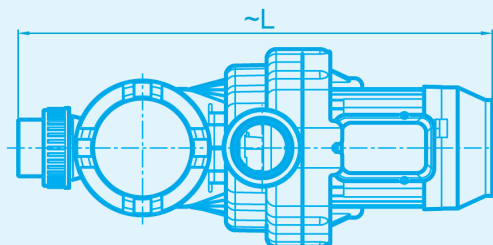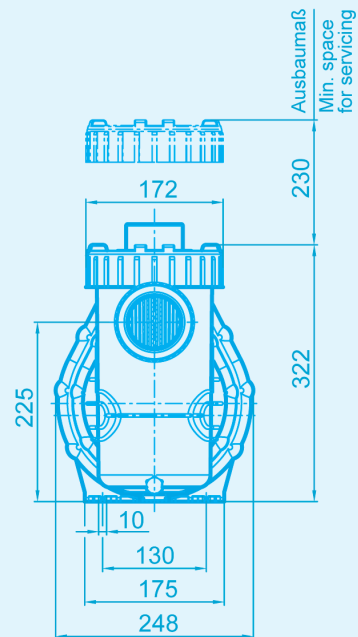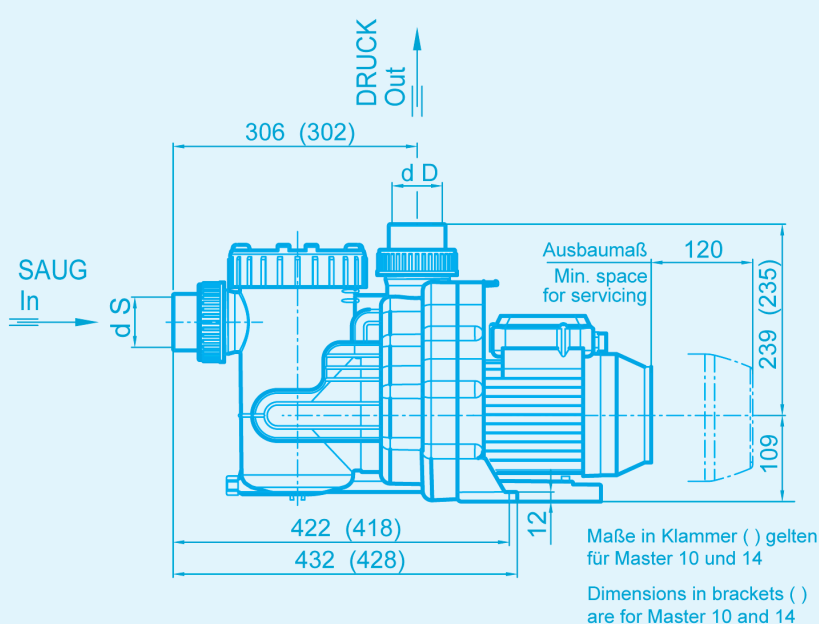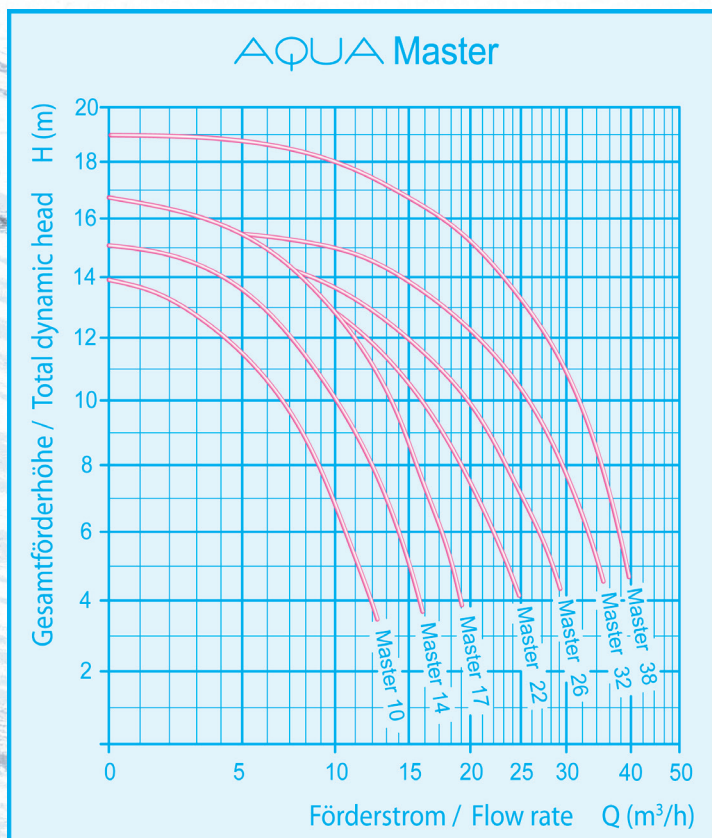

Typ AQUA	1 ~	3 ~	dS Saug/ dS Inlet	dD Druck/ dD Outlet
Master 10	568	591	50	50
Master 14	568	591	50	50
Master 17	597	596	63	63
Master 22	595	615	63	63
Master 26	625	645	63	63
Master 32	625	651	63	63
Master 38	652	632	63	63

AQUA TECHNIX