




Kolorarc[™] Tubular Clear KRC400/T/H/960/E40 30052

Product information

High brightness, high quality white light with good colour rendition and energy efficiency makes GE Metal Halide lamps suitable for many commercial and industrial interiors, particularly in high ceiling areas.

Application areas






Street and pedestrian



🕪 Commercial areas









Product data

Cap/Base	E40
Bulb Shape	Tubular
Bulb Finish	Clear
Maximum Overall Length [mm]	270
Light Center Length [mm]	175
Net weight per piece [g]	168
Gross weight per piece [g]	212
Operating position	H45 - Horiz 45 degrees
Mercury Content [mg]	31.967
UV radiance	Exempt
Brand	General Electric (GE)

Performance data

Colour Code	960
Colour Rendering Index (CRI) [Ra]	90
Nominal correlated colour temperature (CCT) [K]	6000
Nominal lumens [lm]	27000
Rated Lumens [lm]	26050
Nominal efficacy [LpW]	68
Rated efficacy [LpW]	68.5
Energy efficiency class (EEC)	A
Nominal chromaticity coordinate X	0.32
Nominal chromaticity coordinate Y	0.33
Weighted energy consumption [kWh/1000h]	418.43





Electrical data

Nominal power [W]	400
Rated power [W]	380.4
Nominal lamp voltage [V]	118
Lamp Current [A]	3.5
Design Ambient Temperature [°C]	25
Run-up time (sec)	180
Hot restart time (sec)	600
Ballast Required	Yes


Logistic data

DUN Code	19004102300523
EAN Code	9004102300526
Pack Quantity	12
Inner pack type	SLEEVE
Layer quantity	216 EUR, 264 UK
Layer quantity EUR	216
Layer quantity UK	264
Pallet quantity EUR (PC)	648
Pallet quantity UK (PC)	792
Outer case size	320 x 250 x 370 (mm)






Lumen maintenance data

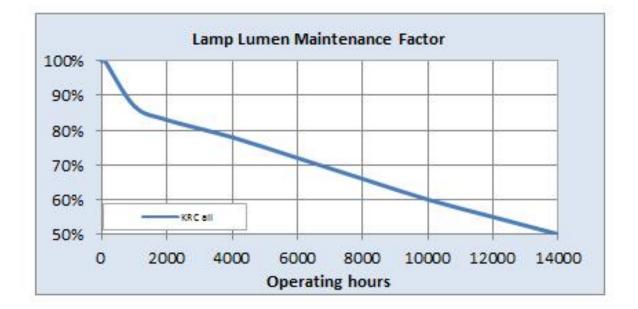

Survival data

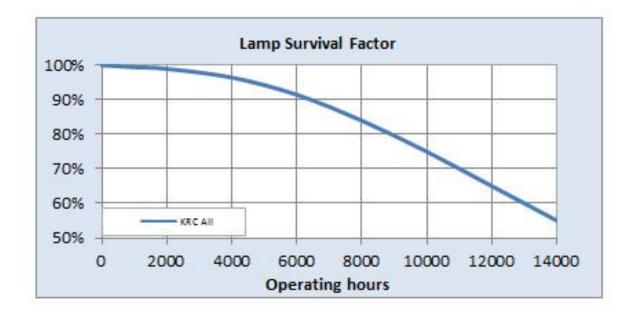





Downloads & Links

Go to the catalog site (HTTP)

HID Lamps Spectrum Catalogue (EN) (PDF)

Kolorarc™ Data sheet (PDF)

Lighting design tools & calculators (HTTP)

High-res images / Technical drawings (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)