

Kolorarc™ Tubular Clear KRC400/T/VBU/960/E40

30704

Product information

High brightness, high quality white light with good colour rendition and energy efficiency makes GE Metal Halide lamps suitable for many commercial and industrial interiors, particularly in high ceiling areas.

Application areas



Road and tunnel



Street and pedestrian



(🎶) Commercial areas









Product data

Cap/Base	E40
Bulb Shape	Tubular
Bulb Finish	Clear
Maximum Overall Length [mm]	270
Light Center Length [mm]	175
Net weight per piece [g]	169
Gross weight per piece [g]	211
Operating position	VBU - Vert Base Up
Mercury Content [mg]	9.96
UV radiance	Exempt
Brand	General Electric (GE)

Performance data

Colour Code	960
Colour Rendering Index (CRI) [Ra]	82
Nominal correlated colour temperature (CCT) [K]	6000
Nominal lumens [lm]	25000
Rated Lumens [lm]	26520
Nominal efficacy [LpW]	71
Rated efficacy [LpW]	72.1
Energy efficiency class (EEC)	А
Nominal chromaticity coordinate X	0.33
Nominal chromaticity coordinate Y	0.34
Weighted energy consumption [kWh/1000h]	404.76





Electrical data

Nominal power [W]	400
Rated power [W]	368
Nominal lamp voltage [V]	122
Lamp Current [A]	3.5
Design Ambient Temperature [°C]	25
Run-up time (sec)	180
Hot restart time (sec)	600
Ballast Required	Yes


Logistic data

DUN Code	0
EAN Code	43168307048
Pack Quantity	12
Inner pack type	SLEEVE
Outer pack type	OUTER BOX
Layer quantity	1 EUR
Layer quantity EUR	1
Pallet quantity EUR (PC)	648
Outer case size	325 x 245 x 374 (mm)






Lumen maintenance data

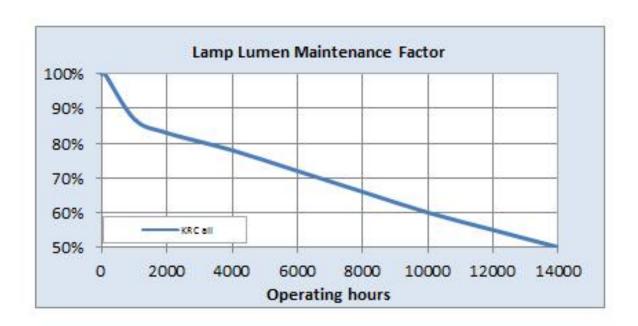

Survival data

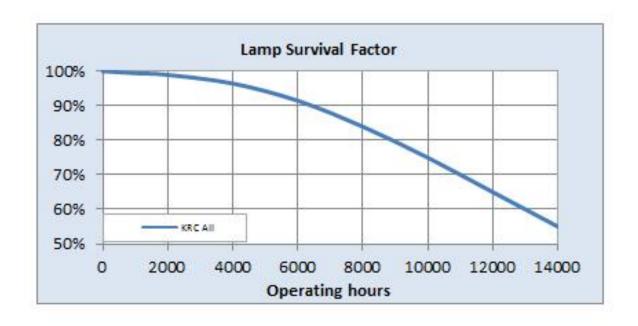





Kolorarc™ Tubular Clear KRC400/T/VBU/960/E40

30704

Downloads & Links

Go to the catalog site (HTTP)

HID Lamps Spectrum Catalogue (EN) (PDF)

Kolorarc™ Data sheet (PDF)

Lighting design tools & calculators (HTTP)

High-res images / Technical drawings (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)