



## 型号说明 Ordering Information

IRS-101-1A3D-R/B



## 技术特性 Specification

1. 规格 Rating: 20A 125VAC; 15A 250VAC; 35A 12VDC
2. 接触电阻 Contact Resistance: 35mΩ max
3. 绝缘电阻 Insulation Resistance: 500VDC 100MΩ min
4. 耐电压 Dielectric Strength: 1500VAC, 1Minute
5. 操作温度 Operating Temperature: -25°C ~ +85°C
6. 电气寿命 Electrical Life: 10,000 Cycles


### 电路特性 Circuitry trait

01	ON	—	OFF
02	ON	—	ON
11	(ON)	—	OFF
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)


( ): 回弹指示 Indicates Momentary

### 盖帽颜色 Cap color 基座颜色 Base color 盖帽种类 Cap options

黑 Black (B)	白 White (W)	黑 Black (B)
红 Red (R)	黄 Yellow (Y)	白 White (W)
绿 Green (G)	蓝 Blue (BL)	灰 Gray (GR)
桔黄 Orange (O)	灰 Gray (GR)	

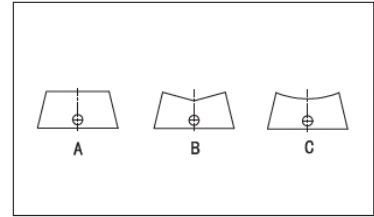

### 盖帽标记 Cap marking

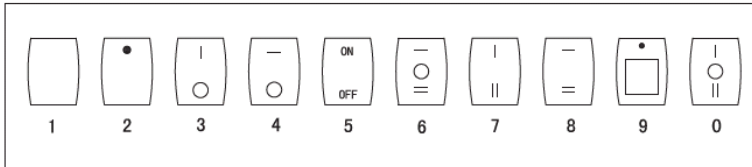

### 防水罩 Water proof cap



RS-101-1C ON-OFF  
 RS-111-1C (ON)-OFF  
 SPST 2P

