


DS-2CD2052(F)-I

5MP IR Mini Bullet network camera

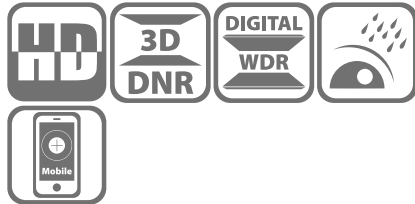


Key features

- Up to 5MP high resolution
- Intrusion & line crossing detection
- On-board storage(optional)
- Up to 30m IR range
- DWDR
- Metallic housing, IP66
- Cloud P2P mobile surveillance

Available Models

DS-2CD2052-I

Dimension

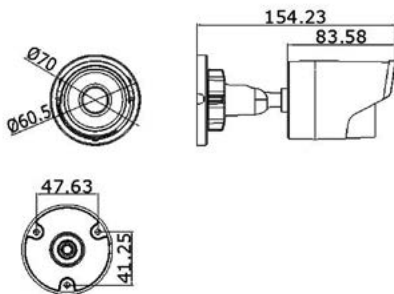

Unit: mm

Accessories



Junction Box
DS-1280ZJ-XS

DS-2CD2052(F)-I

| Camera | |
|----------------------|--|
| Image Sensor | 1/3" Progressive Scan CMOS |
| Min. Illumination | 0.01Lux @ (F1.2, AGC ON), 0 Lux with IR |
| Shutter Speed | 1/3 s to 1/10,000 s |
| Lens | 4mm (6mm option) @ F2.0 |
| Lens Mount | M12 |
| Day & Night | IR cut filter with auto switch |
| DNR | 3D DNR |
| Wide Dynamic Range | DWDR |
| Compression Standard | |
| Video Compression | H.264+/H.264 / MJPEG |
| H.264 Type | Main Profile |
| Video Bit Rate | 256 Kbps ~ 16 Mbps |
| Dual Streams | Support |
| Image | |
| Max. Resolution | 2560×1920 |
| Main Stream | 50Hz: 20fps (2560×1920), 25fps (2048×1536), 25fps(1920×1080), 25fps(1280×720) 60Hz: 20fps (2560×1920), 30fps (2048×1536), 30fps(1920×1080), 30fps(1280×720) |
| Sub Stream | 50Hz: 25fps (352×288, 640×480) 60Hz: 30fps (352×240, 640×480) |
| Others | Saturation, Brightness, Contrast adjustable by client software or web browser, Mirror, BLC, ROI, Dual Stream, Anti-Flicker, Privacy Mask, |
| Network | |
| Network Storage | NAS (Support NFS, SMB/CIFS), ANR |
| Alarm Trigger | Motion Detection, Tampering Alarm, Intrusion Detection, Line Crossing Detection, HDD Full, HDD Error, Network Disconnected, IP Address Conflicted |
| Protocols | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour |
| Standard | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI |
| General Function | Password Protection, IP Address Filtering, Anonymous Access, Watermark |
| General | |
| Operating Conditions | -30 °C ~ 60 °C (-22 °F ~ 140 °F), Humidity 95% or less (non-condensing) |
| Power Supply | DC12V ± 10%, PoE (802.3af) |
| Power Consumption | Max. 5.5 W |
| IR Range | Max. 30 meters |
| Protection Level | IP66 |
| Dimensions | 70×154.2×60.5 mm (2.8" × 6.2" × 2.4") |
| Weight | 500g (1.1 lbs) |