

TECHNOLOGY FOR THE WELDER'S WORLD.

# Маска сварщика der Alexander Binzel Schweisstechnik GmbH & Co. KG



[www.binzel-abicor.com](http://www.binzel-abicor.com)

# Маска сварщика der Alexander Binzel Schweisstechnik GmbH & Co. KG

- 12.4.128-83

DIN CERTO „CE“,  
ABICOR BINZEL

12.2.007.8-75, 12.2.007.0-75, 12.4.035-78,



www.binzel-abicor.com

# Маска сварщика der Alexander Binzel Schweisstechnik GmbH & Co. KG

ADF:

- ( ) , ( )
- EN 379, 4 / 9 - 13 1 / 1 / 1 / 1
  - 
  - 
  - 
  - ( )
  - ( )
  - ( )
  - ( )
- ADF „1 / 2 / 1 / 2“



# Маска сварщика

## der Alexander Binzel Schweisstechnik GmbH & Co. KG

ADF:

EN 379:2003

	A																					
	1,5	6	10	15	30	40	60	70	100	125	150	175	200	225	250	300	350	400	450	500	600	
	8				9			10			11			12			13			14		
MAG	8				9			10			11			12			13			14		
WIG	8				9			10			11			12			13					
MIG	9						10			11			12		13		14					
MIG	10								11			12		13		14						
	10								11		12		13		14		15					
	9						10		11		12			13								
	4		5		6		7		8		9		10		11		12					

ADF

9 13




www.binzel-abicor.com

# Маска сварщика der Alexander Binzel Schweisstechnik GmbH & Co. KG



- - 
  -
- ↗ ,
- ↘ / -

# Маска сварщика der Alexander Binzel Schweisstechnik GmbH & Co. KG

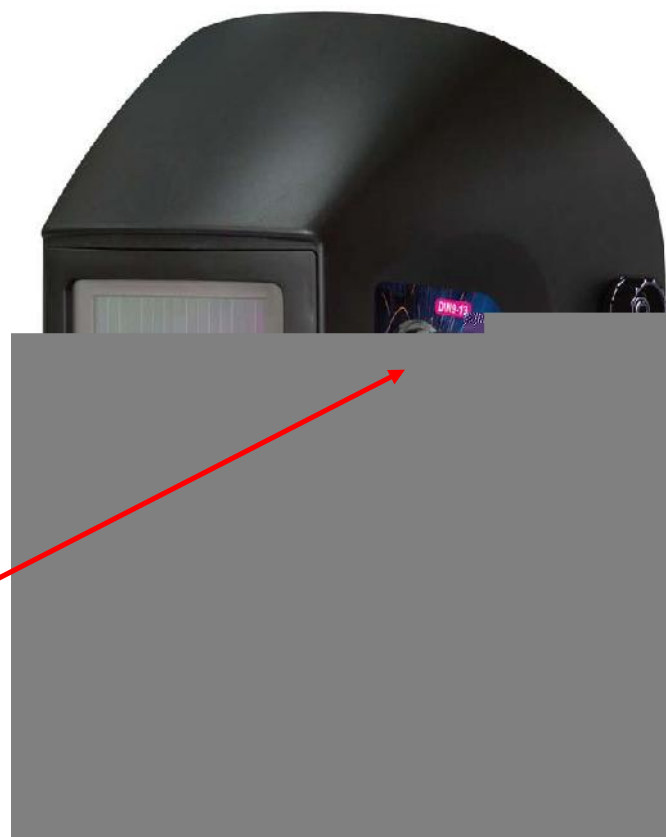

• ADF - 9 - 13

# Маска сварщика der Alexander Binzel Schweisstechnik GmbH & Co. KG

- [Weldstone](#) (PDF)
- [WELDSTONE](#) (Wilnsdorf, )
- -
- [ABICOR BINZEL](#)



# Schweißhelme der Alexander Binzel Schweisstechnik GmbH & Co. KG



TECHNOLOGY FOR THE WELDER'S WORLD.

## AUTO DARKENING WELDING HELMET ADF 600S

<b>Optical class:</b>	1/2/2/1/2
<b>Viewing area:</b>	Hexant 60x (2.80x) 205
<b>Cartridge size:</b>	110x60x40 mm (4.33x2.36x1.57 in)
<b>Arc sensor:</b>	3
<b>Light state:</b>	DN 3.8
<b>Dark state:</b>	DN 9 - 13
<b>Shade control:</b>	External, variable shade
<b>Power on/off:</b>	Fully automatic
<b>Sensitivity control:</b>	Low - High, by patch button
<b>UV/IR protection:</b>	UVB blocks 99.9% at all times
<b>Power supply:</b>	Side roll - no battery change required
<b>Switching time:</b>	1 / 10,000 s from light to dark
<b>Delay (dark to light):</b>	0.05 up to 0.30 s at vision position
	0.65 up to 0.80 s at vision position
	0.20 max. / 0.20 s 1.10 max. / AC
<b>Low impedance TSD reset:</b>	Yes
<b>Operating temperature:</b>	-10°C up to +40°C (14°F up to 104°F)
<b>Storage temperature:</b>	-20°C up to +70°C (-4°F up to 158°F)
<b>Helmet material:</b>	High impact resistance nylon
<b>Total weight:</b>	432 g
<b>Application range:</b>	MIG/MAG (CCJ, 3MAN) in various settings TIG, PLASMA arc-welding/buffing grinding cut for laser welding or oxyacetylene welding/buffing
<b>Approved:</b>	GS, DIN 4549/101, CE, CSA Z94.3, ANSI Z87.1

ABICOR BINZEL

www.binzel-abicor.com



Betriebsanleitung  
Automatik Schweißhelm  
ADF 600S

www.binzel-abicor.com