



Park Ranger 2150 Tipping Shovel

The tipping shovel makes light work of transporting gravel, sand or mould and saves the operator many lifts during the working day. 100 kg is easily transported from one place to another - even on the narrowest paths.

The hydraulic tipping function ensures an easy handling and is perfect when unloading over obstacles like for example small hedges. The transported material is spread evenly by unloading. For a perfect result level the layer with the edge of the shovel.

The shovel features a sturdy steel construction, which enables it to manage a variety of different applications besides transporting material, for example to scrape off unwanted grass growth from flagged areas.




With the Park Ranger 2150 the changeover from one attachment to another is done in less than 4 minutes - no tools required!



Technical data

Tipping Shovel

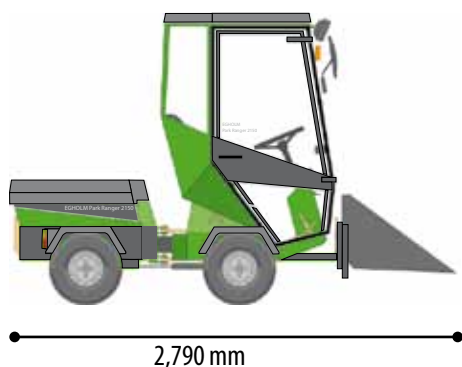

Special features

The tipping shovel quickly becomes an indispensable attachment

No need for a wheelbarrow...

Dimensions

Attached:

Length	2,790 mm
Width	1,045 mm
Height	1,935 mm

Storage dimensions:

Length	670 mm
Width	1,045 mm
Height	405 mm

Technical data:

Weight	38 kg
Volume	66 L
Lifting capacity	100 kg
Ground clearance under shovel	480 mm

CE certified according to EU Directive