




The extrusion is made from high quality Aviation 6063-T5 aluminum alloy with Double-Anodized, and is designed for flexible LED Strips that are 8-12mm wide. One of the accessories offered for the extrusion are covers that shade and protect LEDs inside the profile. Covers are made of polycarbonate and are certified for excellent resistance to all weather conditions and UV radiation, as well as being flame retardant. Standard polypropylene end caps and mounting brackets (made from steel with zinc or chrome finish) are used for the extrusion as supplementary accessories. End caps protect the extrusion from dust and other undesirable elements, which can make LED strips dirty and consequently deteriorate the lighting parameters. The extrusion can be mounted to surfaces with the use of double-sided adhesive tape or mounting brackets. The mounting bracket guarantees easy and secure mounting of the extrusion to a desired surface. It can also be used as a connector between extrusions.



Aluminium Profile Dimension

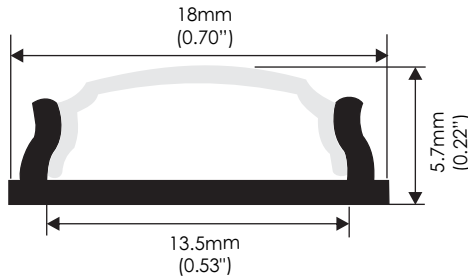

Applications

Interior lighting, curved lighting for display counter.

Technical Specifications

Ingress Protection Rating	IP20 (Standard)
Available Lengths	1.0 meter
Material	Body-Aluminum, Cover-Polycarbonate(PC), End cap-polypropylene(PP), Mounting bracket, spring-steel
Lighting Transmittance	Milky Cover
Operating Temperature Range	-30°C~60°C (-22°F~140°F)
Flammability	V2 Fire Rating for PC Cover
UV Stability	Ageing resistance
Heat Stability	Under 100°C
UL94 Rating	UL94V2
Grade of Aluminium	6063-T5 Anodizing
Heat Transmission properties	Aluminium specific heat is 0.88x10J/(Kg x °C)

Bend Radius

Maximum Band Radius

