

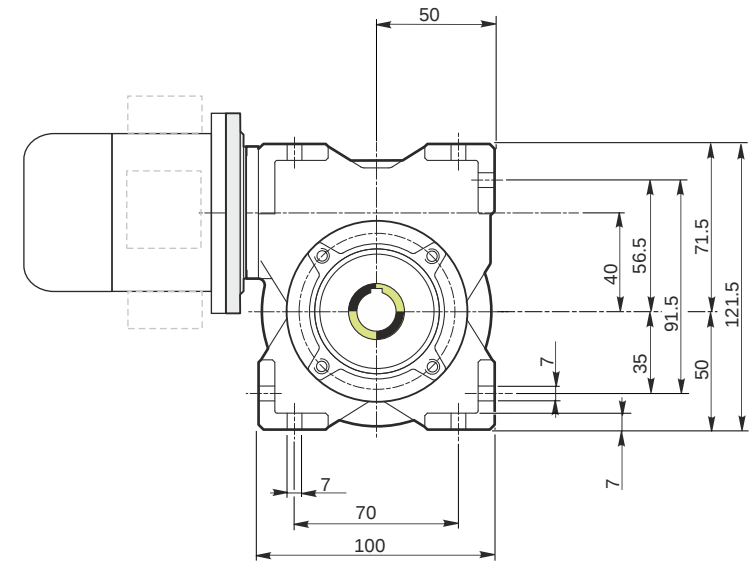
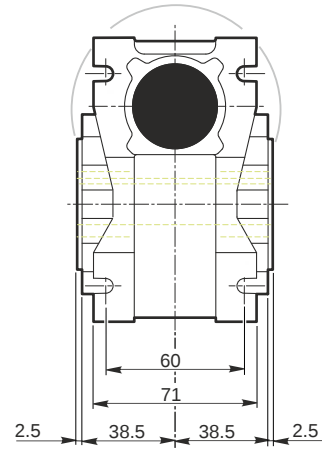
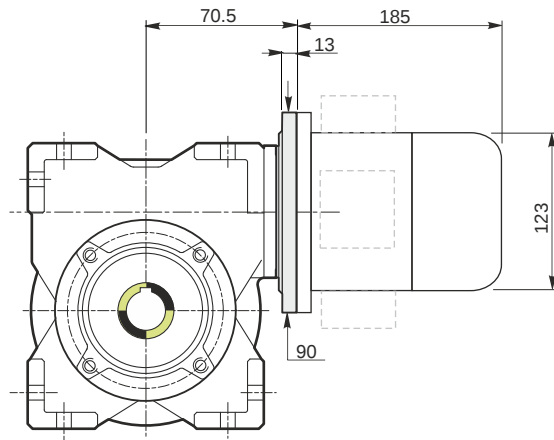


Hollow output shaft




59.99
59.971


18.018
18.000



Mounting positions

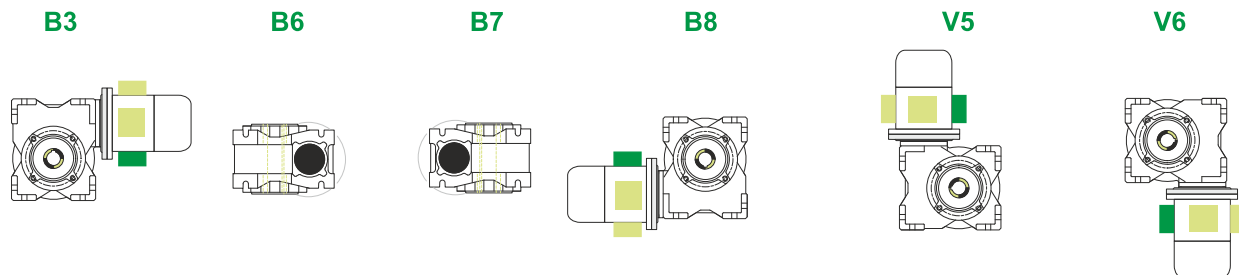

Terminal box position




0.08



Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

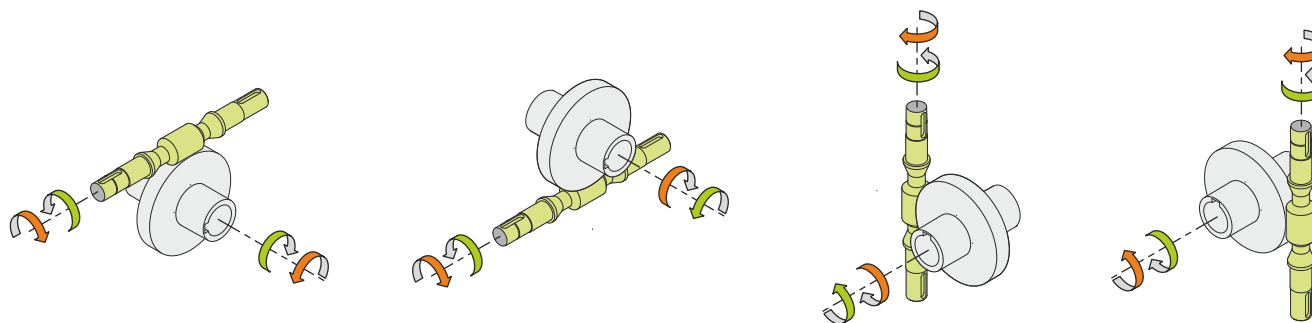

Weight

Gear unit [kg]	2.5
Electric motor [kg]	4.3

Gearing data

Axial module	0.8
Number of starts	1
Lead angle	2° 51'
Pressure angle	20°

Backdriving

Static self-locking
No back-driving
Low dynamic back-driving