



ELESGO® floor

Technical datasheet
Wellness long format
V4 XL

Dimensions
in mm
2386 x 236 x 10,0

Packaging
3 Pieces (1,69 m²)



Emmission testing
environmental certificate



Product quality
permanent surveillance



Certified according
ISO 9001:2008




German institut of
Construction technology



Made
in Germany



20 years guarantee

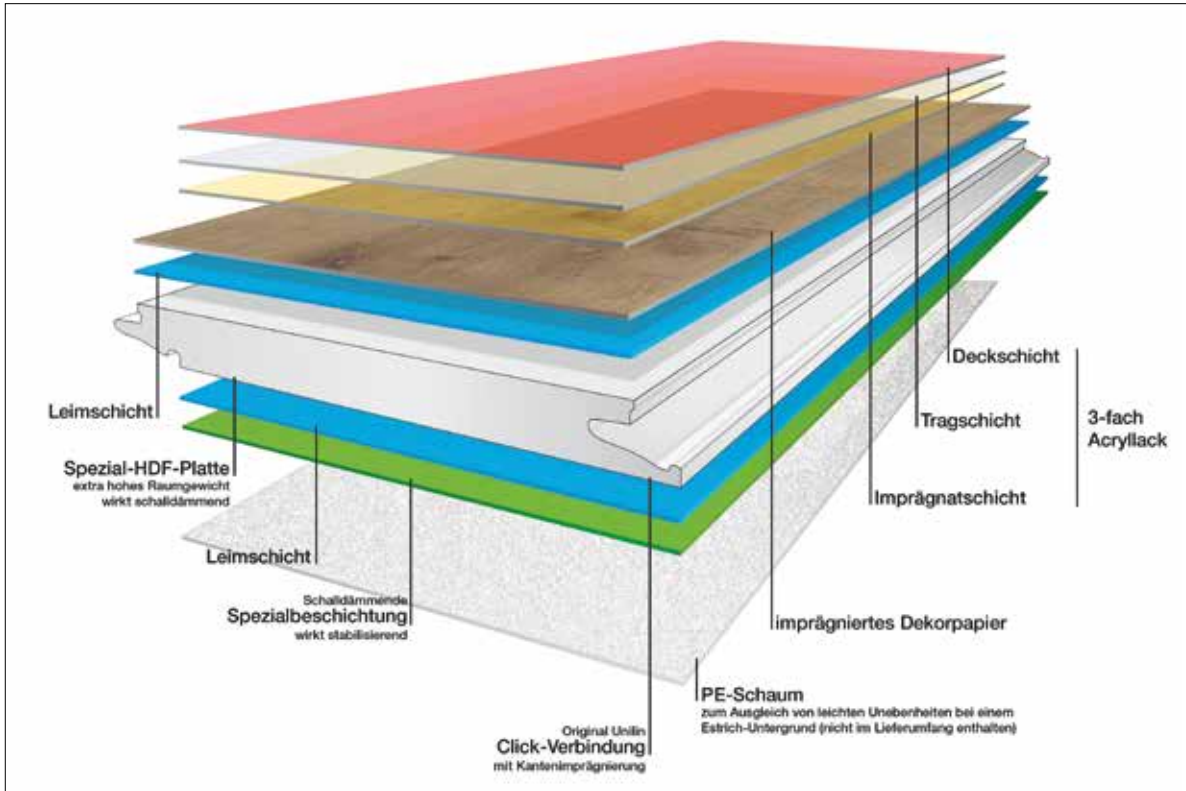

	Properties	DIN EN 13329	Results	Rating	
	Wear resistance	EN 16511 (to EN 13329)	AC4	✓	
	Impact resistance	big ball small ball	EN 438-2	IC 2-3	✓
	Stain resistance	EN 438	Grade 5	✓	
	Moving of furniture legs	EN 424	fulfilled	✓	
	Castor chair test	EN 425	fulfilled	✓	
	Thickness swelling	EN 13329	≤ 18 %	✓	
	Low-emission	EN 717-1	E1	✓	
VOC	Tested for harmful substances	DIN ISO 16000/6	fulfilled	✓	
	Fire behavior	EN 13501-1	Cfl-s1	✓	
	Heat conduction	EN 52612	0,068	✓	
	Electrostatic behavior	EN 1081	Antistatic	✓	



The fine wooden texture

Classification **President / 32**

for residential areas
with intensive foot traffic

for commercial areas
with medium foot traffic





ELESGO® floor

Technical datasheet Wellness Maxi V5

Dimensions
in mm
1184 x 320 x 7,7

Packaging
6 Pieces (2,27 m²)



Emmission testing
environmental certificate



Product quality
permanent surveillance



Certified according
ISO 9001:2008




German institut of
Construction technology



Made
in Germany



20 years guarantee

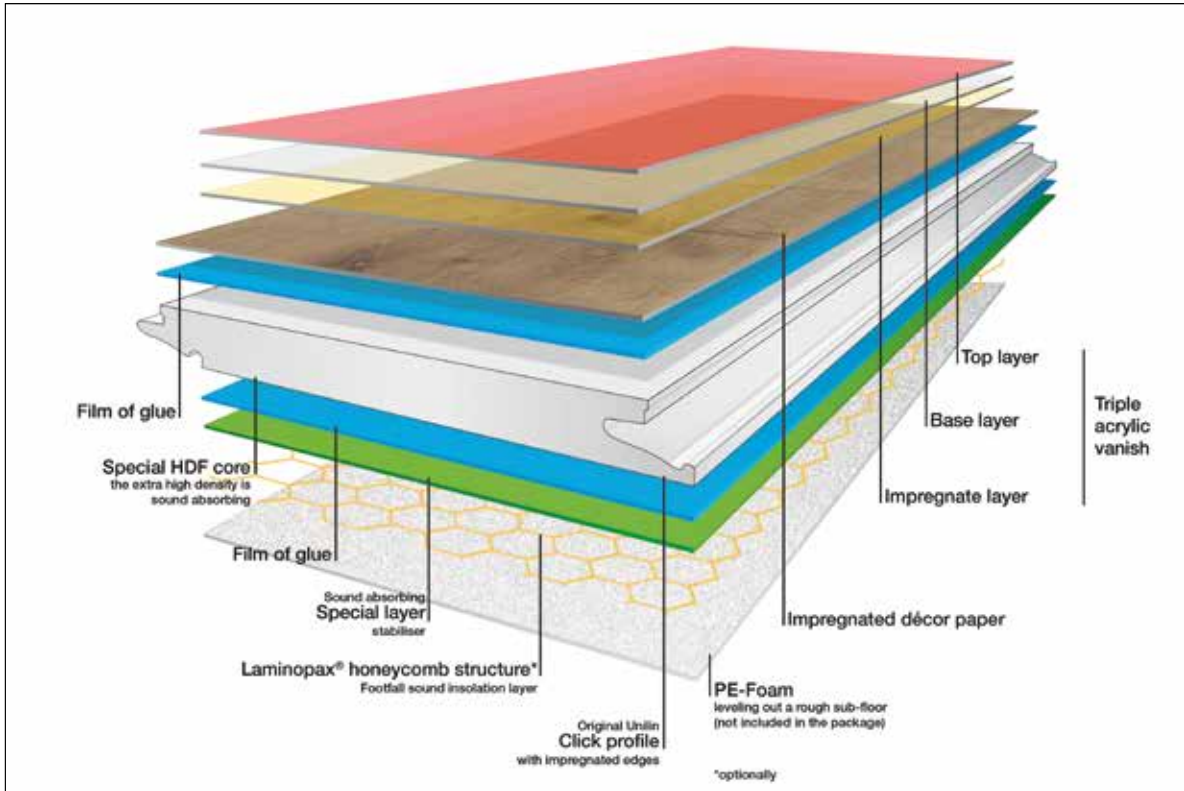


	Properties	DIN EN 13329	Results	Rating	
	Wear resistance	EN 16511 (to EN 13329)	AC4	✓	
	Impact resistance	big ball small ball	EN 438-2	IC 2-3	✓
	Stain resistance	EN 438	Grade 5	✓	
	Moving of furniture legs	EN 424	fulfilled	✓	
	Castor chair test	EN 425	fulfilled	✓	
	Thickness swelling	EN 13329	≤ 18 %	✓	
	Low-emission	EN 717-1	E1	✓	
VOC	Tested for harmful substances	DIN ISO 16000/6	fulfilled	✓	
	Fire behavior	EN 13501-1	Cfl-s1	✓	
	Heat conduction	EN 52612	0,068	✓	
	Electrostatic behavior	EN 1081	Antistatic	✓	



The matt-shine mélange

Classification **President / 32**



for residential areas
with intensive foot traffic

for commercial areas
with medium foot traffic





ELESGO® floor

Technical datasheet

Wellness flat edge

Dimensions
in mm
1184 x 185 x 7,7

Packaging
9 Pieces (1,97 m²)



Emmission testing
environmental certificate



Product quality
permanent surveillance



Certified according
ISO 9001:2008




German institut of
Construction technology




Made
in Germany



20 years guarantee

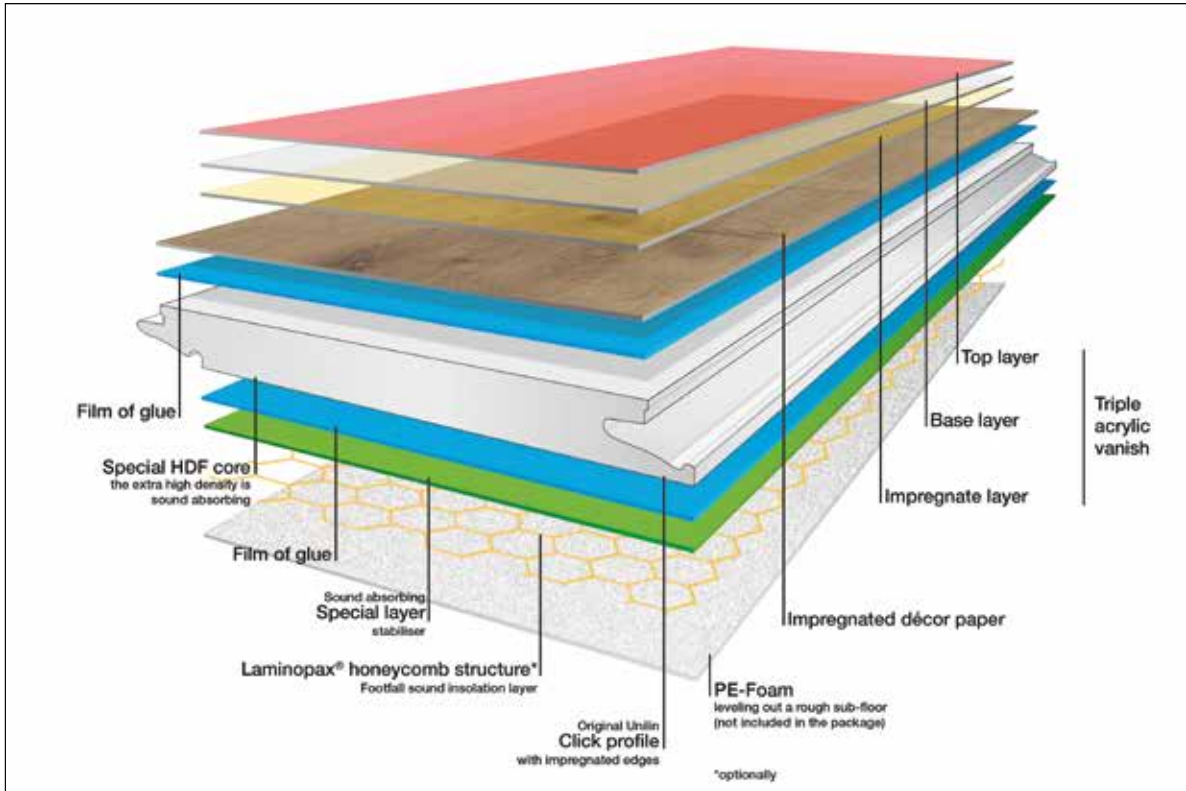

	Properties	DIN EN 13329	Results	Rating
	Wear resistance	EN 16511 (to EN 13329)	AC4	✓
	Impact resistance	EN 438-2	IC 2-3	✓
	Stain resistance	EN 438	Grade 5	✓
	Moving of furniture legs	EN 424	fulfilled	✓
	Castor chair test	EN 425	fulfilled	✓
	Thickness swelling	EN 13329	≤ 18 %	✓
	Low-emission	EN 717-1	E1	✓
VOC	Tested for harmful substances	DIN ISO 16000/6	fulfilled	✓
	Fire behavior	EN 13501-1	Cfl-s1	✓
	Heat conduction	EN 52612	0,068	✓
	Electrostatic behavior	EN 1081	Antistatic	✓



The real to life wood
structure




The soft fine matt surface
(Wood effect as oiled)



The tastefully harmonize
pearl structure

Classification President / 32



for residential areas
with intensive foot traffic

for commercial areas
with medium foot traffic





ELESGO® floor

Technical datasheet
Wellness Maxi V4

Dimensions
in mm
1184 x 236x 10

Packaging
6 Pieces (1,68 m²)



Emmission testing
environmental certificate



Product quality
permanent surveillance



Certified according
ISO 9001:2008




German institut of
Construction technology



Made
in Germany



20 years guarantee

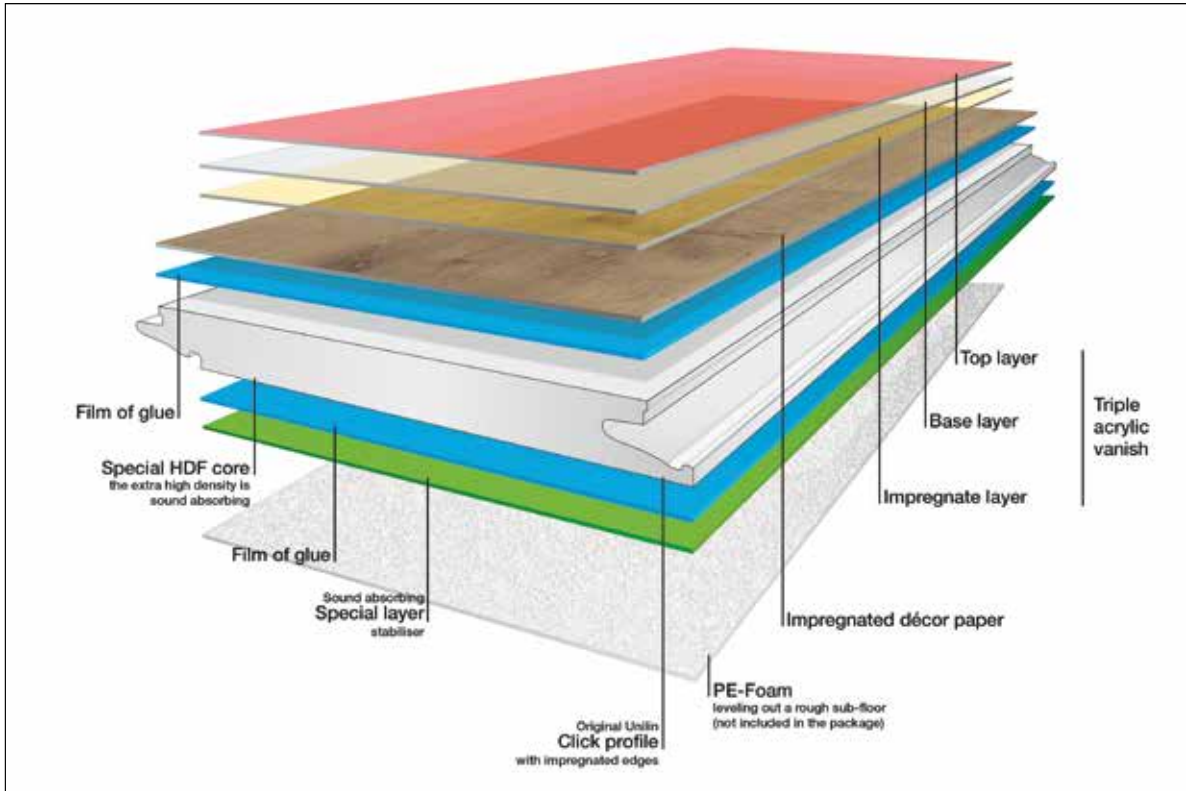

	Properties	DIN EN 13329	Results	Rating	
	Wear resistance	EN 16511 (to EN 13329)	AC4	✓	
	Impact resistance	big ball small ball	EN 438-2	IC 2-3	✓
	Stain resistance	EN 438	Grade 5	✓	
	Moving of furniture legs	EN 424	fulfilled	✓	
	Castor chair test	EN 425	fulfilled	✓	
	Thickness swelling	EN 13329	≤ 18 %	✓	
	Low-emission	EN 717-1	E1	✓	
VOC	Tested for harmful substances	DIN ISO 16000/6	fulfilled	✓	
	Fire behavior	EN 13501-1	Cfl-s1	✓	
	Heat conduction	EN 52612	0,068 (by 7,7 mm)	✓	
	Electrostatic behavior	EN 1081	Antistatic	✓	




The real to life
wood structure



The soft fine matt surface
(Wood effect as oiled)

Classification **President / 32**



for residential areas
with intensive foot traffic

for commercial areas
with medium foot traffic

