THERMOSTAT:L SERIES WP MODEL

Take our thermostat, take your temperature

Product Image

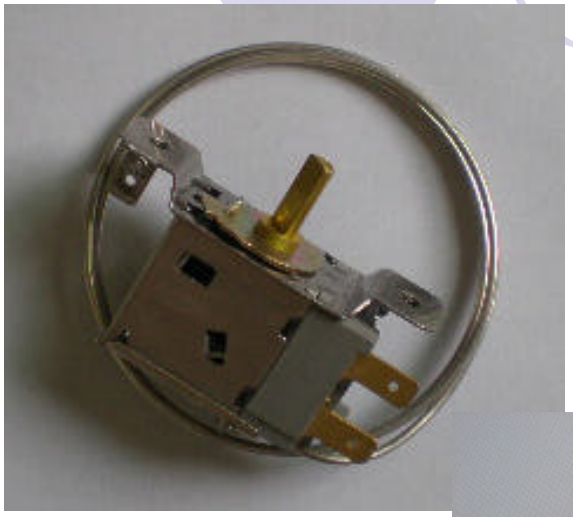

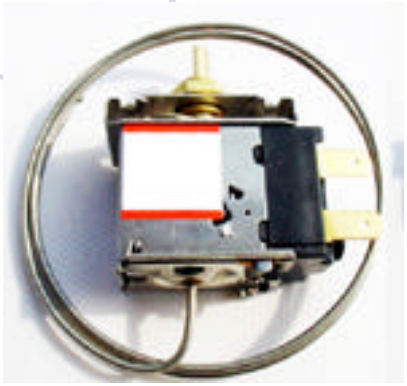

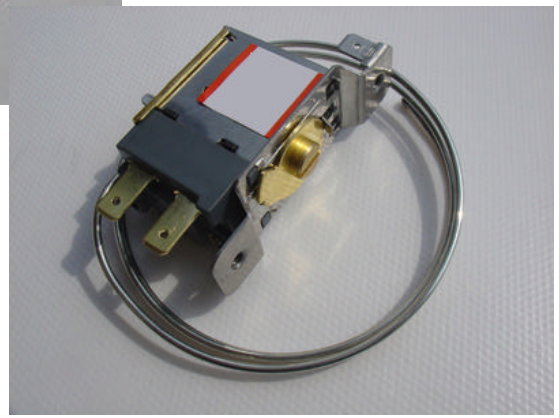

Usage: use in single door refrigerator, ice tank, show case, wine storage ,water fountain, vehicle air-conditioner etc.
Control temp. range:-35～+15℃
Rating voltage:AC220V/AC110V, DC 8V, 12V,24V in vehicle air-conditioner.
Rating current:5A,8A in vehicle air-conditioner.
MAX use environment temp.:70℃
Characteristic: precise, control range wide, high reliability, extensive usage. also can select the function of manual force-off and force-on.

Copyright
Eric-zhang
Reserved

Typical Model	Temperature Characteristic(℃)						Sensor Length (MM)	Installation Model
	COLD		NORMAL		WARM			
	ON	OFF	ON	OFF	ON	OFF		
WPF22-L	——	-22±2	——	——	-2±1.5	-8±1.5	950±50	NUT/SCREW FIXED
WPF27-L	-20±1.5	-27±1.5	-12.5±2	-18.5±2	3±2	-1.5±2	900±30	NUT/SCREW FIXED
WP5-L	——	——	10±1.5	5±1.5	13±2	——	500±30	NUT/SCREW FIXED
PFN-124G	——	-26±2	-14±1.5	-18±1.5	9±2	——	1200±50	NUT/SCREW FIXED

The above data are some of our typical models for your information, and we also can customize different specifications as requested.

THERMOSTAT:L SERIES WDF MODEL

Take our thermostat, take your temperature

Product Image

Usage: use in double door refrigerator and multiple door refrigerator
Control temp. range:-30～+10℃
Rating voltage:AC220V/AC110V,
Rating current:5A,
MAX use environment temp.:70℃
Characteristic: precise, high reliability, extensive usage, switch on at invariable temp. also can select the function of manual force-off and force-on.

Copyright
Eric-zhang
Reserved

Typical Model	Temperature Characteristic(℃)						Sensor Length (MM)	Installation Model
	COLD		NORMAL		WARM			
	ON	OFF	ON	OFF	ON	OFF		
WDF18-L	3.5±2	-18±2	——	——	3.5±1.5	-7±1.5	700±50	NUT/SCREW FIXED
WDF20-L	3.5±1.5	-20±1.5	——	——	3.5±1.5	-7±1.5	600±30	NUT/SCREW FIXED
WDF25-L	4±1.5	-25±2	——	——	4±1.5	-10±1.5	600±30	NUT/SCREW FIXED
WDF27-L	3.5±1.5	-27±2	3.5±1.5	-19.5±1.5	3.5±2	-12±2	560±30	NUT/SCREW FIXED

The above data are some of our typical models for your information, and we also can customize different specifications as requested.

THERMOSTAT:L SERIES WL/WLR MODEL

Take our thermostat, take your temperature

Product Image

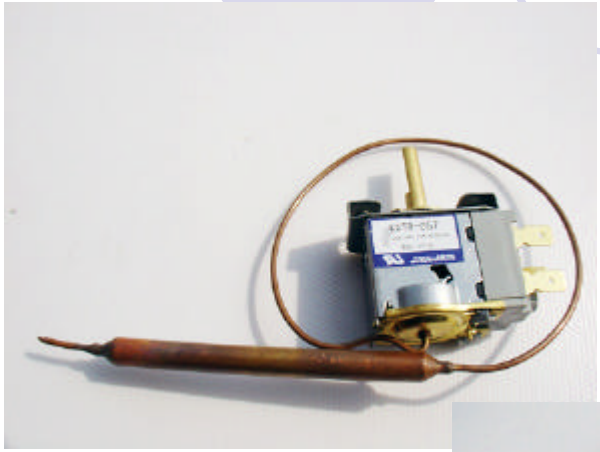

Usage: use in window-mounted cool air-conditioner, window-mounted cool& warm air-conditioner,
Control temp. range:10～+35℃
Rating voltage:AC220V/AC110V,
Rating current:16A(cool air-conditioner), 20A(cool&warm air-conditioner)
MAX use environment temp.:70℃
Characteristic: precise, high reliability, extensive usage, high-power. also can select the function of manual force-on.

Copyright Eric-zhang Reserved

Typical Model	Temperature Characteristic(℃)						Sensor Length (MM)	Installation Model
	COLD		NORMAL		WARM			
	ON	OFF	ON	OFF	ON	OFF		
PFA-606S	21.5±1.5	18.5±1.5	——	——	32±1.5	——	500±30	NUT/SCREW FIXED
YWTB-604G	18±1.5	15±1.5	——	——	32±1.5	——	500±30	NUT/SCREW FIXED
WLR15	18±1.5	15±1.5	——	——	31±2.5	28±2.5	400±30	NUT/SCREW FIXED
WLR14.5	17.5±2	14.5±1.5	——	——	30±2.5	27.5±2.5	650±30	NUT/SCREW FIXED

The above data are some of our typical models for your information, and we also can customize different specifications as requested.

THERMOSTAT:L SERIES WSF MODEL

Take our thermostat, take your temperature

Product Image

Usage: use in small refrigerator ,room refrigerator
Control temp. range:-30～+10℃
Rating voltage:AC220V/AC110V,
Rating current:5A,
MAX use environment temp.:70℃
Characteristic: precise, high reliability, extensive usage, semiautomatic defrost. also can select the function of manual force-off and force-on.

Copyright
Eric-zhang
Reserved

Typical Model	Temperature Characteristic(℃)				Defrost	Sensor Length (MM)	Installation Model
	COLD		WARM				
	ON	OFF	ON	OFF			
WSF26-L	-13±1.5	-26±1.5	0±2	——	4.5±2.5	500±30	NUT/SCREW FIXED
WSF24-L	-14±1.5	-24±1.5	2.5±2	——	5±2.5	1200±50	NUT/SCREW FIXED
WSF20-L	-14±1.5	-20±1.5	——	-4±2	5±2.5	1000±50	NUT/SCREW FIXED

The above data are some of our typical models for your information, and we also can customize different specifications as requested.