



### Technical Data

MODEL	Volt ( V )	r.p.m.	W	MAX.		dB (A)
				m <sup>3</sup> /h	mm H <sub>2</sub> O	
CM H 16.2	230 V~50 Hz.	2700	550	1500	73	70
CM H 16.4	230 V~50 Hz.	1460	140	750	20	57
CM H 18.2	230 V~50 Hz.	2650	800	1625	95	68
CM H 18.4	230 V~50 Hz.	1430	170	1000	27	63
CM H 21.2	230 V~50 Hz.	2700	1000	2500	140	83
CM H 21.4	230 V~50 Hz.	1390	385	1575	45	60
CT H 16.2	400 V~50 Hz.	2700	540	1500	73	70
CT H 16.4	400 V~50 Hz.	1470	210	750	20	57
CT H 18.2	400 V~50 Hz.	2770	890	1700	98	70
CT H 18.4	400 V~50 Hz.	1445	190	1100	29	64
CT H 21.2	400 V~50 Hz.	2700	1000	2500	140	83
CT H 21.4	400 V~50 Hz.	1430	440	1650	47	61

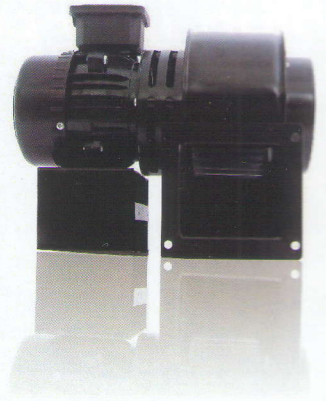

### Dimensions

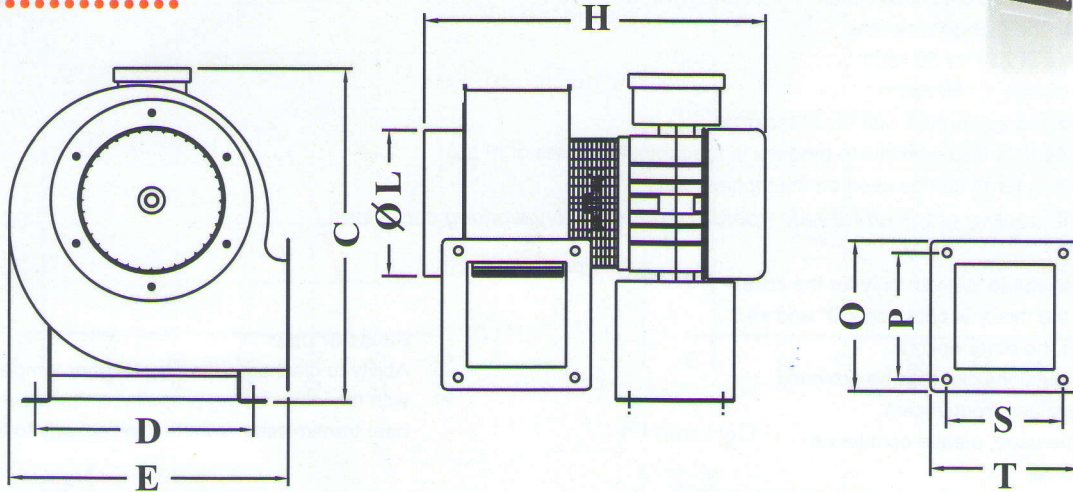


### Important Information:

Product data and technical values may vary according to the operation location and conditions. All of the data given herein have been measured according to standards of TSE and EC norms. Noise level measurements have been taken at a distance of 1,5 m from the related product. The recommended lifespan is 10 years. All of our products are certified with the guaranty certificate approved by the Ministry of Industry. Guaranty period is 2 years.

	C	D	E	H	ØL	O	P	S	T	Package Dimensions	Package Pcs	Gross Weight
CM-CT H 16,2	310	180	280	350	142	140	111	130	145	295 x 355 x 345	1	9,8
CM-CT H 16,4	310	180	280	350	142	140	111	130	145	295 x 355 x 345	1	9,6
CM-CT H 18,2	312	180	280	395	167	140	111	130	145	360 x 360 x 450	1	12
CM-CT H 18,4	312	180	280	395	167	140	111	130	145	360 x 360 x 450	1	11,5
CM-CT H 21,2	420	265	360	410	198	220	200	150	169	350 x 355 x 430	1	12,5
CM-CT H 21,4	420	265	360	410	198	220	200	150	169	350 x 355 x 430	1	12,5







Dimensions are in mm .

## High Temperature Radial Fans



**Performance Curves**

Q= Air Volume (m<sup>3</sup>/h)  
Pa= Static Pressure (Pa ve mmH<sub>2</sub>O)

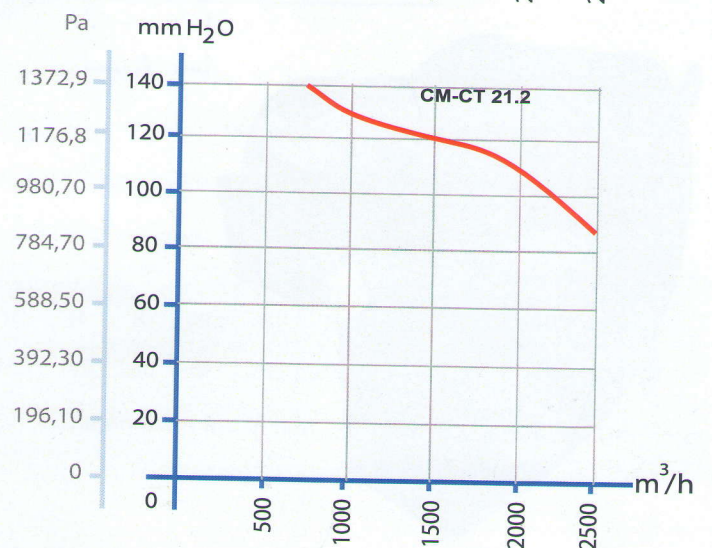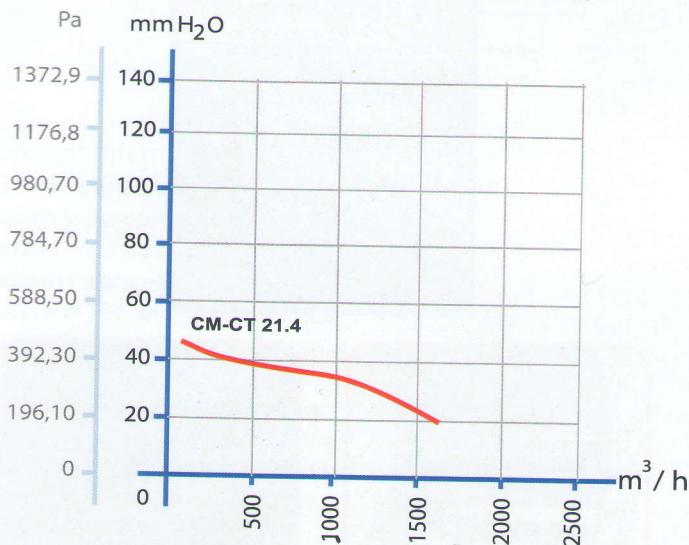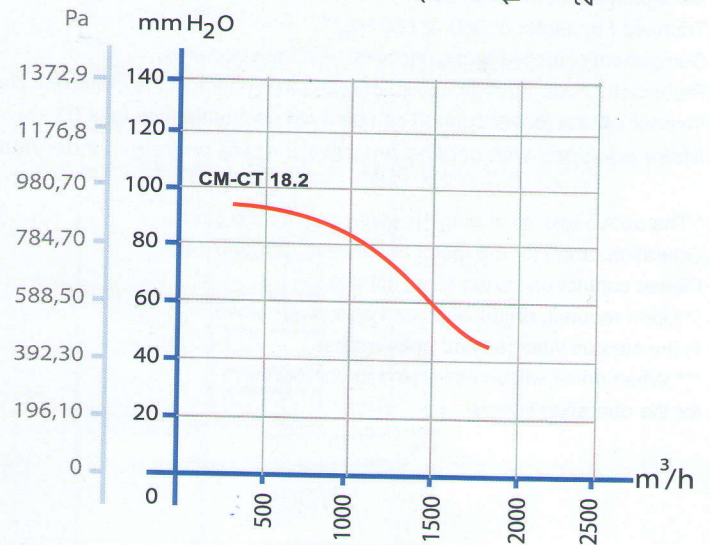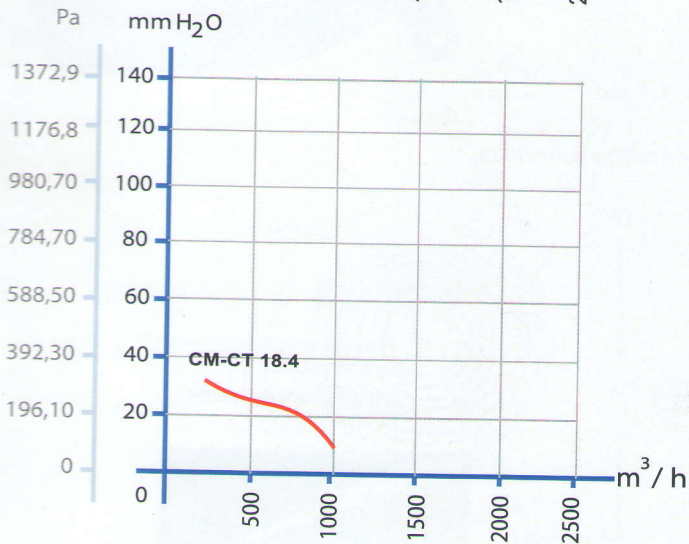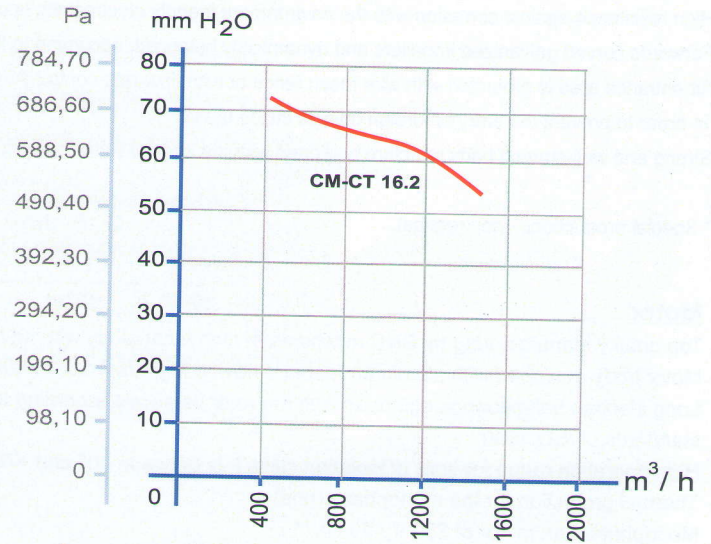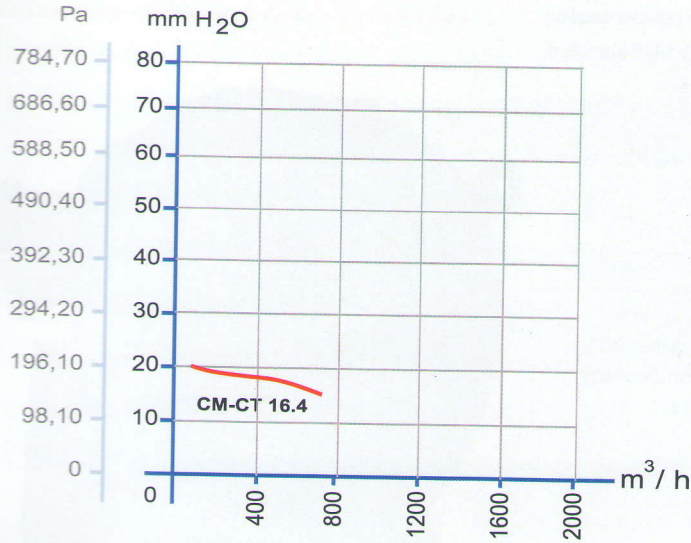

**High Temperature Radial Fans**