

CV 1650



FROZEN RUN



Modular ice maker up to 780 kg - Vertical evaporator system

• Position n°




• Application fields

Hotel	●●●●●●●●	Fish market	●●●●●●●●
Restaurant	●●●●●●●●	Supermarket	●●●●●●●●
Fast food	●●●●●●●●	SPA	●●●●●●●●
Bar	●●●●●●●●	Medical	●●●●●●●●
Disco	●●●●●●●●	Industry	●●●●●●●●

• Features & Plus

- Flat cube 7 gr crystalline and compact
- Our vertical evaporator provides separated cubes
- External structure AISI 304 Scotch Brite
- Electromechanical functioning
- Standard and special voltages
- ON-OFF switch
- Removable air filter for easy cleaning
- Washing system
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C

• Available dice size



• Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	780
21° C	15° C	770
32° C	21° C	680

• Usable Bins

- Bin T830

2 Years Warranty

subject to limitations

• Certifications available for this model



N.T.F. S.r.l. Nuove Tecnologie del Freddo

Via dell'Industria 10/B tel. +39 0331 436217
20020 Villa Cortese (MI), Italy fax +39 0331 436218

www.ntfice.it
info@ntfice.it



ntfice.it




CV 1650



FROZEN RUN



Modular ice maker up to 780 kg - Vertical evaporator system

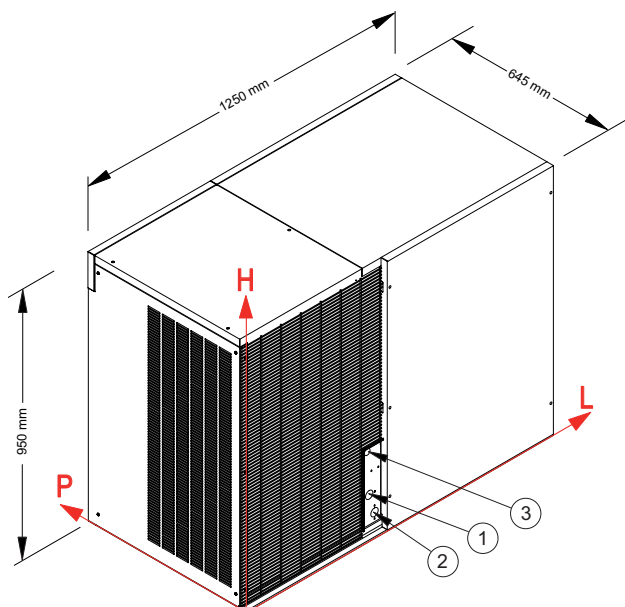

● Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

● Technical information

Production in 24h	770 kg
Cooling system	A
Kind of cube	7 g
Refrigerant	R404A
Standard voltage	400-415 V ~ 3N 50 Hz
Electrical consumption	4300 W
Fuse	32 A
Water consumption	1,4 l/kg
Sizes (L-P-H mm)	1250 - 645 - 950
Sizes with pack (L-P-H mm)	1350 - 745 - 1150
Net weight	186 kg
Gross weight	242 kg
Finish	AISI 304 stainless steel, scotch brite

● Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:
527 mm - 137 mm - 3/4"
- ② Water outlet:
550 mm - 65 mm - 24 mm
- ③ Electrical connections:
520 mm - 292 mm

All the technical information must be considered at the following conditions:



Standard
Cube (7 g)



Ambient
temperature
+21° C



Water
temperature
+15° C



Electrical
consumption
at +43° C
(standard
voltage)

Models and specifications are subject to change without notice
Rev. 00 - Issued January 2017



N.T.F. S.r.l. Nuove Tecnologie del Freddo

Via dell'Industria 10/B tel. +39 0331 436217
20020 Villa Cortese (MI), Italy fax +39 0331 436218

www.ntfice.it
info@ntfice.it



ntfice.it

