

# CV 950



## FROZEN RUN



### Modular ice maker up to 414 kg - Vertical evaporator system

#### • Position n°




#### • Application fields

Hotel	●●●●●●●●	Fish market	●●●●●●●●
Restaurant	●●●●●●●●	Supermarket	●●●●●●●●
Fast food	●●●●●●●●	SPA	●●●●●●●●
Bar	●●●●●●●●	Medical	●●●●●●●●
Disco	●●●●●●●●	Industry	●●●●●●●●

#### • Features & Plus

- Flat cube 7 gr crystalline and compact
- Our vertical evaporator provides separated cubes
- External structure AISI 304 Scotch Brite
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- ON-OFF switch
- Removable air filter for easy cleaning
- Washing system
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C

#### • Available dice size



#### • Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	414
21° C	15° C	400
32° C	21° C	334

#### • Usable Bins

- Bin PE530
- Bin T420
- Bin T830
- RB 280

### 2 Years Warranty

subject to limitations

#### • Certifications available for this model



**N.T.F. S.r.l. Nuove Tecnologie del Freddo**

Via dell'Industria 10/B tel. +39 0331 436217  
20020 Villa Cortese (MI), Italy fax +39 0331 436218

[www.ntfice.it](http://www.ntfice.it)  
info@ntfice.it



ntfice.it




# CV 950



## FROZEN RUN



### Modular ice maker up to 414 kg - Vertical evaporator system

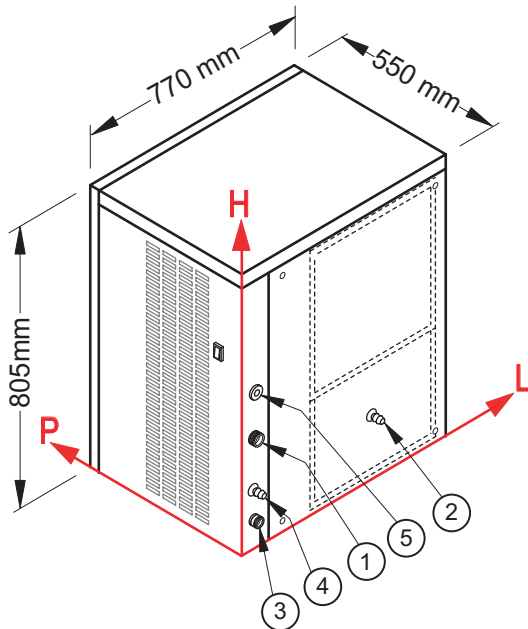

#### • Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:  
38 mm - 252 mm - 3/4"
- ② Condenser water inlet:  
375 mm - 115 mm - 12 mm
- ③ Water outlet:  
32 mm - 40 mm - 24 mm
- ④ Condenser water outlet:  
28 mm - 93 mm - 12 mm
- ⑤ Electrical connections:  
33 mm - 323 mm

② ④ Only for water cooling systems

#### • Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

#### • Technical information

Production in 24h	400 kg
Cooling system	A - W
Kind of cube	7 g
Refrigerant	R404A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	3000 W
Fuse	32 A
Water consumption	A: 1,8 l/kg W: 13 l/kg
Sizes (L-P-H mm)	770 - 550 - 805
Sizes with pack (L-P-H mm)	815 - 615 - 980
Net weight	113 kg
Gross weight	124 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:



Standard  
Cube (7 g)



Ambient  
temperature  
+21° C



Water  
temperature  
+15° C



Electrical  
consumption  
at +43° C  
(standard  
voltage)

Models and specifications are subject to change without notice  
Rev. 00 - Issued January 2017



**N.T.F. S.r.l. Nuove Tecnologie del Freddo**

Via dell'Industria 10/B tel. +39 0331 436217  
20020 Villa Cortese (MI), Italy fax +39 0331 436218

[www.ntfice.it](http://www.ntfice.it)  
info@ntfice.it



ntfice.it

