


## Self-contained ice maker up to 87 kg - Paddle system

- Position n°



- Available dice size



- Application fields

|            |            |             |            |
|------------|------------|-------------|------------|
| Hotel      | ●●●●●●●●●● | Fish market | ●●●●●●●●●● |
| Restaurant | ●●●●●●●●●● | Supermarket | ●●●●●●●●●● |
| Fast food  | ●●●●●●●●●● | SPA         | ●●●●●●●●●● |
| Bar        | ●●●●●●●●●● | Medical     | ●●●●●●●●●● |
| Disco      | ●●●●●●●●●● | Industry    | ●●●●●●●●●● |

- Features & Plus

- Hollow cube 20 gr
- External structure AISI 304 Scotch Brite
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Side grilles for better ventilation
- Removable side panels
- External protective filter, removable, easy to clean
- Water basin materials FDA approved
- Basin tipping safety system
- Automatic water charge
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Adjustable Stainless Steel feet

- Prod. 24h

| Air temp. | Water temp. | Prod. 24h kg |
|-----------|-------------|--------------|
| 10° C     | 10° C       | 87           |
| 21° C     | 15° C       | 75           |
| 32° C     | 21° C       | 60           |

## 2 Years Warranty

subject to limitations

- Certifications available for this model




# IFT 165



## FROZEN TOUCH



### Self-contained ice maker up to 87 kg - Paddle system

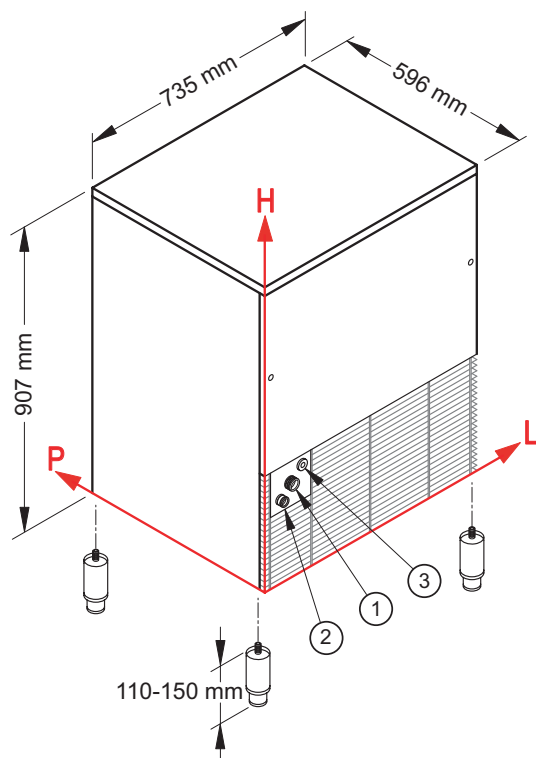

#### • Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:  
116 mm - 285 mm - 3/4"
- ② Water outlet:  
54 mm - 240 mm - 24 mm
- ③ Electrical connection:  
161 mm - 321 mm

#### • Working conditions

- Location: Indoor

|                      | Min           | Max           |
|----------------------|---------------|---------------|
| Ambient temperature  | +10° C        | +43° C        |
| Water temperature    | +3° C         | +32° C        |
| Voltage              | -10%          | +10%          |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

#### • Technical information

|                            |                                        |
|----------------------------|----------------------------------------|
| Production in 24h          | 75 kg                                  |
| Store capacity, up to      | 30 kg                                  |
| Cooling system             | A - W                                  |
| Kind of cube               | 20 g                                   |
| Refrigerant                | R404A                                  |
| Standard voltage           | 220-240 V ~ 50 Hz                      |
| Electrical consumption     | 480 W                                  |
| Fuse                       | 10 A                                   |
| Water consumption          | A: 3,3 l/kg<br>W: 10,5 l/kg            |
| Sizes (L-P-H mm)           | 735 - 596 - 907                        |
| Sizes with pack (L-P-H mm) | 780 - 640 - 1085                       |
| Net weight                 | 75 kg                                  |
| Gross weight               | 87 kg                                  |
| Finish                     | AISI 304 stainless steel, scotch brite |

All the technical information must be considered at the following conditions:

|                    |                      |                            |                          |                                                     |
|--------------------|----------------------|----------------------------|--------------------------|-----------------------------------------------------|
|                    |                      |                            |                          |                                                     |
| Sizes without feet | Standard Cube (20 g) | Ambient temperature +21° C | Water temperature +15° C | Electrical consumption at +43° C (standard voltage) |

Models and specifications are subject to change without notice  
Rev. 00 - Issued January 2017



**N.T.F. S.r.l. Nuove Tecnologie del Freddo**

Via dell'Industria 10/B tel. +39 0331 436217  
20020 Villa Cortese (MI), Italy fax +39 0331 436218

[www.ntfice.it](http://www.ntfice.it)  
info@ntfice.it



ntfice.it

