

IFT 65



FROZEN TOUCH




Self-contained ice maker up to 40 kg - Paddle system

● Position n°



● Available dice size



● Application fields

| | | | |
|------------|------------|-------------|------------|
| Hotel | ●●●●●●●●●● | Fish market | ●●●●●●●●●● |
| Restaurant | ●●●●●●●●●● | Supermarket | ●●●●●●●●●● |
| Fast food | ●●●●●●●●●● | SPA | ●●●●●●●●●● |
| Bar | ●●●●●●●●●● | Medical | ●●●●●●●●●● |
| Disco | ●●●●●●●●●● | Industry | ●●●●●●●●●● |

● Features & Plus

- Hollow cube 20 gr
- External structure AISI 304 Scotch Brite
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Side grilles for better ventilation
- Removable side panels
- External protective filter, removable, easy to clean
- Water basin materials FDA approved
- Basin tipping safety system
- Automatic water charge
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Adjustable Stainless Steel feet
- Undercounter model

● Prod. 24h

| Air temp. | Water temp. | Prod. 24h kg |
|-----------|-------------|--------------|
| 10° C | 10° C | 40 |
| 21° C | 15° C | 35 |
| 32° C | 21° C | 24 |

2 Years Warranty

subject to limitations

● Certifications available for this model



N.T.F. S.r.l. Nuove Tecnologie del Freddo

Via dell'Industria 10/B tel. +39 0331 436217
20020 Villa Cortese (MI), Italy fax +39 0331 436218

www.ntfice.it
info@ntfice.it



ntfice.it




IFT 65



FROZEN TOUCH



Self-contained ice maker up to 40 kg - Paddle system

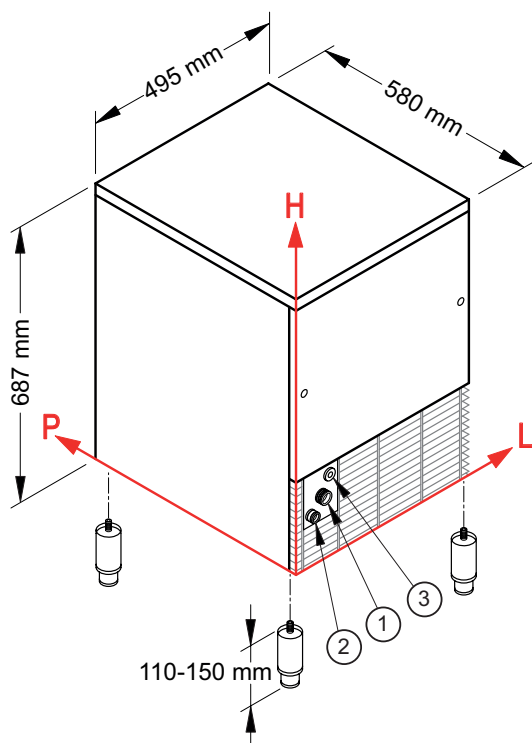

• Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:
111 mm - 196 mm - 3/4"
- ② Water outlet:
49 mm - 151 mm - 24 mm
- ③ Electrical connection:
156 mm - 232 mm

• Working conditions

- Location: Indoor

| | Min | Max |
|----------------------|---------------|---------------|
| Ambient temperature | +10° C | +43° C |
| Water temperature | +3° C | +32° C |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

• Technical information

| | |
|----------------------------|----------------------------------------|
| Production in 24h | 35 kg |
| Store capacity, up to | 15 kg |
| Cooling system | A - W |
| Kind of cube | 20 g |
| Refrigerant | R404A |
| Standard voltage | 220-240 V ~ 50 Hz |
| Electrical consumption | 310 W |
| Fuse | 10 A |
| Water consumption | A: 4,4 l/kg W: 13,3 l/kg |
| Sizes (L-P-H mm) | 495 - 580 - 687 |
| Sizes with pack (L-P-H mm) | 550 - 630 - 880 |
| Net weight | 47 kg |
| Gross weight | 55 kg |
| Finish | AISI 304 stainless steel, scotch brite |

All the technical information must be considered at the following conditions:

| | | | | |
|--------------------|----------------------|----------------------------|--------------------------|-----------------------------------------------------|
| | | | | |
| Sizes without feet | Standard Cube (20 g) | Ambient temperature +21° C | Water temperature +15° C | Electrical consumption at +43° C (standard voltage) |

Models and specifications are subject to change without notice
Rev. 00 - Issued January 2017



N.T.F. S.r.l. Nuove Tecnologie del Freddo

Via dell'Industria 10/B tel. +39 0331 436217
20020 Villa Cortese (MI), Italy fax +39 0331 436218

www.ntfice.it
info@ntfice.it



ntfice.it

