

PIR SENSOR


Product&Family Code: 088 001 0010

MONDEO



Technical Data	
Voltage	AC 220-240V / 50-60Hz
Detection Distance	6m Max. ($\leq 24^{\circ}\text{C}$)
Time-delay	Min.10sec \pm 3sec, Max.15min \pm 2min
Ambient Light	$<3 \sim 2000\text{Lux}$ (adjustable)
Average Load	Max 800W (Incandescent) 400W (ESL)
Protection Class	II
IP Rating	20
Detection Motion Speed	0,6-1,5 m/s
Material	Plastic
CE Approved	Yes
Installation Height	2.2 - 4m

Technical Drawing

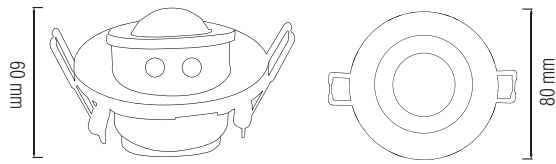

Applications

- For use indoors

Features

- A passive infrared sensor (PIR sensor) is an electronic sensor that measures infrared (IR) light radiating from objects in its field of view.
- The wide detection range senses an up, down, left and right field of motion.
- It works by seeing human body heat in motion via infrared rays.

