


AXE 5.0L Modular Battery

- Flexible capacity options, 5kWh to 400kWh
- Excellent safety of cobalt free LiFePO4 battery
- Stacked installation without cable connection
- Remote firmware upgrade

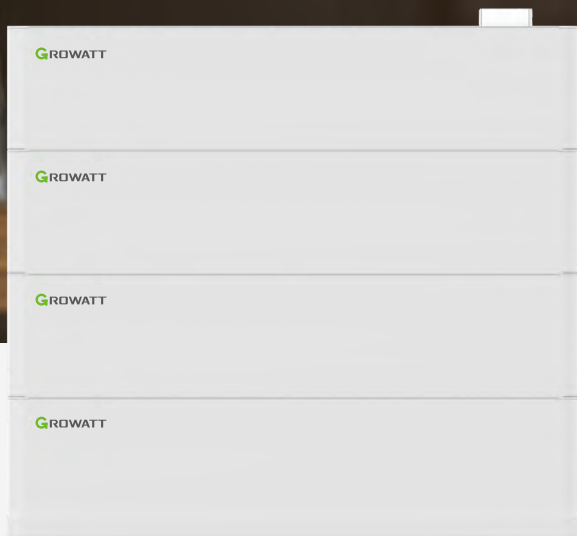

P O W E R
- I N G O
T O M O -
R R O W O

GROWATT

www.ginverter.com

Datasheet	AXE 5.0L	AXE 10.0L	AXE 15.0L	AXE 20.0L	AXE 25.0L	AXE 30.0L	AXE 35.0L	AXE 40.0L	AXE 45.0L	AXE 50.0L
System Demo										
Battery Module	AXE 5.0L - C1 (5.0kWh, 51.2V, 40kg)									
Number of Modules	1	2	3	4	5	6	7	8	9	10
Energy Capacity	5.0kWh	10.0kWh	15.0kWh	20.0kWh	25.0kWh	30.0kWh	35.0kWh	40.0kWh	45.0kWh	50.0kWh
Max Charge/Discharge Power*1	3kW	6kW	6kW	6kW	6kW	6kW	6kW	6kW	6kW	6kW
Max Charge/Discharge Current	60A	120A	120A	120A	120A	120A	120A	120A	120A	120A
Peak Power	4,5kW@3s	9kW@3s	11,25kW@3S	11,25kW@3S	11,25kW@3S	11,25kW@3S	11,25kW@3S	11,25kW@3S	11,25kW@3S	11,25kW@3S
Dimension (W/D/H)*2	650/350/165mm	650/350/305mm	650/350/445mm	650/350/585mm	650/350/725mm	650/350/865mm	650/350/1005mm	650/350/1145mm	650/350/1285mm	650/350/1425mm
Weight	42kg	82kg	122kg	162kg	202kg	242kg	282kg	322kg	362kg	402kg
General										
Battery Type	Cobalt Free Lithium Iron Phosphate (LFP)									
Nominal Voltage	51.2V									
Operating voltage Range	48 - 57.6V									
IP Protection	IP20									
Installation	Floor installation*3									
Operation Temperature	0~50°C									
Features										
DoD	92%									
Multi-cluster AXE battery system in parallel	Max. 8 clusters (Max. 400kWh)									
BMS Monitoring Parameters	SOC, System voltage, Current, Cell voltage, Cell temperature, PCBA temperature measurement									
Communication Port	CAN/RS485									
Warranty(5/10 years)	Yes/Opt									
Certification										
CE, ROHS, UL1973+FCC, UN38.3+PI965										

*1 Depend on the max. battery charge/discharge power of the inverter.

*2 The system dimension is included with the battery base

*3 Floor installation requires extra base (W/D/H=654/353/25mm)

*AXE series battery has an EU model and a General model, the storage inverters sold in European countries only work with EU model AXE battery.