

**INVERTER GENERATOR 3500 W**

- Peak power of 3500 W, maximum power of 3200 W for devices with sensitive electronics, power tools, etc.
- Equipped with two 230 V~ AC sockets and two 2.1 A USB ports (quick charging), 1 x 12 V power outlet
- Displacement of 141 cm<sup>3</sup>, air cooled 4 stroke petrol engine with pull cable starter
- Compact design in carrying case size made of impact-resistant plastic with handle
- Automatic shutdown in case of oil shortage
- A fuel tank of 6.3 L and an engine oil capacity of 400 ml
- Clean sine wave for sensitive devices such as laptops, televisions, tablets or smartphones
- Low noise level of 66 dB\*

\*Noise levels may vary depending on distance and location and were measured at 25% load and at a distance of 7 metres from the control panel.

**LOW NOISE**

**OPTIONAL ACCESSORIES**

ENGINE OIL  
ULTRA  
PERFORMANCE  
LONGLIFE SAE  
5W-40  
500 ml

Article number: 3906100701  
Barcode: 4014915073512

**360°**



**SPECIFICATIONS – ENGINE**

Model	Single cylinder; 4 stroke petrol engine
Max. engine power	3.6 kW / 4.8 PS
Displacement	141 cm <sup>3</sup>
Starting system	Pull cable starter
Tank capacity	6.3 L

**LOGISTICAL DATA**



Net / gross weight	22.5 / 24.2 kg
Packaging dimensions	590 x 370 x 535 mm
Article number	5906230903
EAN	4046664195221
20 container	248 pcs
40 container	496 pcs
40 HQ container	615 pcs

**SPECIFICATIONS – POWER GENERATOR**

Dimensions L x W x H	542 x 325 x 490 mm
Voltage control	Inverter
Nom. /Max. / Peak power	3000 / 3200 / 3500 W
Voltage output	230 V~
AC frequency	50 Hz
Overload protection	Yes
Low oil warning	Yes

**SELF-SUFFICIENT ENERGY SUPPLY**  
SUITABLE FOR

Camping   Garden shed   Heating system   Refrigerator   Event   Construction site   Laptop   Mobile phone

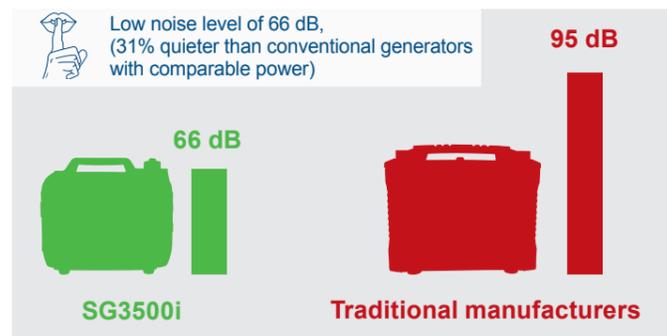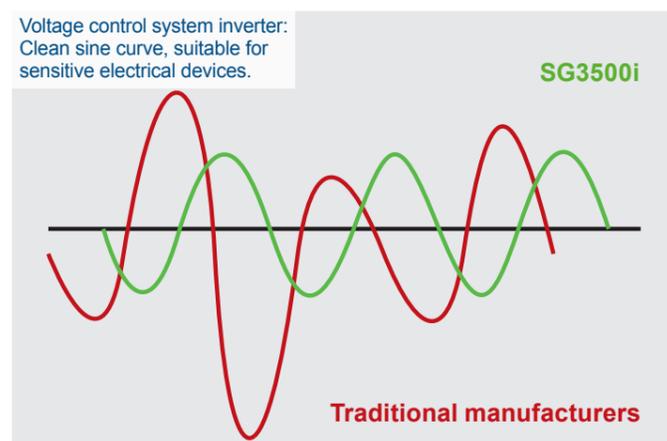

**PRODUCT DETAILS**

2x USB connection   2 x 230 V power outlet  
1 x 12 V power outlet

Oil warning indicator   Energy saving switch

Overload protection   Fuel-saving

Lightweight   Transportable

