

MOLDED SILICONE ASSE Cell Cull - Bottle Top Pump Segments	MBLIES	127 128	

# **MOLDED SILICONE ASSEMBLIES**

# **Cell Cull - Bottle Top**

**Product group:**Molded Silicone Assemblies

**Description:** Cell Cull - Bottle Top

Material: Platinum cured silicone medical grade

Characteristics: Cast from one piece

**Temperature range:** -20°C to max. +130°C

Certificates: USP Class VI

3A Standard

FDA 21 CFR 177.2600

### Easy and Quick with moderate prices

Our Cell Cull - Tops are manufactured from medical-grade platinum-cured silicone material that complies with USP Class VI, and

#### Custom configurations

The Cell Cull - Bottle Tops are also available in sizes other than those in our table below as well as in custom sizes. Please consult our factory for dimensions, design and prices.



## Dimensions for Cell Cull - Bottle Top

Variants	Material	Ports	AD 1	AD 2	AD 3	ID 1	ID 2	ID 3	Item No.
Variants 1.1	Silicone	3	9.50	9.50	7.00	6.40	6.40	2.40	601.001.9991
Variants 2.1	Silicone	2	9.50	9.50	-	6.40	6.40	-	601.001.9961
Accessory:									
GL45 screw cap, red	PBT								601.001.995

# **Connectors Pump Segments**

**Product Group:**Molded Silicone Assemblies

**Description:** Connectors Pump Segments

Material: • platinum-cured LSR (liquid silicone rubber)

Characteristics: • short, easy to replace pump segments for peristaltic pumps

• completely free from dead space and reductions / expensions

 with undetachable integrated gasket and supporting ring (no additional TC gasket)

• ready-to-use system manufactured under cleanroom conditions,

double-packaged and gamma sterilized

Sterilization: • sterilizable at 134°C

Certificates: • USP Class VI Bio-Comp.


• ISO 10993-4 to 10993-18

• radiation Certificate

### Brief description:

Pump tubes are subjected to very heavy mechanical loads. Connectors pump segments are highly resistant and very easy to replace. Only the segment of the pump segment that is put under the most severe stress is replaced.

Connectors pump segments are suitable for many conventional peristaltic pump heads. For more information please contact Connectors.

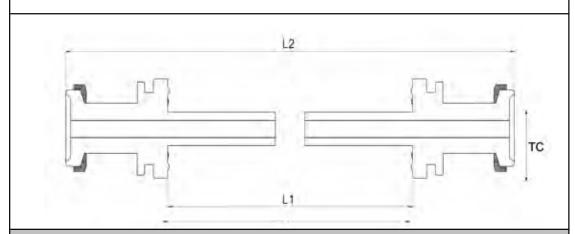

Dimensions for Connectors pump segments (further dimensions on request):

L2	L1	TC	ID	WS	Item No.
346	280	25	1.6	1.6	699.000.K05
346	280	25	3.2	2.4	699.000.K06
346	280	25	4.8	2.4	699.000.K07
346	280	25	6.4	2.4	699.000.K08
346	280	25	8.0	2.4	699.000.K09
346	280	25	9.6	2.4	699.000.K10