

Ø 450 外转子轴流风机 Axial Fans




使用说明:

工作方式: S1
 绝缘等级: B级 F级
 环境温度: -30°C ~ 60°C

应用范围:

4D-450 380V/50Hz 0-90Pa (20Pa-4450m³/h)
 4E-450 220V/50Hz 0-90Pa (20Pa-4210m³/h)
 4E-450 120V/60Hz 0-90Pa (20Pa-4850m³/h)
 6D-450 380V/50Hz 0-90Pa (20Pa-3000m³/h)
 6E-450 220V/50Hz 0-90Pa (20Pa-2750m³/h)
 6E-450 120V/60Hz 0-90Pa (20Pa-3400m³/h)

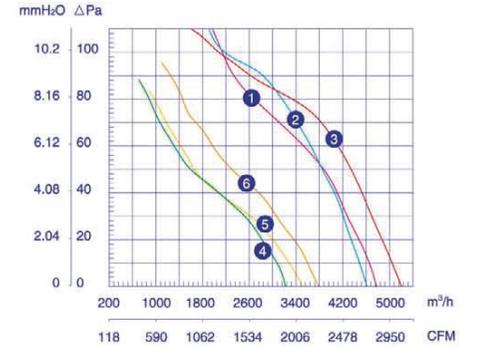

				VOLTAGE 额定电压 V	FREQUENCY 频率 Hz	CURRENT 额定电流 A	INPUT 输入功率 W	SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	CAPACITANCE 电容 μF	NOISE 噪音 dBA	NET WEIGHT 净重 kg	LICENSE 证书	NO. ON THE CURVE
YWF-4D-450-S-102/60-G	YWF-4D-450-S-102/60-T	YWF-4D-450-S-102/60-B	YWF-4D-450-S-102/60-R	380	50	0.60	250	1360	4800	/	68	8.0	CCC CE	1
YWF-4E-450-S-102/60-G	YWF-4E-450-S-102/60-T	YWF-4E-450-S-102/60-B	YWF-4E-450-S-102/60-R	220	50	1.20	250	1350	4620	8	68	8.0	CCC CE	2
YWF-4E-450-S-102/60-G	YWF-4E-450-S-102/60-T	YWF-4E-450-S-102/60-B	YWF-4E-450-S-102/60-R	120	60	2.55	300	1600	5200	32	68	8.0	CCC CE	3
YWF-6D-450-S-102/60-G	YWF-6D-450-S-102/60-T	YWF-6D-450-S-102/60-B	YWF-6D-450-S-102/60-R	380	50	0.42	150	900	3520	/	60	8.0	CCC CE	4
YWF-6E-450-S-102/60-G	YWF-6E-450-S-102/60-T	YWF-6E-450-S-102/60-B	YWF-6E-450-S-102/60-R	220	50	0.75	150	920	3220	6	60	8.0	CCC CE	5
YWF-6E-450-S-102/60-G	YWF-6E-450-S-102/60-T	YWF-6E-450-S-102/60-B	YWF-6E-450-S-102/60-R	120	60	1.52	180	1050	3800	20	60	8.0	CCC CE	6

