Scostamenti per quote libere					
<= 6	>6 <=30	>30 <=120	>120		
± 0.1	± 0.2	± 0.3	± 0.5		± 2°

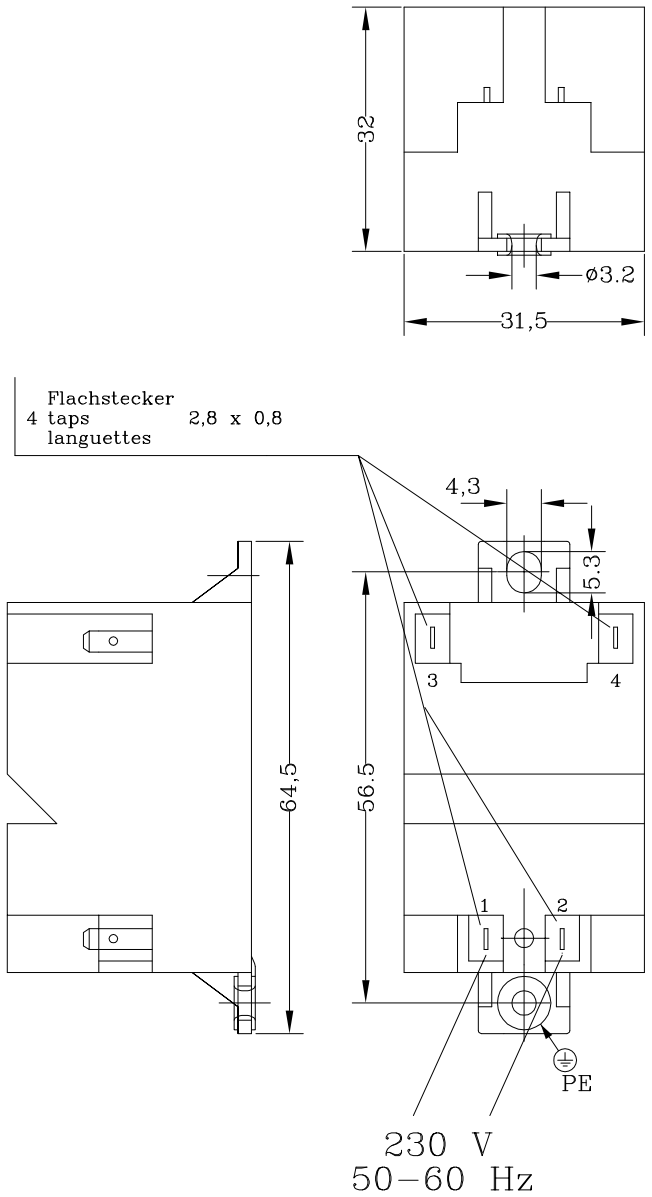

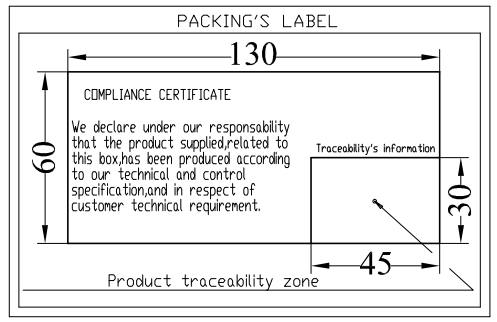

TRACEABILITY'S INFORMATION

The following information have to be written on the label
-) SIT 504
-) Made in Italy - Padova
-) 230V~ 50/60Hz
-) product code - revision index
-) lot number
-) date (year & week)

SIT la precisa SPA

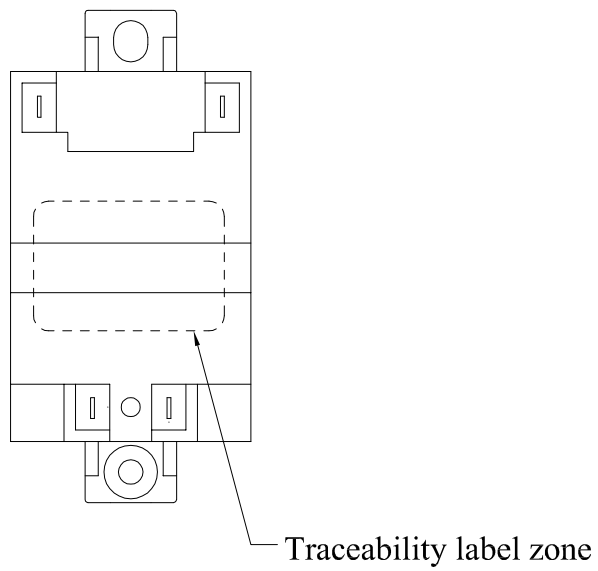

Supplier code: 07000036/02		
Technische Daten:		
Performances:		
Caratteristiche tecniche		
Taktfunken Repetitive spark Frequenza di scarica	(230 V)	typ. 25 Hz
Zündfrequenz bei 195 V Spark frequency at 195 V frequenza di scarica a 195V		≥ 10 Hz
Zündstellen Outlets Uscite	(3, 4)	2
Versorgungsspannung Main voltage Tensione di funzionamento	(1, 2)	230V +10 % −15 %
Nennfrequenz Main frequency Frequenza di funzionamento		50–60 Hz
Leistungsaufnahme Power consumption Potenza assorbita		typ. 5 VA
Lebensdauer Live time Tempo di vita	min. 5,000.000	Entladungen ignitions scariche
Funkenstrecken Spark gap Distanza di scarica		2 x max. 4 mm
Umgebungstemperatur Ambient temperature Temperatura ambiente	−20 °C	bis to ou +70 °C
Zündspannung Ignition voltage (32 pF Last) Tensione di scarica		typ. 20 kV
Funkenenergie Spark power Energia di scarica	(2kOhm)	typ. 5 mJ
Mit integrierter Funkentstörung. With integral r.f.i. suppression. Filtri r.f.i. integrati.		
Gewicht Weight Peso		typ. 64 g
V D E Ausweis Nr.: 65089 CE–0085AU0190		

PROPRIETA' RISERVATA - Sul presente disegno ci riserviamo tutti i diritti a termine di legge

MODIFICHE

Indice	N.Informaz.	Data	Descrizione	Firma

	Data	Firma
Disegnato	23.01.2002	M. Santello
Controllato	23.01.2002	D. Briarava
Visto		

SIT la precisa SPA
35129 Padova (Italy) Viale dell'Industria 31/33

ACCENDITORE STANDALONE 25 Hz

Materiale
Forma di Materiale
Classif. interna o specifica
Trattamenti Termici
Trattamenti Superficiali

Scala 1 : 1
Sostituisce il
N.Informaz.di nascita 10061
Frm. A3
Codice 0504501
Esp. 00