

Specifications

Max. working pressure	250 bar
Weight	182 kg
Working volume	61 L
Total volume	67 L
Max. cyl. load (start tipping)	345 kN

Max. pump flow

With KO ¹	190 L/min
Without KO ¹	162 L/min
With KO ¹ below -20°C	133 L/min
Without KO ¹ below -20°C	113 L/min

Tipping time

With KO ¹	19 sec
Without KO ¹	23 sec
With KO ¹ below -20°C	27 sec
Without KO ¹ below -20°C	33 sec
Allowable lowering time	19 sec

Extension	1	2	3	4	5	6	7	Total
Effective diameter [mm]	157	137	118	99				4660
Stroke* [mm]	1150	1170	1170	1170				

Technical notes

- This cylinder is a lifting device only.
- It should not be used as a structural member and should not be subjected to side loads.
- Tipping valve must have a pressure relief at the cylinder port set not higher than max. working pressure.
- Verify max. cyl. load.
- Working temperature range is between -40°C and +80°C.
- Max. duration of extension is 0.5 hours (excluded hard chromed stages).
- Cylinder is painted black (RAL9005) with a min. thickness conforming to the 480 hours neutral salt spray test as per ISO 9227.
- ¹ Hyva knock-off.


Related documentation

Bracket options: 015BRA11 & 015BRA13

Mounting instructions: CYL-0033

Oil specifications: OIL-0011
Spec sheet explanation: CYL-0041

Tipping weight

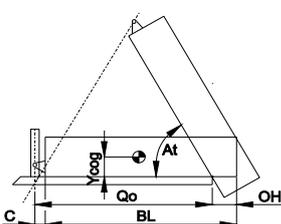


BL	body length
OH	rear overhang
Ycog	vert. pos. centre of gravity
Qo	pivot length
C	bracket length
At	tipping angle
	stroke x 60 / Qo

BL [mm]	6100			5950			5800		
OH [mm]	200	500	800	200	500	800	200	500	800
At [°]	46	49	52	48	50	54	49	52	55
Ycog [mm]									
600	54	60	69	55	62	72	56	64	75
900	59	67	80	61	70	84	62	73	
1200	65	76		67			70		

Tipping weight [ton] at maximum pressure of 250 bar for a vertically mounted cylinder and C is 158 mm

For detailed tipping calculations please refer to: <https://tipper.hyva.com>

Pos.	Part no.	Description	Qty.
C01	71839121	DUST COVER FE 149-4/157-4	1
P01	70463371	PISTON MN2 S 099-1365-HC	1
P02	70209310 K	SLIDER MN 099 (2 x 1/2) A22	1
P03	70216099 K	OUTER STOPRING MN 099 A22	1
P04	70224099	BOTTOM PLATE PISTON MN 099	1
P05	01770580 K	CIRCLIP 90 DIN 472 (95.5x3.5)	1
P06	70260215 K	O-RING PISTON BOTTOM 099	1
P07	70235400	PISTON EYE SPH. MN 099 MK2 L=075	1
P08	70260115 K	O-RING 82.14 X 3.53 MM	1
P09	71875450 K	SPHERICAL BEARING D.50 MAINT. FREE	1
P10	01770560 K	CIRCLIP 75 DIN 472 (79.5x3.0)	1
P11	71875012	PIN ROUND HEAD GROOVED 8x15 mm	2

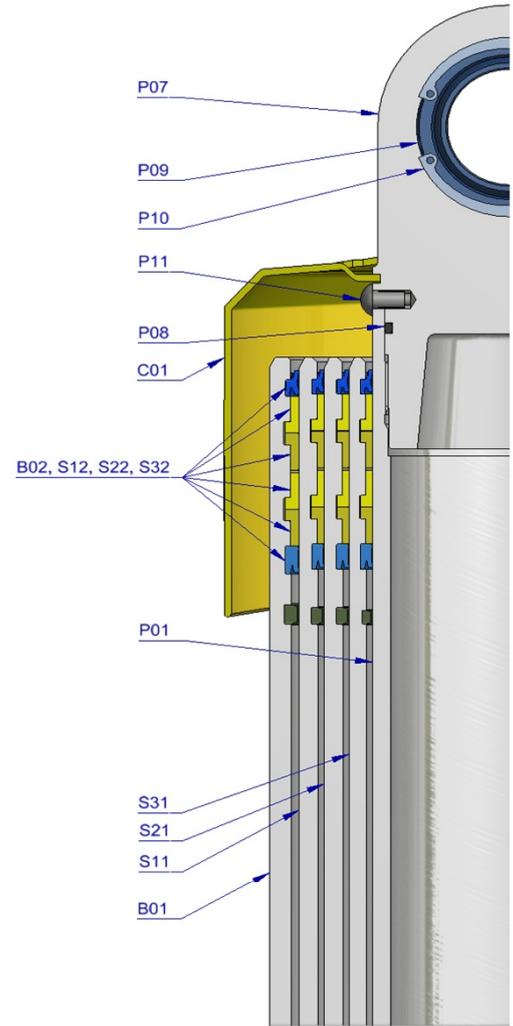


S31	70664370	STAGE MN2 118-1360	1
S32	70203118 K	PACKSET MN 118	1
S33	70209320 K	SLIDER MN 118 (2 x 1/2) A22	1
S34	70216118 K	OUTER STOPRING MN 118 A22	1
S35	70217118 K	LIFTRING MN 118 A22	1

S21	70665370	STAGE MN2 137-1360	1
S22	70203137 K	PACKSET MN 137	1
S23	70207137 K	SLIDER MN 137 A35	1
S24	70216137 K	OUTER STOPRING MN 137 A22	1
S25	70217137 K	LIFTRING MN 137 A22	1

S11	70666370	STAGE MN2 157-1360	1
S12	70203157 K	PACKSET MN 157	1
S13	70207157 K	SLIDER MN 157 A35	1
S14	70216157 K	OUTER STOPRING MN 157 A22	1
S15	70213157 K	LIFTRING MN 157x5 MK2	1

B01	70367400	BASE MN2 S 179-1360	1
B02	70203179 K	PACKSET MN 179	1
B03	70249030	THREADED BOTTOM MN2 179-4/4SAE-90	1
B04	01226740 K	O-RING 174 X 4 NBR 70 SHORE A	1
B05	70250179 K	BACK-UP RING PTFE STMS 180.1 X 173.5 X 2	1
B06	01225564 K	O-RING 173 X 3 NBR 70 SHORE A	1
B07	71875450 K	SPHERICAL BEARING D.50 MAINT. FREE	1
B08	01770560 K	CIRCLIP 75 DIN 472 (79.5x3.0)	1
B09	01792569 K	LOCKING SCREW M6X8 INT. HEX. DIN 916	1
B10	15013720 K	BOLT HSHC M8X16X1 Q8.8 DIN 916 ZP	2

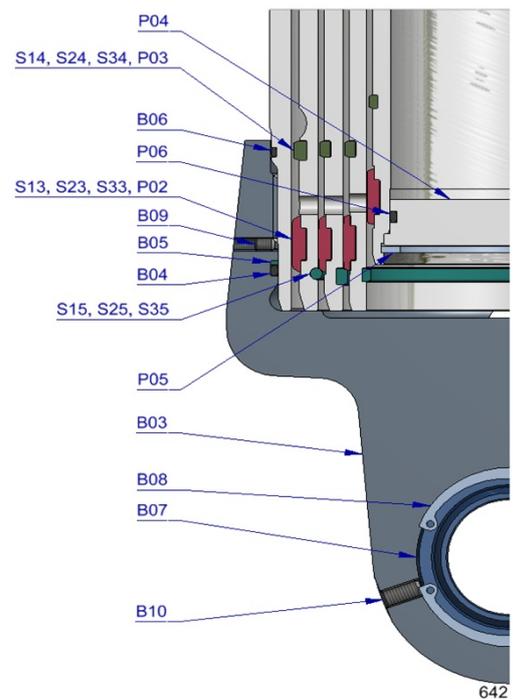

Seal kit complete

	71907645 K	Consists of all packsets with packset grease and O-rings	
--	------------	--	--

Notes

The inner stopring is pre-mounted in the grooves on spare bases and stages. Therefore, when ordering new tubes, it is not required to order inner stoprings separately.