




- * Surge overload rating 60 amperes peak
- * Low forward voltage drop
- * Small size, simple installation
- * Leads solderable per MIL - STD - 202, method 208

50 to 1000 Volts
CURRENT
10.0 Amperes

KBPC-8/10

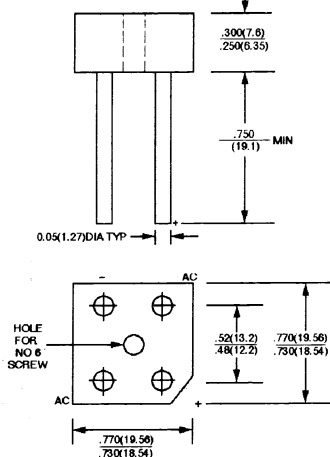

Dimensions in inches and (millimeters)


Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	KBPC 1000	KBPC 1001	KBPC 1002	KBPC 1004	KBPC 1006	KBPC 1008	KBPC 1010	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum D.C Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_C = 50^{\circ}C^{(1,2)}$	$I_{F(AV)}$	10							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	250							A
Maximum Forward Voltage Drop per element @ 5A	V_F	1.10							V
Maximum Reverse Current at Rated @ $T_A = 25^{\circ}C$ D.C. Blocking Voltage per element @ $T_A = 100^{\circ}C$	I_R	10 500							μA μA
Operating Temperature Range	T_J	- 55 to + 125							$^{\circ}C$
Storage Temperature Range	T_{STG}	- 55 to + 150							$^{\circ}C$


NOTE: (1) Bolt down on heat – sink with silicone thermal compound between bridge and mounting surface for maximum heat transfer with #6 screw
(2) Unit mounted on 5.5×6.0×0.11" thick (14×15×0.3cm) Al. Plate

RATINGS AND CHARACTERISTIC CURVES (KBPC1000 THRU KBPC1010)


**FIG.1 - MAXIMUM NON - REPETITIVE
FORWARD SURGE CURRENT - PER ELEMENT**

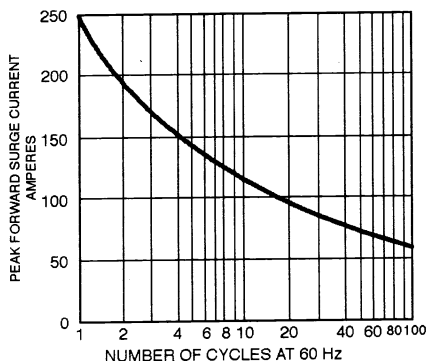

**FIG.2 - TYPICAL FORWARD OUTPUT CURRENT
DERATING CURVE**

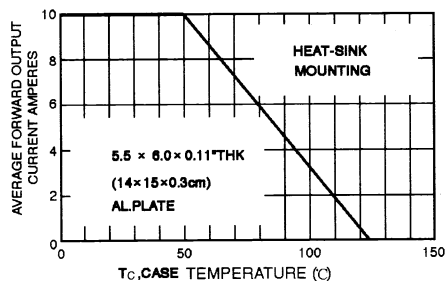

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS
PER ELEMENT**

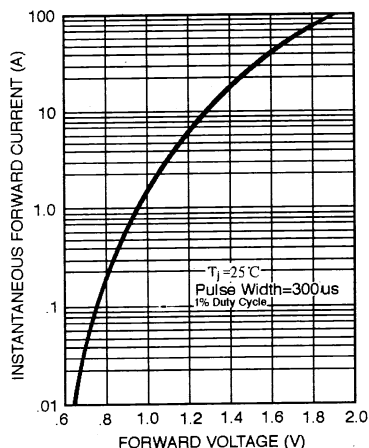

**FIG.4 - TYPICAL REVERSE
CHARACTERISTICS - PER ELEMENT**

