
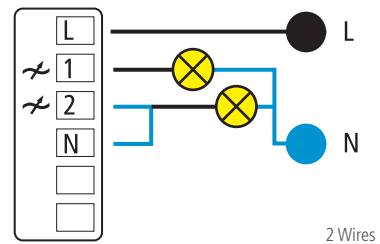


## Vitrum II BS Dimmer Classic

cod. 01B020040

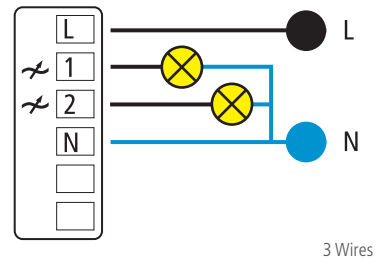

### FUNCTIONAL SPECIFICATION

- Two-button light switch
- Touch control with capacitive technology and concave surface for tactile Feedback
- Acoustic feedback signal
- Crown backlit by low-consumption LEDs

### COMMAND MODE

- Two capacitive button with "On-Off" control
- Dimming touch:
- Single short pressure for "On-Off"
- Keeping pressure: light increase from 0 to 100%

### MECHANICAL CHARACTERISTICS

- Box British 1 Gang (wall or plasterboard)
- Dimension 95x95mm
- Depth at sight 8 mm
- Operating temperature: 0-40°C
- Button Diameter 16 mm
- Light ring diameter 20 mm
- Weight: 200 g.

### ELECTRICAL CHARACTERISTICS

- Power: 230V ac
- Energy consumption: < 1W
- Configurazione a 2 Wires se Output ">40 VA", a 3 wires se Output "<40 VA"
- Output power per channel "> 20 VA e < 150VA" (Max 300VA totali)
- Control of following lamp:
  - incandenscent
  - halogenal
  - fluorescent dimmable (DULUX EL Osram e Philips)
- Universal power control: (trailing / leading edge mode)
- Protection for overload and short circuit
- Power Mosfet Technology

Compliant with:

**B.T.:** 2006/95/CE  
**E.M.C.:** 2004/108/CE