



www.vitrum.com

Vitrumino I EU

cod. 0VE010000

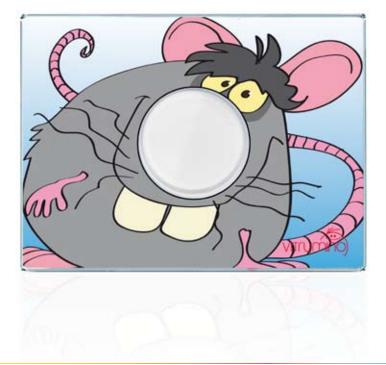



CE

FUNCTIONAL SPECIFICATION

- One-button light switch to control light point and feature courtesy spotlight, with the possibility of lighting in selectable different colors (suitable for the room of your children)
- Touch control with capacitive technology and concave surface for tactile Feedback
- Acoustic feedback signal
- Crown backlit by low-consumption LEDs

COMMAND MODE

- One capacitive button with "On-Off" / Dimmer control
- Dimming touch
- Single short pressure for "On-Off"
- Keeping pressure: light increase from 0 to 100%
- ECO Function: steps 0 -65%-100%
- Dimmering by circular touch (iPOD like control) (increasing with clockwise touch, decreasing with counter clockwise touch)

MECHANICAL CHARACTERISTICS

- Fitting Box 503 (wall or plasterboard)
- Dimension 126x95mm;
- Depth at sight 8 mm
- Button Diameter 38 mm
- Light ring diameter 42 mm
- Weight: 210 g

THINK SIMPLE™

Think Simple SpA reserves the right to modify its products at any time and without notice in order to better their quality and functionality. Therefore, all the information given in this datasheet is to be considered subject to possible modifications.

ELECTRICAL CHARACTERISTICS

- Power: 230V ac ~ 50Hz
- Energy consumption: < 1 W
- Universal power control: (trailing / leading edge mode)
 Output power per channel:
 - Output power per channel: Trailing edge mode, suitable to drive: (resistive loads) Max 300W Leading edge mode, suitable to drive: (inductive loads) Max 200W
- Protection Degree IP 40
- Protection for overload and short circuit
- Eco-Switch operating mode
- Control of following lamp: Incandescent
- Halogen / fluorescent dimmable (DULUX EL Osram e Philips)
- Operating Temperature 0° 40° C
- Compliant with: **B.T.** : 2006/95/CE

E.M.C. : 2004/108/CE

Think Simple SpA

support@thinksimple.it

CF / P.Iva 01675770935 www.thinksimple.it info@thinksimple.it

Head Office

viale Lino Zanussi, 3 33170 Pordenone Tel +39 0434 516 216 Fax +39 0434 516 230

Sales Office

corso Garibaldi, 86 20121 Milano Tel +39 02 655 600 29 Fax +39 02 454 982 95