



**UZMAN  
GENERATOR**

**400** KVA  
**C-SDEC**

GENERAL FEATURES		PRIME	STANDBY
Power	KVA	360	400
Power	KW	288	320
Standard Voltage	V	400/230	
Revolutions per minute	r.p.m	1500	
Rated at power factor	Cos Phi	0,8	

**STANDBY POWER;**

Supplying of emergency electrical power at variable load, in the event of normal utility power failure.

This rating is maximum power, no overload capability is available.

**PRIME POWER;**

Supplying of electrical power at variable load for an unlimited number of hours in the event of normal utility power failure. 10% over load capability is available.


**STANDARD FEATURES**

- 4 Stroke, 1500 RPM, water cooled heavy duty diesel
- Dry type replaceable air filter
- Radiator capable of cooling up to 50 ° C
- Flexible oil pipes and oil draining valve
- Pre-heater
- 4 Poles, synchronize, single bearing, brushless alternator
- Batteries and cables
- Electrostatic paint coated, steel, welded chassis
- Fuel tank housed in the chassis.
- Industrial type silencer
- Electronic battery charger
- Electrical wiring diagram
- User manual and operating manual

**OPTIONAL FEATURES**

- Soundproof canopy
- Automatic transfer switch
- Circuit breaker
- Trailer / Land transport
- External fuel tank
- Heating system for fuel tank
- Oil heater
- Fuel filling system  
(Automatic / Manuel )
- Analogue indicators
- 1 - 3 Phase switch plugs
- Alarm system for fuel level
- Remote control and

### ENGINE SPECIFICATION

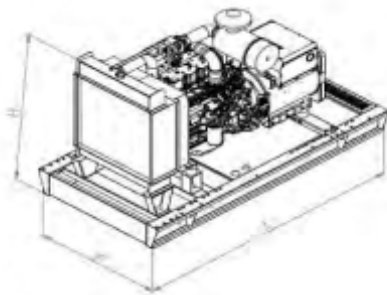
Producer		C-SDEC
Power kW PRP	kW PRP	307
Engine Model		QC12E460D2
Number of Cylinders / Valves		6/24
Time		4
Volume	(lt)	11,8
Air Intake System		Turbocharger
Broke X Stroke	(mm)	128x153
Compression Ratio		17:1
Air Filter		Replaceable Element
Cooling System		Water Cooled (water + 50% antifreeze)
Total Coolant Capacity		80,2
Governor Type		Elektronic
Electrical System		24VDC
Charge Alternator Current		70A
Total Oil Volume	(lt)	41
Exhaust Gas Output Flow Rate PRP	(m3/min)	41,5
Maximum Exhaust Gas Output Temperature	(°C)	600
Combustion Air Flow Rate PRP	(m3/min)	18,6
Cooling Air Flow	(m3/min)	548,4
Starter Power	(kW)	5,5kW
Standard Battery Voltage	VDC	24VDC
Standard Battery Capacity		2x105Ah
Standard Battery Type		Maintenance Free Lead Acid

### ALTERNATOR SPECIFICATIONS

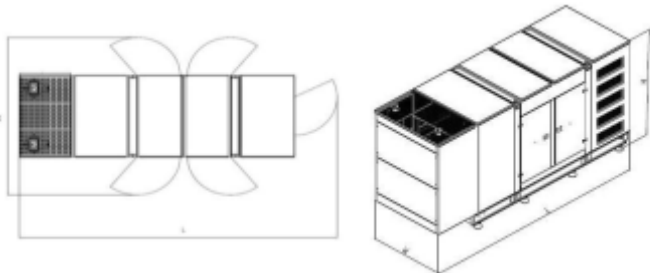
Producer		UZMAN
Model		PRO28LG/4
Voltage		400/230 VAC
Number of Phases		3
Power Factor		0,8
Number of Poles		4
Connection style		Star
Bearing Type		Single bed
Insulation Class		H
Protection Class		Ip23
Winding Step		5/6
Warning System		Self-Excited
Voltage Regulator		Electronic AVR
Efficiency 4/4 400VAC 50Hz	(cos Ph)	95,2
Voltage Regulation		(±) %1
Total Harmonic Component Value		<%3,3
Apparent Power (kVA) Prime 400 VAC 50 Hz 125 C / 40 C		400

**CONTROL PANEL SPECIFICATION**

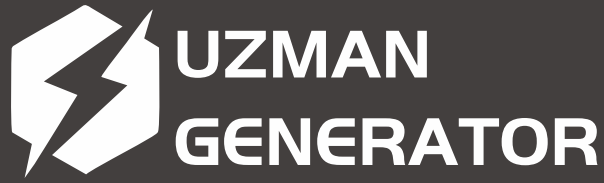
- Diesel and gas genset support
- 400Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable languages
- Waveform display of V & I
- Harmonic analysis of V & I
- 16Amp MCB & GCB outputs
- 8 configurable digital inputs
- 6 configurable digital outputs
- 3 configurable analogue inputs
- Both CANBUS-J1939 & MPU
- 3 configurable service alarms
- Diesel and gas genset support
- 400Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- Multiple automatic exerciser
- Weekly operation schedule
- Dual mutual standby with equal
- Manual “speed fine adjust”
- Automatic fuel pump control
- Disable protections feature
- Excess power protection
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Current unbalance protection
- Voltage unbalance protection
- Fuel filling & fuel theft alarms
- Battery back-up real time clock
- Multiple automatic exerciser
- Weekly operation schedule
- Dual mutual standby with equal
- Manual “speed fine adjust”
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Modem diagnostics display
- Configurable through USB, RS-232 and GPRS
- Free configuration program
- Allows SMS controls
- Ready for central monitoring
- Mobile genset support
- Automatic GSM geo-location
- GPS connectivity (RS232)
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters

**SPECIFICATION WITHOUT CABIN**


Length ( L )	mm	3500
Height ( H )	mm	1700
Width ( W )	mm	1600
Wet weight	kg	1900
Fuel Tank Capacity	L	400

**SPECIFICATION WITH CABIN**


Length ( L )	mm	3500
Height ( H )	mm	1900
Width ( W )	mm	1600
Wet weight	kg	1900
Fuel Tank Capacity	L	400



[www.uzmangenerator.com.tr](http://www.uzmangenerator.com.tr)



Yenidoğan Mah Barbaros Bulvarı No: 65  
Sancaktepe istanbul



+90 216 429 11 53



[www.uzmangenerator.com.tr](http://www.uzmangenerator.com.tr)  
[info@uzmangenerator.com.tr](mailto:info@uzmangenerator.com.tr)