



Relief, P to T High Capacity



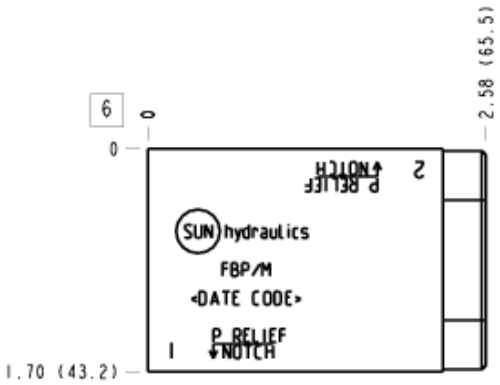

CONFIGURATION

/M Modifier 6061-T651 Aluminum, Metric, Buna-N

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	P to T
Stack Height	1.75 in.
Seal Plate Included (see notes)	Yes

NOTES

- Stack height value in technical data table includes seal retainer plate.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
FBP, /S, /V, /Y	Gage Port (Plugged): 1/4" NPTF;
FBP/M, /T, /W, /Z	Gage Port (Plugged): 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
330-018-002	Plug	1
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1

CONFIGURATION OPTIONS
Model Code Example: FBP/M

MODIFIER (/M)

/M 6061-T651 Aluminum, Metric, Buna-N
6061-T651 Aluminum, Buna-N
/S 65-45-12 Ductile Iron, Buna-N, Blackened
/T 65-45-12 Ductile Iron, Metric, Buna-N, Blackened
/V 6061-T651 Aluminum, Viton
/W 65-45-12 Ductile Iron, Metric, Viton, Blackened
/Y 65-45-12 Ductile Iron, Viton, Blackened
/Z 6061-T651 Aluminum, Metric, Viton

© 2019 Sun Hydraulics