




Directional, Bleed-Off, P to T



Flow Control, Bleed-Off, P to T



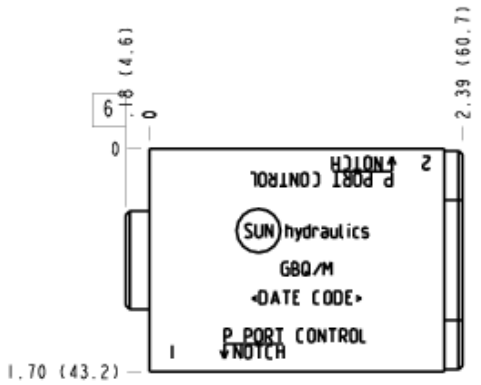

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	P to T
Stack Height	1.75 in.
Seal Plate Included (see notes)	Yes

CONFIGURATION

/M Modifier 6061-T651 Aluminum, Metric, Buna-N

NOTES

- Stack height value in technical data table includes seal retainer plate.
- Customer to install locating pin according to functional orientation required.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
GBQ, /10, /11, /15, /16, /S, /S3, /V, /Y, /Y3	Gage Port (Plugged): 1/4" NPTF;
GBQ/1A, /1B, /1F, /1G, /M, /T, /T3, /W, /W3, /Z	Gage Port (Plugged): 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
330-018-002	Plug	1
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1

CONFIGURATION OPTIONS
Model Code Example: GBQ/M

MODIFIER (/M)

/M 6061-T651 Aluminum, Metric, Buna-N
6061-T651 Aluminum, Buna-N
/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/V 6061-T651 Aluminum, Viton
/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/1B 6061-T651 Aluminum, Metric, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/1A 6061-T651 Aluminum, Metric, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/Z 6061-T651 Aluminum, Metric, Viton
/1G 6061-T651 Aluminum, Metric, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/1F 6061-T651 Aluminum, Metric, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/S 65-45-12 Ductile Iron, Buna-N, Chem. Black
/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
/Y 65-45-12 Ductile Iron, Viton, Chem. Black
/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with

© 2022 Sun Hydraulics

/T3	65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer
/T	65-45-12 Ductile Iron, Metric, Buna-N, Chem. Black
/T3	65-45-12 Ductile Iron, Metric, Buna-N, Trivalent Clear Zinc with Top Sealer
/W	65-45-12 Ductile Iron, Metric, Viton, Chem. Black
/W3	65-45-12 Ductile Iron, Metric, Viton, Trivalent Clear Zinc with Top Sealer

© 2022 Sun Hydraulics