




Relief, A to T High Capacity



Relief, B to T High Capacity



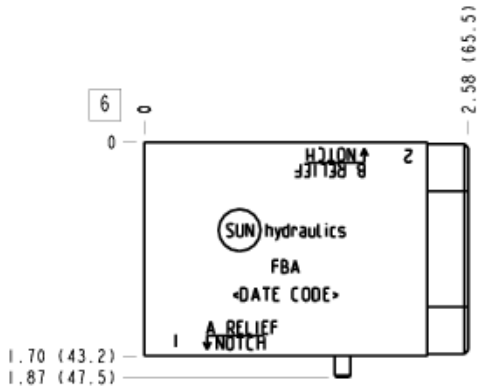

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	A or B to T
Stack Height	1.75 in.
Seal Plate Included (see notes)	Yes

NOTES

- Stack height value in technical data table includes seal retainer plate.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
FBA, /V	Gage Port (Plugged): 1/4" NPTF;
FBA/M, /Z	Gage Port (Plugged): 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
340-003	Pipe Plug	1
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1

CONFIGURATION OPTIONS
Model Code Example: FBA

MODIFIER

	6061-T651 Aluminum, Buna-N
/M	6061-T651 Aluminum, Metric, Buna-N
/S	65-45-12 Ductile Iron, Buna-N, Blackened
/T	65-45-12 Ductile Iron, Metric, Buna-N, Blackened
/V	6061-T651 Aluminum, Viton
/W	65-45-12 Ductile Iron, Metric, Viton, Blackened
/Y	65-45-12 Ductile Iron, Viton, Blackened
/Z	6061-T651 Aluminum, Metric, Viton

© 2019 Sun Hydraulics