

MODEL
WCD

ISO 03: Cover manifold, P to T, A and B blocked
CAVITY: T-8A

sunhydraulics.com/model/WCD



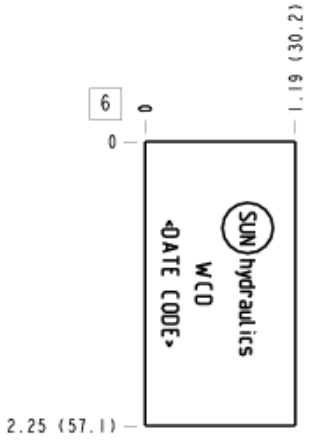

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	Cover manifold, P to T, A and B blocked
Seal Plate Included (see notes)	Yes
Clamp Height	.74 in.
Mounting Hole Diameter	.20 in.
Mounting Hole C'bore Diameter	.36 in.
Mounting Hole C'bore Depth	.50 in.
Mounting Hole Quantity	4

NOTES

- Stack height value in technical data table includes seal retainer plate.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012	O-Ring	4
700-002	Seal Plate	1

CONFIGURATION OPTIONS
Model Code Example: WCD

MODIFIER

	6061-T651 Aluminum, Buna-N
/11	6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/10	6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/V	6061-T651 Aluminum, Viton
/16	6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/15	6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/S	65-45-12 Ductile Iron, Buna-N, Chem. Black
/S3	65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
/Y	65-45-12 Ductile Iron, Viton, Chem. Black
/Y3	65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

© 2023 Sun Hydraulics