



→ Passenger lift for Multi Passenger vehicles, minibuses and ambulances

## DH-PH2.03 • 350 kg



The **DH-PH2** is a **twin-arms lift**, suitable for mounting inside the rear doors of a wide range of Multi Passenger Vehicles, minibuses, and ambulance vehicles.


In comparison to the single arm model, the reinforced construction with 2 arms provides **excellent platform stability**. It increases the safety and the sense of safety of the platform occupant.

In standard execution, the DH-PH2 is equipped with a closed platform surface in mesh steel.


The **horizontally folding platform [option OWU003]** offers improved **rearward vision** to the driver. Thanks to its reduced height, it is perfectly suited to **vehicles with reduced roof level**.

The **vertical split platform [option OWU002]** offers a much **improved rearward vision** to the driver, a fast escape route in case of emergency and an **easy access** to the vehicle interior (e.g. to load and unload luggage).


Standard




Option OWU002



Option OWU003



# Safe, reliable and comfortable lift with 2 lift arms

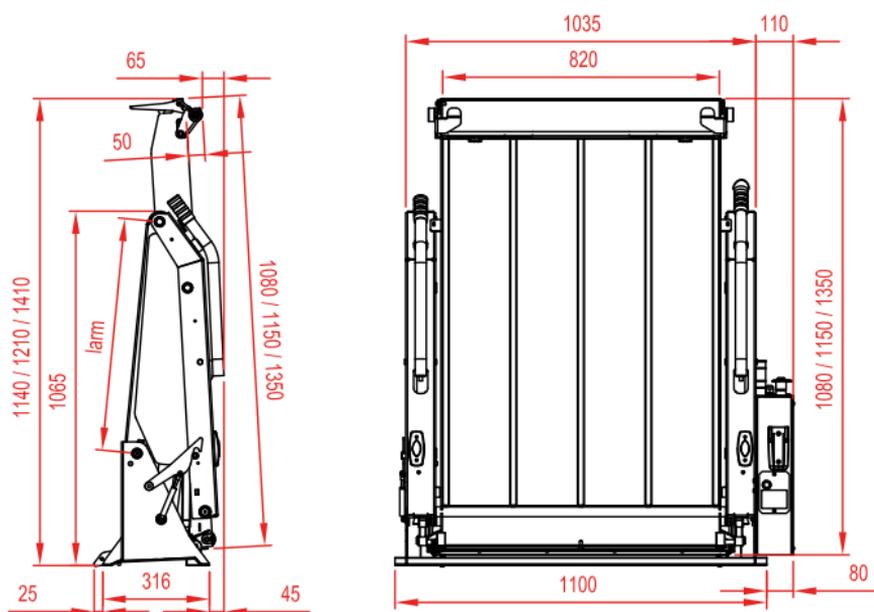

## Lift capacity

CAP
350 kg

## Weights [see pg. 19]

Meshed steel 350 kg	
1350 x 820	138 kg
1150 x 820	134 kg
1080 x 820	132 kg
OWU002	+10 kg
OWU003	+6 kg

## Fitting dimensions

larm	700
vfh max.	900

## Technical specifications

Lift frame	2 lift arms
Cylinders	2 lift cylinders
Type of ride [see pg. 8-9]	Flat platform, level ride
Platform details	<ul style="list-style-type: none"> <li>Reinforced platform in meshed steel</li> <li>Automatic roll-stop at the outboard platform edge</li> <li>Automatic bridge plate and toe-guard at the inboard platform edge</li> </ul>
Safety rails	2, left & right, folding automatically
Standard platform depths	<ul style="list-style-type: none"> <li>1080 - 1150 - 1350 mm standard</li> <li>1150 - 1350 mm for OWU002</li> <li>1350 mm for OWU003</li> <li>Other depths on request [OWP002.L]</li> </ul>
Standard platform widths	820 mm standard / 920 mm optional [OWP002.W]
Std. control unit [see pg. 11]	OAE001
Standard finish of the lift frame	Protection PLUS [OAT102]