




## TECH Uni-Seal Ultra Repairs

- Our top-selling and most highly recommended one-piece repairs.
- Gray cushion gum permanently bonds the repair to the tire.
- Gray cushion gum on the rubber stem to permanently seal out moisture and contaminants. Lead wire for easy installation.
- Can be used in radial and bias tires.




Item No.	Description	Prepared Injury Size mm / in.	Box Qty.				
249UL	UL3 UNI-SEAL ULTRA	3mm / 1/8"	24	•	•		
250UL	UL6 UNI-SEAL ULTRA	6mm / 1/4"	14	•	•	•	
250UL/24	UL6 UNI-SEAL ULTRA	6mm / 1/4"	24	•	•	•	
251UL	UL8 UNI-SEAL ULTRA	8mm / 5/16"	14	•	•	•	
251UL/24	UL8 UNI-SEAL ULTRA	8mm / 5/16"	24	•	•	•	
290UL	UL10N NON-FABRIC-REINFORCED UNI-SEAL ULTRA	10mm / 3/8"	10		•	•	•

## TECH Uni-Seal Ultra Max Repairs


- Cross-weave fabric offers reinforcement for both radial and bias tires.
- Gray cushion gum on the cap and stem permanently bonds the repair to the tire and seals out moisture and contaminants.
- Lead wire for easy installation.




Item No.	Description	Prepared Injury Size mm / in.	Box Qty.				
291UL	UL10 UNI-SEAL ULTRA MAX	10mm / 3/8"	10	•	•	•	•
292UL	UL13 UNI-SEAL ULTRA MAX	13mm / 1/2"	10		•	•	•

# Uni-Seal Puncture Repair Chart

- Uni-Seal Ultra Repairs are designed for use in the crown (T-T) area of the tire only.
- All injuries larger than those defined in the chart, or outside the specified T-T area, must be treated as a section repair.
- Maximum 35° angle for Uni-Seal Repairs. If the injury exceeds 35°, a two-piece repair must be used.

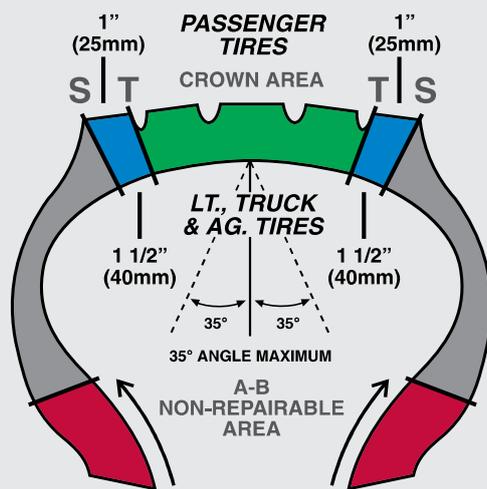


RADIAL AND BIAS PASSENGER TIRE PUNCTURE LIMITATIONS				
TIRE AREA	PREPARED INJURY SIZE	REPAIR UNIT	CARBIDE CUTTER	QUICK CHANGE ADAPTOR
T-T	3mm (1/8")	UL3 (249UL)	269	S1043
T-T	6mm (1/4")	UL6 (250UL)	270	S1040
RADIAL AND BIAS TRUCK TIRE PUNCTURE LIMITATIONS				
T-T	8mm (5/16")	UL8 (251UL)	271	S1041
T-T	10mm (3/8")	UL10 (291UL)	271/38	S1041/38
T-T	10mm (3/8")	UL10N (290UL)	271/38	S1041/38

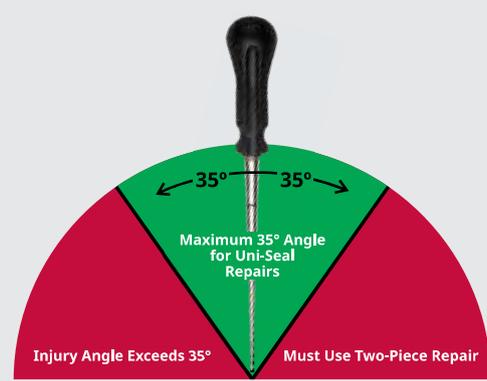

## TECH Bias Uni-Seal Repairs

- Gray cushion gum on the cap and stem permanently bonds the repair to the tire and seals out moisture and contaminants.
- Fabric reinforced for use in bias tires only.

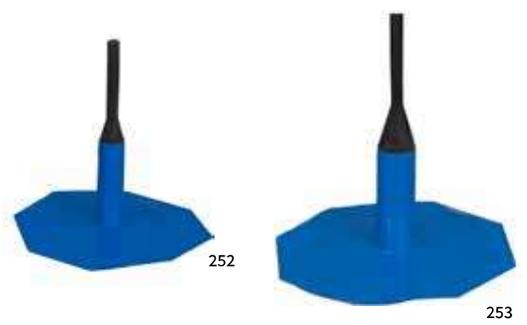

Item No.	Description	Prepared Injury Size mm / in.	Box Qty.			
252	BIAS UNI-SEAL	13mm / 1/2"	6	•	•	•
253	BIAS UNI-SEAL, 14 ply rated	20mm / 3/4"	6		•	•