


TEKNİK VERİLER | TECHNICAL DATA

4 DELİKLİ ISO EKSENEL PİSTONLU POMPA | 4 HOLES ISO BENT AXIS PUMP

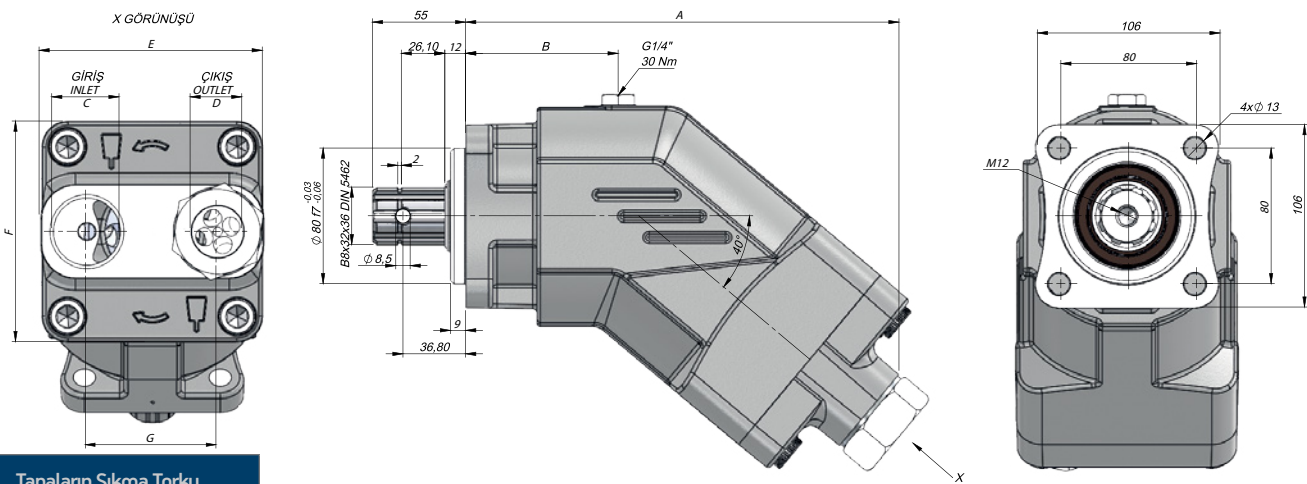

Tapaların Sıkma Torku Tightening Torque Of The Plugs	
G1/2"	55-65 Nm
G3/4"	90-100 Nm
G1"	135-160 Nm
G1 1/4"	200-230 Nm

Kod Code	İletim Hacmi Displacement	Maks.Sürekli Basınç Max.Continuous Pressure	Min. Hız Min.Speed	Maks. Hız Max. Speed (RPM)		A	B	C	D	E	F	G
	(cm³/rev)	(100%)(BAR)	(RPM)	(NOM)	(MAX.)	(mm)	(mm)	(inch)	(inch)	(mm)	(mm)	(mm)
AP022SF1(1)1 AP022SF1(2)1	22	350	400	3050	4300	180	58	G3/4"	G1/2"	89	89	52
AP033SF1(1)1 AP033SF1(2)1	33			2750	3900							
AP045SF1(1)1 AP045SF1(2)1	45			2650	3800	210	78	G1"	G3/4"	108.7	108.7	59
AP056SF1(1)1 AP056SF1(2)1	56			2550	3700	218	80			110.5	108	64
AP065SF1(1)1 AP065SF1(2)1	65			2200	3200							
AP080SF1(1)1 AP080SF1(2)1	80			2150	3100	245	94	G1 1/4"	G1"	127	118	69
AP107SF1(1)1 AP107SF1(2)1	107			2000	2800	255				131.6	130	77
AP125SF1(1)1 AP125SF1(2)1	125			250	300							

*(1) - Left - Sol

*(2) - Right - Sağ