Copyright c 2010. Tutti i diritti sulle immagini ed i testi sono riservati. Sono vietate la riproduzione e diffusione, anche parziale, in qualsiasi forma, delle fotografie e dei testi. I trasgressori saranno perseguiti a norma di legge. Tutti i prodotti illustrati costituiscono creazione di proprietà della società Gruppo Piazzetta SpA. Ogni diritto di sfruttamento dei modelli è riservato. I/Il marchio/i ed i segni distintivi della società sono di proprietà esclusiva della satessa.

E927 D

The decoration embellishes the clear-cut cladding of this stove, which blends in well with current furnishings

GENERAL TECHNICAL CHARACTERISTICS

Natural heating distribution
Radiant, conduction and natural convection heating

Multifuoco System Plus
Optional forced ventilation kit with four electronic controlled power levels and LCD remote control.
Warm air ducting up to 10 m

Heating with Multifuoco System®
Optional four speed forced ventilation kit with remote control.
Warm air ducting up to 10 m

Tertiary air system
Better performances. The preheated tertiary air system fully optimizes combustion and ensures high efficiency with low emission into the atmosphere.

Structure
Enamelled steel with door and grate in cast iron, firebox in Aluker®

Majolica cladding
Unique large hand-made pieces

Air Glass System
Self-cleaning ceramic glass resistant up to 750°C

Easy Cleaning
Quick and easy maintenance, removable ash drawer

Wellness
Humidifier with aroma diffuser

TECHNICAL DRAWING

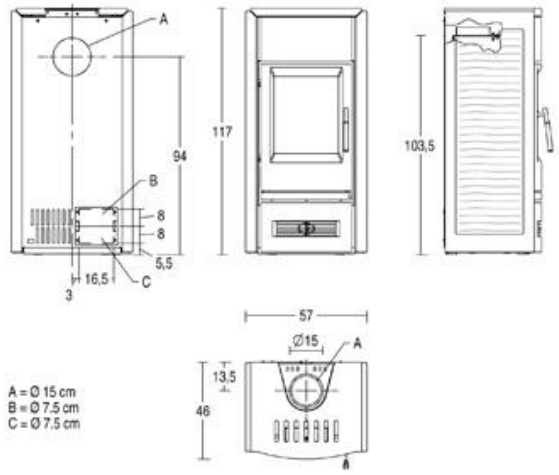

TECHNICAL DATA

Room heating capacity (min-max)	m^3	140 - 235
Nominal thermal efficiency	%	80,8
Rated heat output	kW	8,2
Consumption at rated heat output	Kg/h	2,0
Maximum heat output	kW	10,0
Maximum consumption		2,9
Dimensions WxDxH	cm	57,4x46x117
Cladding		majolica
Front		steel
Firebox		enamelled steel
Primary and secondary air		adjustable
Tertiary air		predetermined and pre-heated
Air combustion kit		optional
Firebox		Aluker®
Brazier		cast iron
Flue outlet Ø	cm	15. top or rear
Ash drawer		removable
Door		cast iron
Ceramic glass		self-cleaning resistant up to 750°C
Door handle		steel handle with silicon sleeve
Wellness -umidifier in stainless steel		yes
Oven in stainless steel (LxWxH)	cm	no
Multifuoco System®		optional. 4 levels
Multifuoco System Plus		optional. 4 levels speed
Front air vents-orientable		yes - yes
Forced Convection kit		no
Total weight	Kg	

The availability of models may vary from Country to Country.