

# DISPENSERS PIUSIBOX

**MADE  
IN  
ITALY**

**EN.** Quite often the hard environmental conditions can potentially threaten the re-fuelling operation of OTR equipment and vehicles. PIUSIBOX project is the answer to the need of re-fuelling quickly and safely in almost any place.

**An important support for the reliability and long last life of your equipment.**

Technical specifications:  
A powerful and reliable self-priming transfer pump capable of delivering 45 l/min, complete with cables and switch. Delivery hose and pump nozzle. Suction hose with foot valve.

**Even more compact with shortened spout and tubes of reduced section for greater ease of closing after use.**

**ES.** Muy a menudo las condiciones del medio ambiente afectan el proceso de dispensar gasolina en las máquinas o los vehículos. PIUSIBOX es la respuesta a esta necesidad, proporcionando un dispensador rápido que trabaja en prácticamente cualquier lugar y con seguridad.

**Un equipo para el soporte, fiabilidad y larga vida de su equipo.**

Características técnicas:  
Potente y fiable bomba de dispensación autocebante capaz de suministrar 45 l/min, incluye cables e interruptor.  
Tubo de impulsión con pistola de suministro  
Tubo de aspiración con válvula de pie.

**Aún más compacto con boca de descarga acortada y tubos de sección reducida para ofrecer una mayor facilidad de cierre después del uso.**

**RU.** Часто неблагоприятные условия могут серьезно усложнить заправку машин для земельных работ и техники. Проект PIUSIBOX рожден, чтобы предоставить возможность осуществлять быструю и надежную заправку в любом месте.

**Важная поддержка для обеспечения надежности и долговечности вашей техники.**

Техническая спецификация: Мощный и надежный самозаливающийся насос для перекачивания, способный подавать до 45 л/мин, оснащен кабелями и выключателем. Гибкая нагнетательная труба и пистолет. Гибкая всасывающая труба с донным клапаном.

Еще более компактный с укороченным носиком и трубами уменьшенного сечения с целью обеспечения наибольшей легкости при закрытии после использования.


## PERFORMANCE

- Flow rate up to 45 l/min
- 12-24 V DC operation
- Duty cycle 30 min.

- Caudal hasta 45 l/min
- Funcionamiento 12-24V DC
- Ciclo de funcionamiento 30 min.

- Расход до 45 л/мин
- Функционирование от источника постоянного тока 12-24 В
- Рабочий цикл 30 мин.

## DIMENSIONS

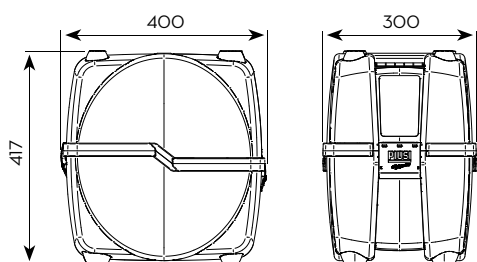

**EVEN MORE FUNCTIONAL**

**REGISTERED DESIGN** **PATENT PENDING**



## PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		N. Boxes/ Europallet	
	kg	lbs	mm	pcs/ box	✈	🚛
<b>F0023100B</b>	9,5	20,9	400x300x420	1	24	32
<b>F0023101B</b>	12	26,5	400x300x420	1	24	32
<b>F0023200B</b>	9,5	20,9	400x300x420	1	24	32
<b>F0023201B</b>	12	26,5	400x300x420	1	24	32

**DISPENSERS**

ANTIFREEZE  
BIO DIESEL  
DIESEL  
FOOD  
GASOLINE  
GREASE  
KEROSENE  
OIL  
AdBlue®  
WATER  
WINDSCREEN

Flow-rate

up to  
**45** l/min  
(up to 11,9 gpm)

New

Easier  
to repack  
after use

**PIUSI**<sup>®</sup>



For diesel fuel only




Easy to repack after use



PIUSIBOX PRO

ON REQUEST

K24 KIT



Code R20764000  
Assembly Kit for K24  
PiusiBox

Cartridge  
(only Piusi Pro)



Code F16483010  
15 pcs / box

FEATURES

Rotating connection



Filter + cartridge  
(only Piusi Pro)



On/Off switch



Foot valve



Vantage model

Easy to handle



PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids	Flow-rate		Voltage			Pump	Duty cycle	Filter	Cartridge	Noz- zle type	Deliv- ery hose 5/8"	Suction hose 3/4"	Foot valve mod. Vantage
		type	l/min	gpm	AC V/Hz DC Volt	Power Watt	Amp. max.	mod.	min.						
F0023100B	PIUSIBOX 12V BASIC	D	45	11,9	12	260	22	BP 3000	30	NO	NO	Man.	4 m.	2 m.	YES
F0023101B	PIUSIBOX 12V PRO	D	43	11,7	12	260	22	BP 3000	30	YES	10 µm	Man.	4 m	2 m	YES
F0023200B	PIUSIBOX 24V BASIC	D	45	11,9	24	310	13	BP 3000	30	NO	NO	Man.	4 m	2 m	YES
F0023201B	PIUSIBOX 24V PRO	D	43	11,7	24	310	13	BP 3000	30	YES	10 µm	Man.	4 m	2 m	YES